
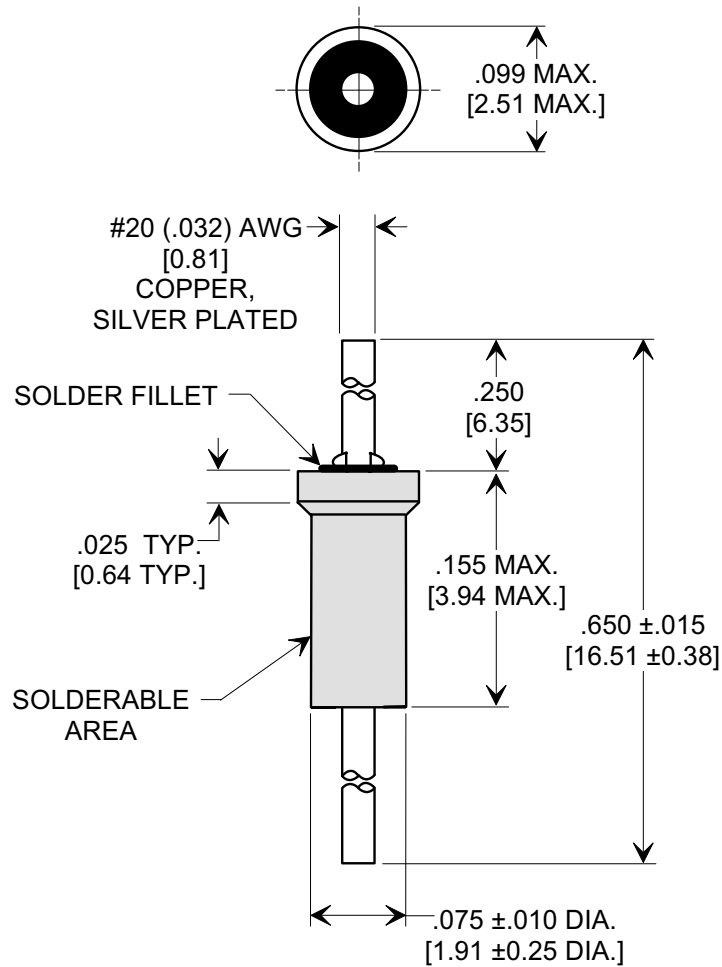



MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



SPECIFICATIONS

CAP. VALUE	470 pF
CAP. TOL.	±20%
TEMP. CHAR.	X5S
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	200 WVDC @ +85°C
DIELECTRIC WITHSTANDING	400 VDC, 2 SEC.

NOTES:

- TUSONIX STANDARD PART NUMBER: 2463-002-X5S0-471M.
TUSONIX RoHS COMPLIANT PART
NUMBER: 2463-002-X5S0-471M LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
NUMBER WHEN ORDERING.
- PART MARKING: STANDARD PART, NO MARKING.
RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

REVISION RECORD Original Release C.O. 19980305-3-02 ADDED NOTES 1, 2, CIRCUIT. DIM. .650 ADDED TOL. S.M. 08-19-05 20050818-7-03	0	1	--TOLERANCES-- Unless Otherwise Specified		Title SHOULDER FEED-THRU	
			DECIMAL ± .031 [0.79]	Drawn S.M. 03-10-98		Scale NONE
			ANGLES ±	Approved J.Mc. 03-10-98		
			 TUCSON, ARIZONA	A	2463-002-X5S0-471M	