



**TRI-STATE ENABLE/DISABLE OSCILLATORS / HCMOS / TTL (FULL & HALF SIZE)**

**MODEL CT  
5.0VDC**

Model	CT	CT
Frequency Range	10kHz ~ 69.999MHz	70MHz ~ 160.0MHz
Frequency Stability	100ppm Standard, Optional Tolerances Available	100ppm Standard, Optional Tolerances Available
Operating Temperature Range	0°C ~+70°C Extended Temperature Ranges Available	0°C ~+70°C Extended Temperature Ranges Available
Storage Temperature Range	-55°C ~+125°C	-55°C ~+125°C
Current Consumption	10.0KHz ~ 23.999MHz: 15mA Max 24.000MHz ~ 69.999MHz: 30mA Max	70.0MHz ~ 99.9MHz: 30mA Max 100.00MHz ~ 129.9MHz: 35mA Max 130.00MHz ~ 160.00MHz: 40mA Max
Supply Voltage	+5 VDC ± 10%	+5 VDC ± 10%
Symmetry	60/40 @ 50% Vcc, Optional Tolerances Available	60/40 @ 50% Vcc, Optional Tolerances Available
Rise & Fall Time (Tr & Tf)	6 nSec Max	3 nSec Max
Logic "1"	4.5 VDC Min	4.5 VDC Min
Logic "0"	0.5 VDC Max	0.5 VDC Max
Output Load (Max)	10TTL / 20pF	2TTL / 15pF
Aging	< 5ppm per year	< 5ppm per year
Enable Input	Enable - Logic "1" 2.0 VDC Min Disable - Logic "0" 0.5 VDC Max	Enable - Logic "1" 2.0 VDC Min Disable - Logic "0" 0.5 VDC Max

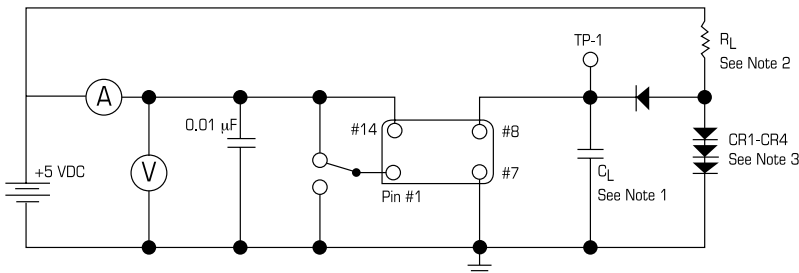

**TEST CIRCUIT FULL SIZE**

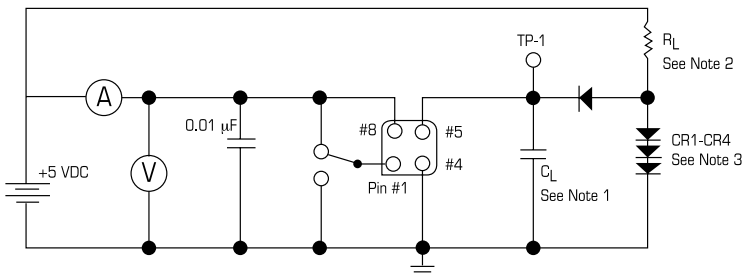

**TEST CIRCUIT HALF SIZE**

**NOTE:**

1.  $C_L$  Capacitance includes probe and test jig 20pF typical (10kHz ~ 69.999MHz)  
 $C_L$  Capacitance includes probe and test jig 15pF typical (70MHz ~ 160.000MHz)
2.  $R_L = 400\Omega - 10TTL$   
 $2k\Omega - 10LSTTL$
3. All diodes are 1N941, 1N43064 or equivalent

**FULL SIZE TRI-STATE**

PINS	CONNECTIONS
1	ENABLE / DISABLE
7	GND
8	OUTPUT
14	+5 VDC ±10%

**HALF SIZE TRI-STATE**

PINS	CONNECTIONS
1	ENABLE / DISABLE
4	GND
5	OUTPUT
8	+5 VDC ±10%

