

		1		2 3			
PRODUCT NO. NOTE 8	SIZE	DIM A	DIM B	DIM C	DIM D	SPECIAL PACKAGING	TAPE WIDTH
87471-605	2 X 5	.266/6.76	.200/5.08	.370/9.40	.3200/8.128	NOTE 7	24mm
-610	2 X 10	.516/13.11	.450/11.43	.620/15.75	.5700/14.478		
-615	2 X 15	.766/19.46	.700/17.78	.870/22.10	.8200/20.828	1	
-620	2 X 20	1.016/25.81	.950/24.13	1.120/28.45	1.0700/27.178	NOTE 7	44mm
-625	2 X 25	1.266/32.16	1.200/30.4	1.370/34.80	1.3200/33.528		
-630	2 X 30	1.516/38.51	1.450/36.8	33 1.620/41.15	1.5700/39.878	1	
-635	2 X 35	1.766/44.86	1.700/43.1	8 1.870/47.50	1.8200/46.228	1	
-640	2 X 40	2.016/51.21	1.950/49.5	3 2.120/53.85	2.0700/52.578	1	
-645	2 X 45	2.266/57.56	2.200/55.8	38 2.370/60.20	2.3200/58.928	1	
87471-650	2 X 50	2.516/63.91	2.450/62.2	2.620/66.55	2.5700/65.278	NOTE 7	88mm
87471-905	2 X 5	.266/6.76	.200/5.08	.370/9.40	.3200/8.128		
-910	2 X 10	.516/13.11	.450/11.43	.620/15.75	.5700/14.478	1	
-915	2 X 15	.766/19.46	.700/17.78	.870/22.10	.8200/20.828	1	
-920	2 X 20	1.016/25.81	.950/24.13	1.120/28.45	1.0700/27.178	1	
-925	2 X 25	1.266/32.16	1.200/30.4	1.370/34.80	1.3200/33.528	1	
-930	2 X 30	1.516/38.51	1.450/36.8	33 1.620/41.15	1.5700/39.878		
-935	2 X 35	1.766/44.86	1.700/43.1	8 1.870/47.50	1.8200/46.228		
-940	2 X 40	2.016/51.21	1.950/49.5	3 2.120/53.85	2.0700/52.578		
-945	2 X 45	2.266/57.56	2.200/55.8	38 2.370/60.20	2.3200/58.928	1	
87471-950	2 X 50	2.516/63.91	2.450/62.2	2.620/66.55	2.5700/65.278	1	
	15	3		.050			

2




NOTES:

- (1) HOUSING MATERIAL: GLASS FILLED THERMOPLASTIC FLAME RETARDANT PER UL 94-0 COLOR : NATURAL
- (2) TERMINAL MATERIAL : BeCu
- (3) TERMINAL PLATING:

 $-6 \rm XXLF~30u^{\prime\prime}/.76 um$ MIN HARD GOLD OVER Ni ON CONTACT ZONES. 100u $^{\prime\prime}/2.54 um$ MIN Sn OVER Ni IN SOLDERING ZONES. OTHERWISE GOLD FLASH OR UNPLATED

-9XXLF 60u"/1.52um MIN HARD GOLD OVER NI ON CONTACT ZONES. 100u"/2.54um MIN Sn OVER NI IN SOLDERING ZONES.OTHERWISE GOLD FLASH OR UNPLATED

- 4. APPLICATION INFORMATION :
 - A. RECOMMENDED MOUNTING PAD PATTERN IS SHOWN IN FIGURE "A".
 - B. MATING PINS TO BE .0176/.447 TO .0181/.459 THICK.
 - C. MATING PIN TIPS TO BE IN TRUE POSITION TO MATING GRID WITHIN .008/.20 DIA.
 - D. SUGGESTED MATING PIN LENGTH .130/3.30 ±.010/.25.
- (5) LEAD TIPS TO BE ABOVE HEEL, UP TO .007/.18 MAX. COPLANARITY TO BE MEASURED AT LOWEST POINT (HEEL).
- 6. ADD "CT" TO END OF DASH NUMBER FOR CONNECTOR WITH VACUUM CAP IN TUBE.
- 7 ADD "TR" TO END OF DASH NUMBER FOR TAPE AND REEL PACKAGED WITH CAP. TOOLED ONLY FOR NOTED
- (8) ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- 9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN A CONVECTION INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

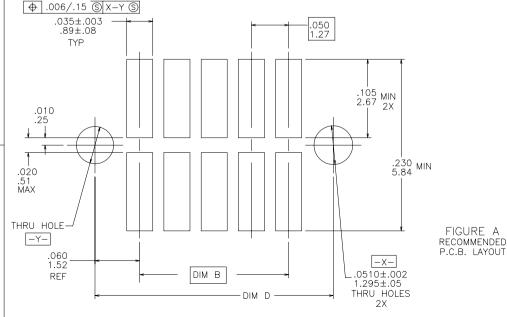

1

Copyright

D

form: A3

mat'l. code					surface /		tolerance		projection		product family												
-				ISO 1302 V			ISO 406 ISO 1101		41		RIB CAGE												
ltr ecn no dr date					:	tolerances unless otherwise specified					7	ク 5	J	title	;								
Υ						angles			XX ±.01/.3 XXX ±.005/.13		INCH/MM		.050/1.27cc V.C.C. SURFACE										
								inear															
						0°±2	•		XXXX ±.0020/.050		scal	e 8	3:1	MOUNT W/POL/HOLD D						OWN			
						dr	J.	. MUSTARD		3/2	5/91		_		dwg	ΠO			S	heet	2 (of 3	size
						engr	engr M. HAH		-IN	3/2	5/91	FC		Zi.			2	7	171				
						chr G. GING		GING	RICH 3/25/91		FCj				O/+/1						Аз		
						appd	٨	M. HAHN		3/25/91			7		type Produc			luct	t Customer [Drawing	
shee	≥†	revi	sion																				
inde	ex sheet		rt.																				
ınde	ex sheet		?†			$_{\perp}$									Ц								

PDM: Rev:Y

STATUS:Released Printed: Jun 26, 2010 6

