


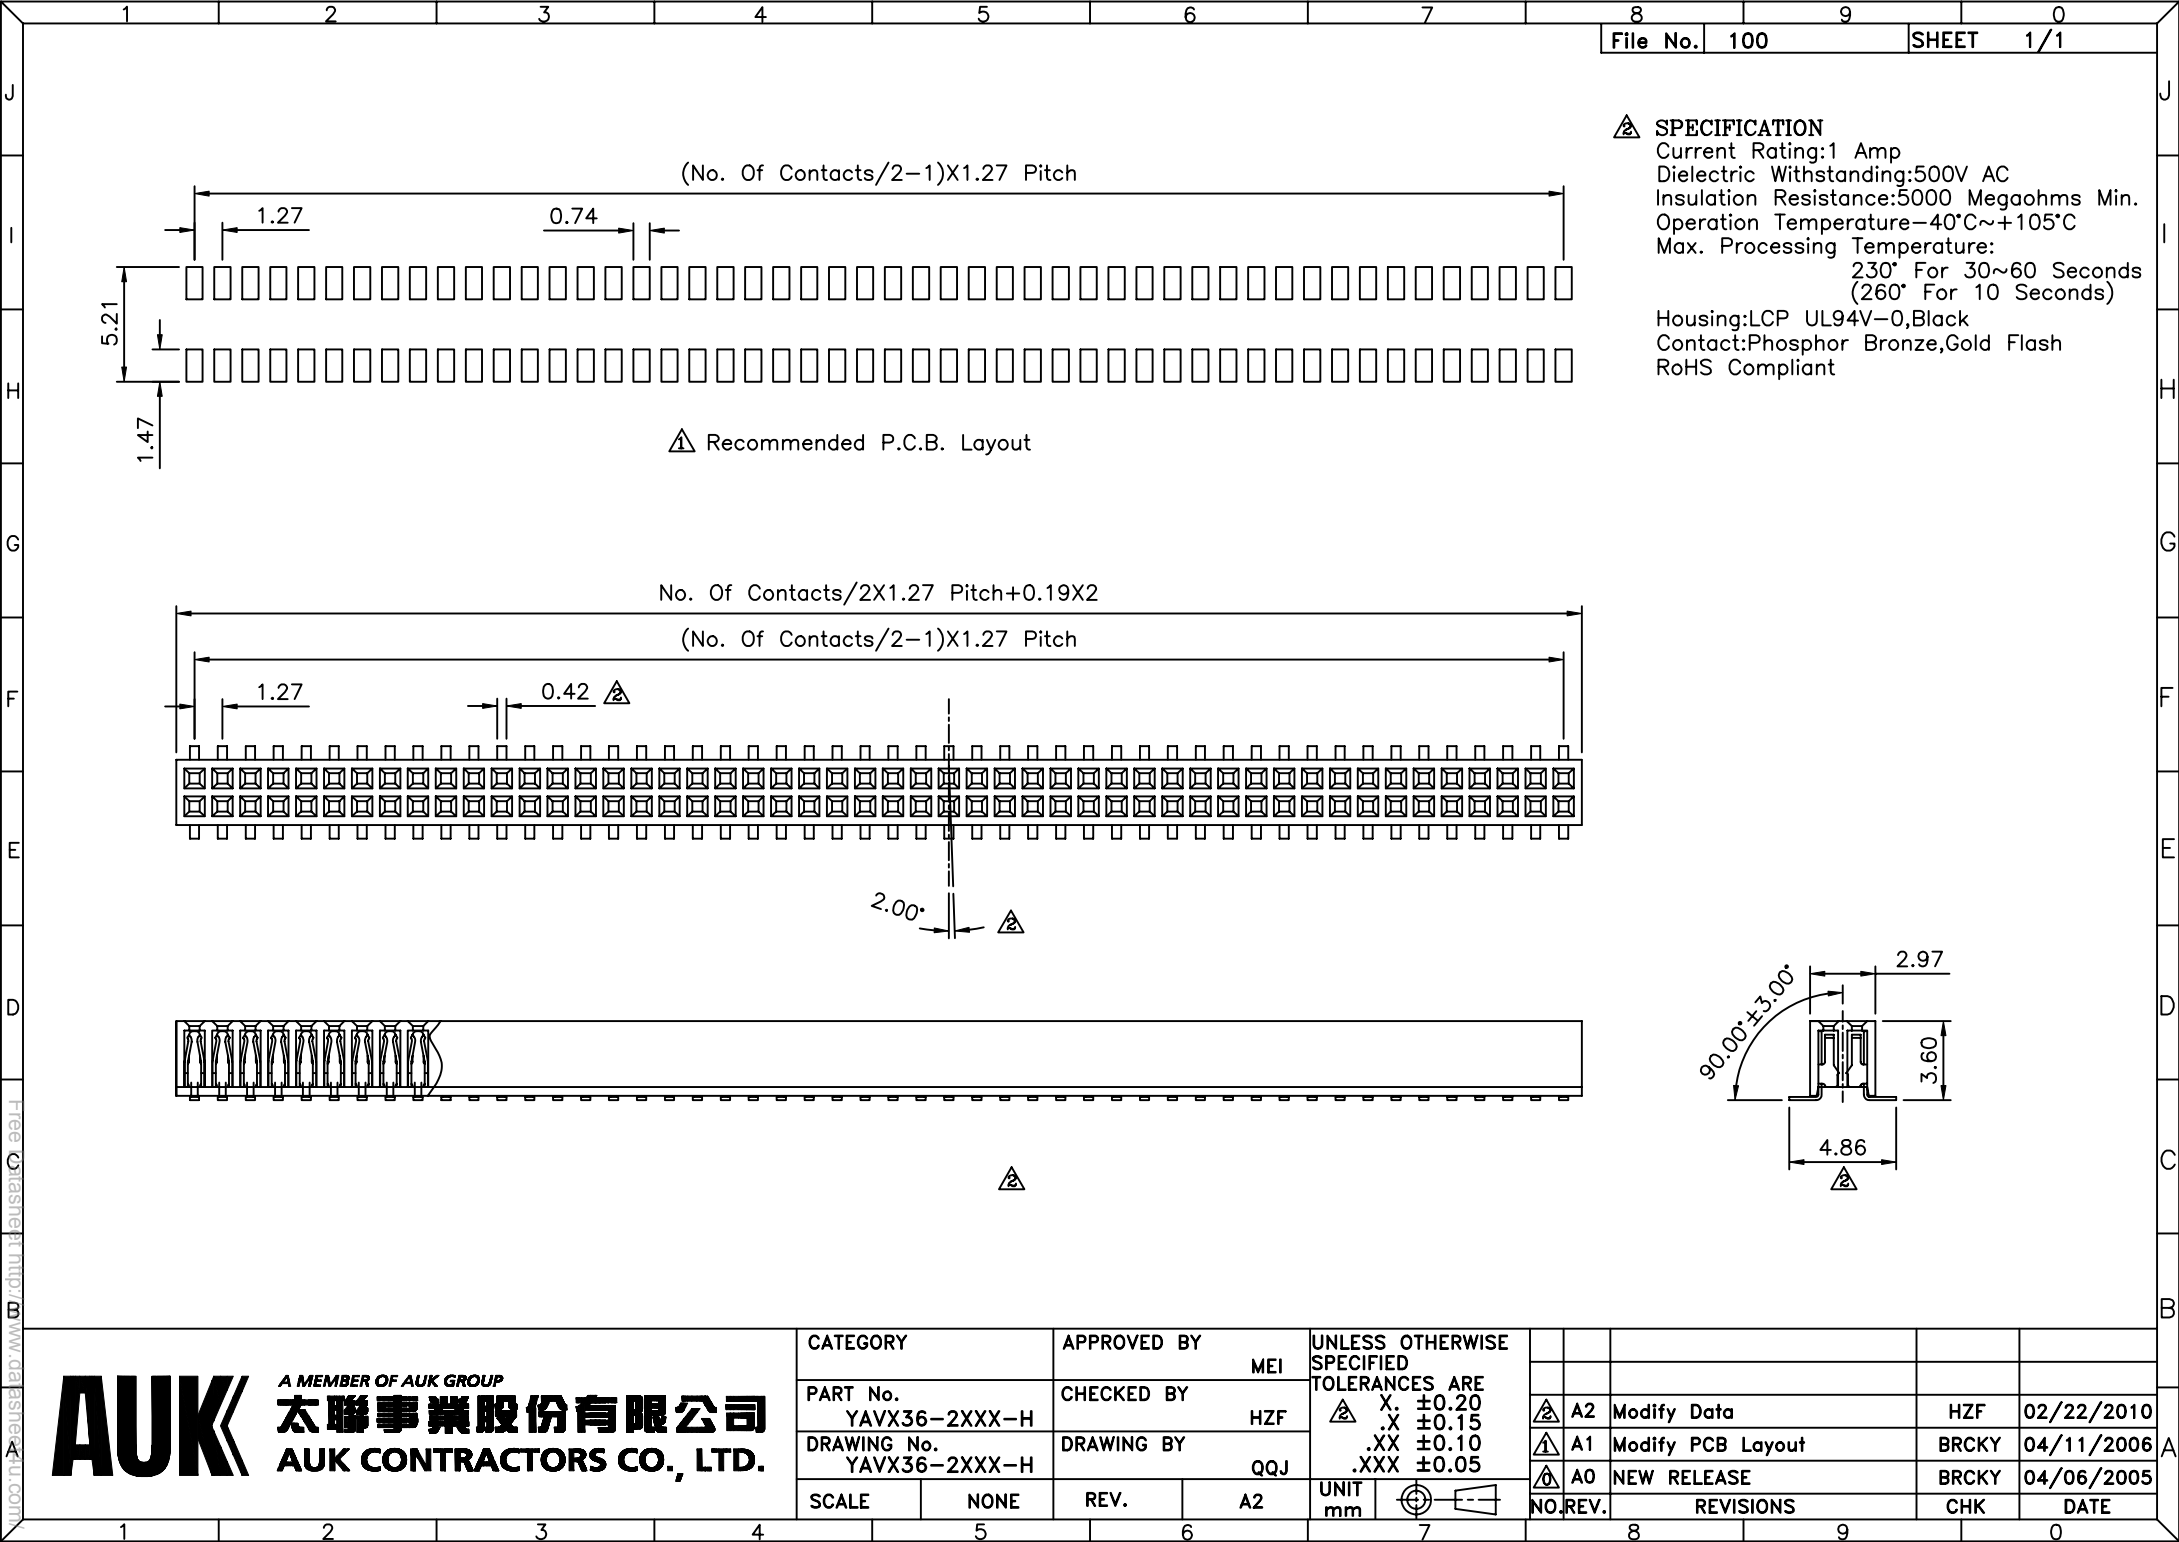

△ SPECIFICATION
Current Rating:1 Amp
Dielectric Withstanding:500V AC
Insulation Resistance:5000 Megaohms Min.
Operation Temperature-40°C~+105°C
Max. Processing Temperature:
230° For 30~60 Seconds
(260° For 10 Seconds)
Housing:LCP UL94V-0,Black
Contact:Phosphor Bronze,Gold Flash
RoHS Compliant

△ Recommended P.C.B. Layout

No. Of Contacts/2X1.27 Pitch+0.19X2

(No. Of Contacts/2-1)X1.27 Pitch

2.00° △

90.00°±3.00°
2.97
3.60
4.86
△

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI	
PART No. YAVX36-2XXX-H		CHECKED BY HZF	
DRAWING No. YAVX36-2XXX-H		DRAWING BY QQJ	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
△ X.	±0.20
.X	±0.15
.XX	±0.10
.XXX	±0.05
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	02/22/2010
△ A1		Modify PCB Layout	BRCKY	04/11/2006
△ A0		NEW RELEASE	BRCKY	04/06/2005