


- Closed frame insulator is vision system compatible.
- High-temp Nylon 46 insulator is suitable for all forms of reflow soldering.
- Traditional gull-wing leads permit visual inspection of solder joints.
- Available packaged in tubes or on tape & reel per EIA-481.
- Uses Mill-Max #1005 pin. See page 137 for details.

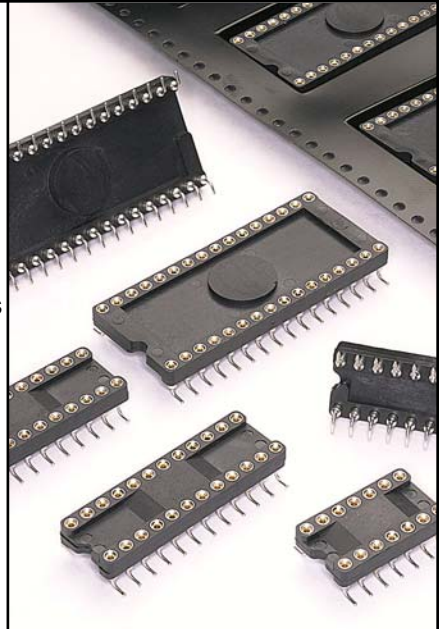

Total number of pins	Ordering Information			QTY PER TUBE	TUBE PACKAGING	TAPE & REEL PACKAGING	TAPE WIDTH (mm)	QTY PER REEL
	A	B	C					
<b>VACUUM PAD TOP SURFACE ONLY</b>								
6	7,6	7,62	10,1	67	210-XX-306-41-105000	210-XX-306-41-105799	16	400
8	10,1	7,62	10,1	50	210-XX-308-41-105000	210-XX-308-41-105799	24	400
14	17,7	7,62	10,1	28	210-XX-314-41-105000	210-XX-314-41-105799	32	400
16	20,3	7,62	10,1	25	210-XX-316-41-105000	210-XX-316-41-105799	32	400
18	22,8	7,62	10,1	22	210-XX-318-41-105000	210-XX-318-41-105799	44	400
20	25,3	7,62	10,1	20	210-XX-320-41-105000	210-XX-320-41-105799	44	400
24	30,4	7,62	10,1	16	210-XX-324-41-105000	210-XX-324-41-105799	44	400
<b>VACUUM PAD TOP AND BOTTOM</b>								
24	30,4	15,24	17,7	16	210-XX-624-41-105000	210-XX-624-41-105799	44	250
28	35,5	15,24	17,7	14	210-XX-628-41-105000	210-XX-628-41-105799	56	250
32	40,6	15,24	17,7	12	210-XX-632-41-105000	210-XX-632-41-105799	56	250
40	50,8	15,24	17,7	10	210-XX-640-41-105000	NOT AVAILABLE		

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select  $\diamond$  plating code.



SPECIFY PLATING CODE XX=	13 $\diamond$	93	43 $\diamond$
Sleeve (Pin)	0,25 $\mu$ m Au	5,08 $\mu$ m Sn/Pb	5,08 $\mu$ m Sn
Contact (Clip)	0,76 $\mu$ m Au	0,76 $\mu$ m Au	0,76 $\mu$ m Au