
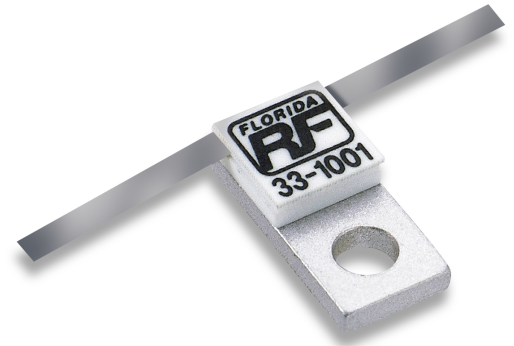


20 Watts **Part No. 33-1001** **Attenuator, Flange Mount**

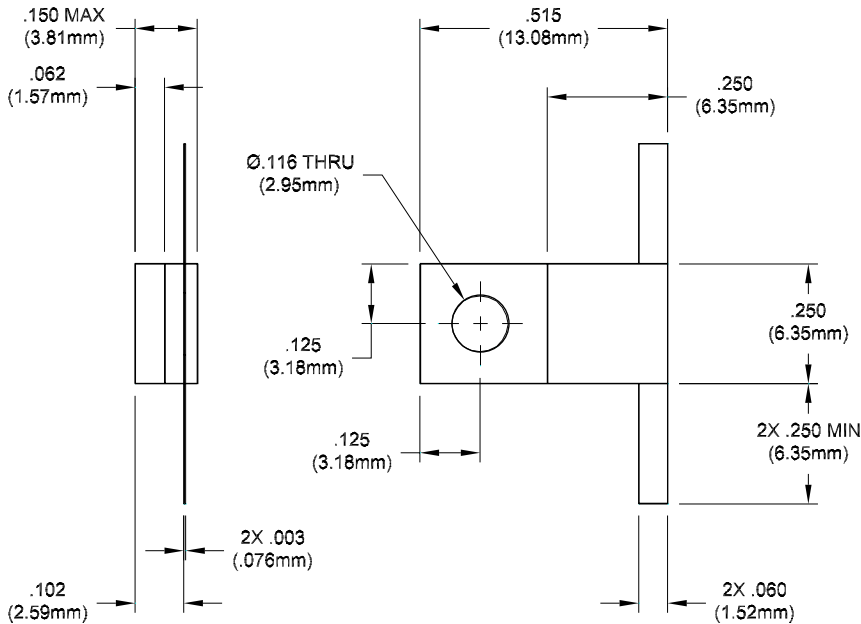

PERFORMANCE SPECIFICATIONS

20 Watts

Part No. 33-1001

Frequency: DC to 4.0 GHz



VSWR (Max): 1.15:1 DC - 2.0

1.50:1 2.0 - 4.0

Attenuation: 1-10 dB $\pm$ 0.5 dB

11-20 dB $\pm$ 1.0 dB

50 Watts **Part No. 33-1002** **Attenuator, Flange Mount**

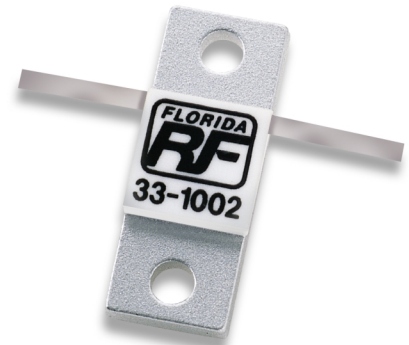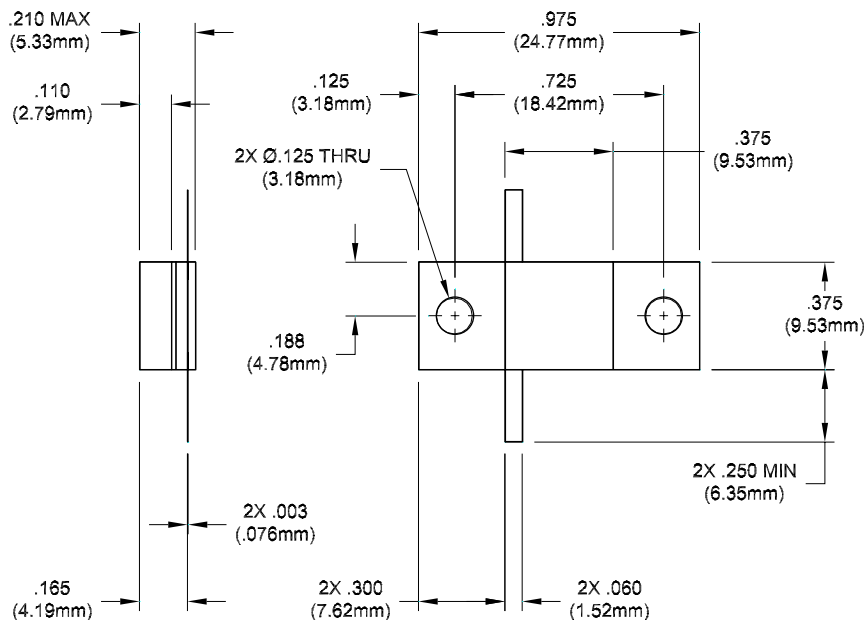

PERFORMANCE SPECIFICATIONS

50 Watts

Part No. 33-1002

Frequency: DC to 1.0 GHz

VSWR (Max): 1.20:1

Attenuation: 1-10 dB $\pm$ 0.5 dB

11-20 dB $\pm$ 1.0 dB

21-30 dB $\pm$ 1.5 dB