

PRODUCT NUMBER

5 4 2 0 2 - X X X - X X - X X X

PLATING

S=15μ"[0.38μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

G=30μ"[0.76μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

T=100μ"[2.5μm]TIN
ON CONTACT AREA
AND ON TAIL(SEE NOTE 8 & 11)

F=2μ"[0.05μm]GOLD
ON CONTACT AREA
AND ON TAIL

POLARIZATION
NOTE 6

PACKAGING TYPE, NOTE 5

POSITIONS PER ROW
02 TO 20

LEAD STYLE	POST
08	0.230/5.84
30	0.318/8.08

LEAD FREE PRODUCT NUMBER

5 4 2 0 2 - X X X X X - X X X LF

PLATING

S=15μ"[0.38μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

G=30μ"[0.76μm]GOLD
ON CONTACT AREA
100μ"[2.5μm]TIN
ON TAIL

T=100μ"[2.5μm]TIN
ON CONTACT AREA
AND ON TAIL(SEE NOTE 8 & 11)

F=2μ"[0.05μm]GOLD
ON CONTACT AREA
AND ON TAIL

LEAD FREE OPTION NOTE 9 & 10

POLARIZATION
NOTE 6

PACKAGING TYPE, NOTE 5

POSITIONS PER ROW
02 TO 20

LEAD STYLE	POST
08	0.230/5.84
30	0.318/8.08

NOTES:

- ① HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC.
FLAME RETARDANT PER UL 94V-0
COLOR: BLACK

THESE PART NUMBERS WILL WITHSTAND EXPOSURE
TO 260 C PEAK TEMPERATURE FOR 20 SECONDS IN
WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

- ② PIN MATERIAL: PHOSPHOR-BRONZE

- ③ TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS ROW.
EXAMPLE: 10 POS., N x .100/2.54=1.00/25.4

- ④ 2LBS/0.9KG MIN. PIN RETENTION IN EITHER DIRECTION.

- ⑤ PACKAGING: _ =POLY BAGS WITHOUT PICKUP CAP.
T =TUBES (OMIT DASH IF NOT POLARIZED).
P =TUBES WITH PICKUP CAPS.
A =TAPE AND REEL WITH PICKUP CAPS.

- ⑥ FOR POLARIZATION, SPECIFY POSITION NUMBER
(i.e. A03=ROW A POS. 3) TO OMIT PIN.
OMIT FROM PRODUCT NUMBER IF THIS FEATURE IS NOT APPLICABLE.
PRODUCT MANAGEMENT APPROVAL REQUIRED PRIOR TO RELEASE
OR SALE OF POLARIZED PRODUCTS.

7. UNDERPLATING: 50μ"/1.2μm Ni.


8. PIN TIPS ON Sn PLATED PRODUCT MAY HAVE BARE METAL ON TWO SIDES,
BOTH ENDS.

- ⑨ PART NUMBERS WITH "LF" SUFFIX AT THE END ARE LEAD FREE.

- ⑩ THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.


- ⑪ "THIS PRODUCT HAS 100% PURE TIN PLATING IN THE INTERFACE AND
HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT
ENVIRONMENTS."

12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

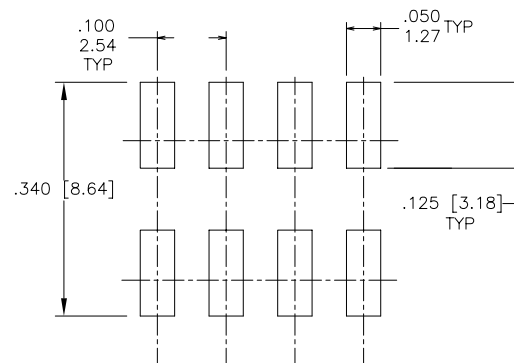


SCALE 4:1

RECOMMENDED PAD LAYOUT

mat'l. code SEE NOTES 1 & 2				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BERGSTIK								
ltr	ec	no	dr	date	tolerances unless otherwise specified					title								
H	J	V21475	GIP	9/17/02	angles linear	.XX±.01/0.3					.100 UNSHROUDED HDR. DUAL ROW VERT. SMT.							
J	V03-0067	HTB	1/17/03	.XXX±.005/0.13														
K	V03-473	HTB	4/25/03	0'±2'		.XXXX±.0020/0.051												
L	V05-0222	LP	3/14/05	dr	D.INGRAM	05/17/99					dwg no		sheet 1 of 3		size			
M	M08-0118	MHT	6/03/05	enr	H.SUNDY	07/21/99					FCI		54202		A3			
N	M06-0268	MHT	7/17/06	chr	H.SUNDY	07/21/99					type		Product		Customer		Drawing	
P	M06-0435	MHT	10/31/06	appd	H.SUNDY	07/21/99												
sheet	revision	P	P	P														
index	sheet	1	2	3														



PRODUCT NUMBER
SEE TABLE

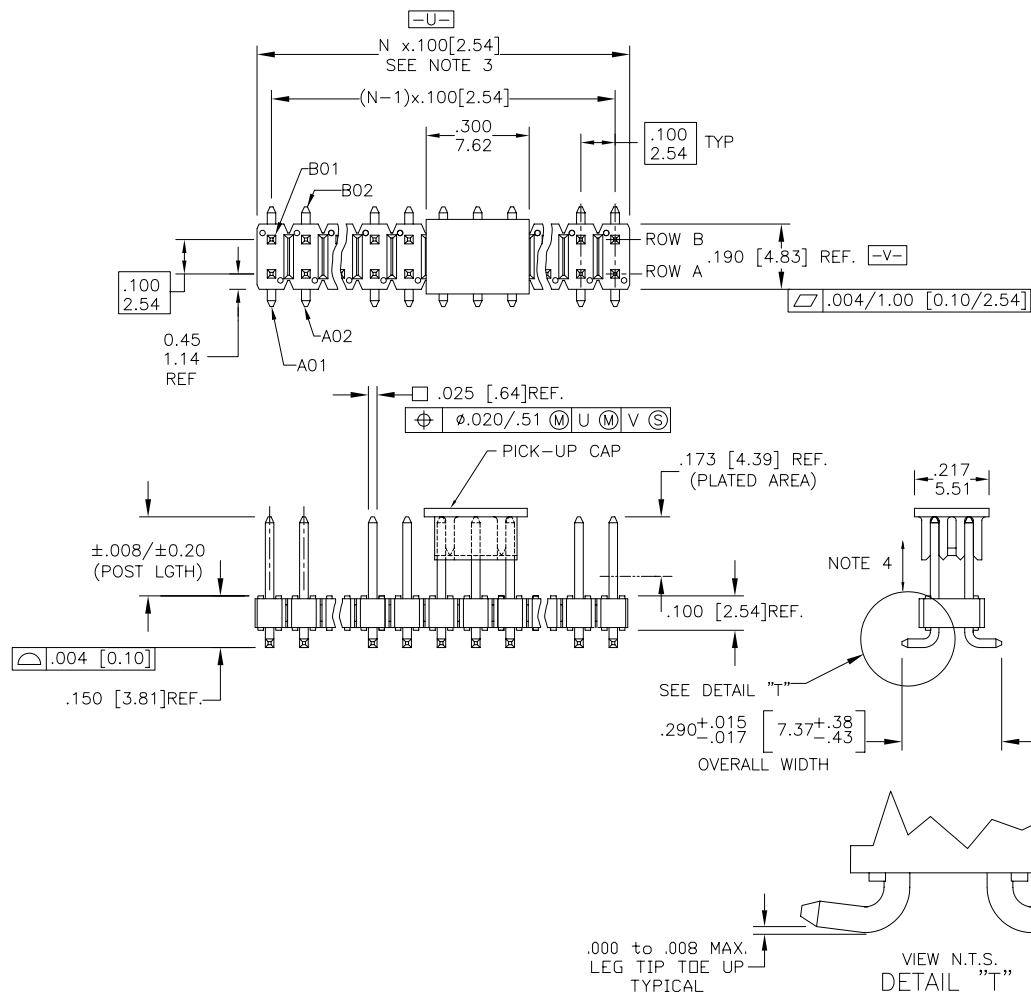

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family BERGSTIK
ltr	ecn	no	dr	date	tolerances unless otherwise specified	scale 1:1	title .100 UNSHROUDED HDR. DUAL ROW VERT. SMT.
P					angles linear .XX±.01/0.3 .xxx±.005/0.13 .xxxx±.0020/0.051		dwg no 54202
					dr D.INGRAM 05/17/99	FCI	sheet 2 of 3 size A3
					enr H.SUNDY 07/21/99		type Product Customer Drawing
					chr H.SUNDY 07/21/99		
					appd H.SUNDY 07/21/99		
sheet index	revision sheet						

TAPE AND REEL PACKAGING

SIZE	LEAD STYLE 08 POST (0.230 [5.84])	LEAD STYLE 30 POST (0.318 [8.08])
2X2	YES	
2X3	YES	
2X4	YES	YES
2X5	YES	
2X6	YES	
2X7	YES	YES
2X8	YES	
2X9		
2X10	YES	
2X11	YES	
2X12		YES
2X13	YES	
2X14		
2X15	YES	
2X16		YES
2X17	YES	
2X18		
2X19		
2X20		

mat'l. code				surface ISO 1302 <input checked="" type="checkbox"/>	tolerance ISO 406 ISO 1101	projection 	product family BERGSTIK
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
P					angles	linear .XX±.01/0.3	.100 UNSHROUDED HDR.
						.xxx±.005/0.13	DUAL ROW VERT. SMT.
					0'±2'	.xxxx±.0020/0.051	scale 1:1
				dr	D.INGRAM	05/17/99	
				enr	H.SUNDY	07/21/99	
				chr	H.SUNDY	07/21/99	
				appd	H.SUNDY	07/21/99	
sheet index	revision sheet						dwg no
							54202
							sheet 3 of 3 size A3
							type Product Customer Drawing

form: A3