




Product Description

Sirenza Microdevices' SHF-0189 is a high performance AlGaAs/GaAs Heterostructure FET (HFET) housed in a low-cost surface-mount plastic package. The HFET technology improves breakdown voltage while minimizing Schottky leakage current resulting in higher PAE and improved linearity.

Output power at 1dB compression for the SHF-0189 is +27 dBm when biased for Class AB operation at 8V,100mA. The +40 dBm third order intercept makes it ideal for high dynamic range, high intercept point requirements. It is well suited for use in both analog and digital wireless communication infrastructure and subscriber equipment including 3G, cellular, PCS, fixed wireless, and pager systems.

The matte tin finish on Sirenza's lead-free package utilizes a post annealing process to mitigate tin whisker formation and is RoHS compliant per EU Directive 2002/95. This package is also manufactured with green molding compounds that contain no antimony trioxide nor halogenated fire retardants.

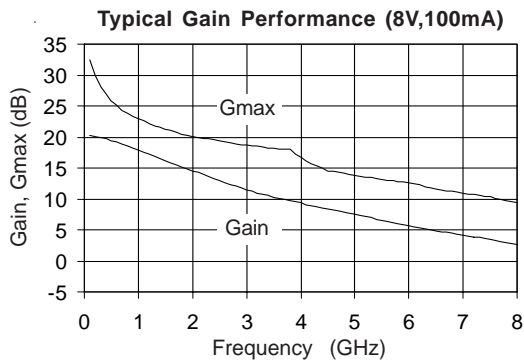

SHF-0189

SHF-0189Z RoHS Compliant & Green Package

0.05 - 6 GHz, 0.5 Watt GaAs HFET



Product Features

- Now available in Lead Free, RoHS Compliant, & Green Packaging
- High Linearity Performance at 1.96 GHz
 - +27 dBm P1dB
 - +40 dBm Output IP3
 - +16.5 dB Gain
- High Drain Efficiency
- See App Note AN-031 for circuit details

Applications

- Analog and Digital Wireless Systems
- 3G, Cellular, PCS
- Fixed Wireless, Pager Systems

Symbol	Device Characteristics	Test Conditions, 25°C $V_{DS} = 8V, I_{DQ} = 100mA$ (unless otherwise noted)	Test Frequency	Units	Min	Typ	Max
G _{max}	Maximum Available Gain	$Z_S = Z_S^*, Z_L = Z_L^*$	0.90 GHz 1.96 GHz	dB	-	23.3 20.1	-
S ₂₁	Insertion Gain ^[1]	$Z_S = Z_L = 50 \text{ Ohms}$	0.90 GHz 1.96 GHz	dB	16.6	18.4 14.7	20.2
Gain	Power Gain ^[2]	Application Circuit	0.90 GHz 1.96 GHz	dBm	-	18.6 16.7	-
OIP ₃	Output Third Order Intercept Point ^[2]	Application Circuit	0.90 GHz 1.96 GHz	dBm	-	40 40	-
P _{1dB}	Output 1dB Compression Point ^[2]	Application Circuit	0.90 GHz 1.96 GHz	dBm	-	27.2 27.5	-
NF	Noise Figure	Application Circuit	1.96 GHz	dB	-	3.2	-
I _{DSS}	Saturated Drain Current	$V_{DS} = V_{DSP}, V_{GS} = 0V$		mA	204	294	384
g _m	Transconductance	$V_{DS} = V_{DSP}, V_{GS} = -0.25V$		mS	144	198	252
V _p	Pinch-Off Voltage ^[1]	$V_{DS} = 2.0V, I_{DS} = 0.6mA$		V	-3.0	-1.9	-1.0
BV _{GS}	Gate-Source Breakdown Voltage ^[1]	$I_{GS} = 1.2mA, \text{drain open}$		V	-	-1.7	-1.5
BV _{GD}	Gate-Drain Breakdown Voltage ^[1]	$I_{GD} = 1.2mA, V_{GS} = -5.0V$		V	-	-2.2	-1.7
R _{th}	Thermal Resistance	junction-to-lead		°C/W	-	80	-
V _{DS}	Operating Voltage ^[3]	drain-source		V	-	-	8.0
I _{DQ}	Operating Current ^[3]	drain-source, quiescent		mA	-	-	160
P _{DISS}	Power Dissipation ^[3]			W	-	-	0.8

[1] 100% tested - Insertion gain tested using a 50 ohm contact board (no matching circuitry) during final production test.

[2] Sample tested - Samples pulled from each wafer/package lot. Sample test specifications are based on statistical data from sample test measurements. The test fixture is an engineering application circuit board. The application circuit was designed for the optimum combination of linearity, P1dB, and VSWR.

[3] Maximum recommended power dissipation is specified to maintain $T_j < 150°C$ at $T_c = 85°C$. $V_{DS} * I_{DQ} < 0.8W$ is recommended for continuous reliable operation.

The information provided herein is believed to be reliable at press time. Sirenza Microdevices assumes no responsibility for inaccuracies or omissions.

Sirenza Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Sirenza Microdevices does not authorize or warrant any Sirenza Microdevices product for use in life-support devices and/or systems. Copyright 2003 Sirenza Microdevices, Inc. All worldwide rights reserved.

Absolute Maximum Ratings

MTTF is inversely proportional to the device junction temperature. For junction temperature and MTTF considerations the bias condition should also satisfy the following expression:

$$P_{DC} < (T_J - T_L) / R_{TH}$$

where:

$$P_{DC} = I_{DS} * V_{DS} \text{ (W)}$$

$$T_J = \text{Junction Temperature } (^\circ\text{C})$$


$$T_L = \text{Lead Temperature (pin 4) } (^\circ\text{C})$$

$$R_{TH} = \text{Thermal Resistance } (^\circ\text{C/W})$$

MTTF @ $T_J=150\text{C}$ exceeds 1E7 hours

Parameter	Symbol	Value	Unit
Drain Current	I_{DS}	200	mA
Forward Gate Current	I_{GSF}	1.2	mA
Reverse Gate Current	I_{GSR}	1.2	mA
Drain-to-Source Voltage	V_{DS}	+9.0	V
Gate-to-Source Voltage	V_{GS}	<-5 or >0	V
RF Input Power	P_{IN}	200	mW
Operating Lead Temperature	T_L	See Graph	°C
Storage Temperature Range	T_{stor}	-40 to +150	°C
Power Dissipation	P_{DISS}	See Graph	W
Channel Temperature	T_J	+165	°C

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page 1.

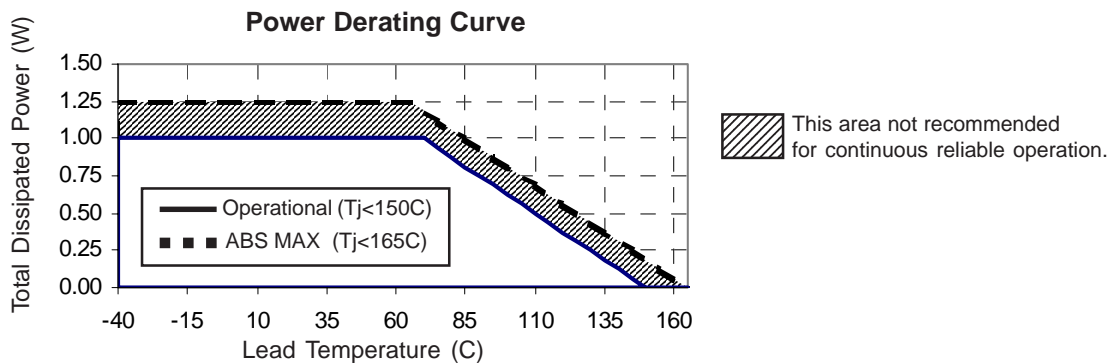




Typical Performance - Engineering Application Circuits (See App Note AN-031)

Freq (MHz)	V_{DS} (V)	I_{DQ} (mA)	P1dB (dBm)	OIP3* (dBm)	Gain (dB)	S11 (dB)	S22 (dB)	NF (dB)
900	8	100	27.2	40	18.6	-25	-13	4.7
1960	8	100	27.6	40	16.7	-20	-8	3.2
2140	8	100	27.5	40	15.2	-24	-14	3.8
2450	8	100	27.3	40	15.2	-16	-14	3.1


* $P_{OUT} = +15\text{dBm}$ per tone, 1MHz tone spacing

Data above represents typical performance of the application circuits noted in Application Note AN-031. Refer to the application note for additional RF data, PCB layouts, and BOMs for each application circuit. The application note also includes biasing instructions and other key issues to be considered. For the latest application notes please visit our site at www.sirenza.com or call your local sales representative.

De-embedded S-Parameters ($Z_s=Z_L=50\ \Omega$, $V_{DS}=8V$, $I_{DS}=100mA$, $25^\circ C$)

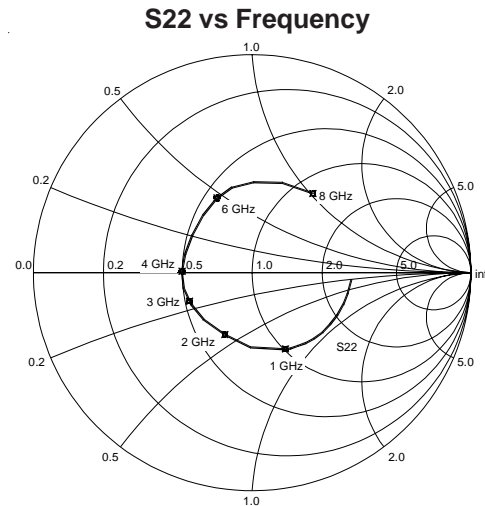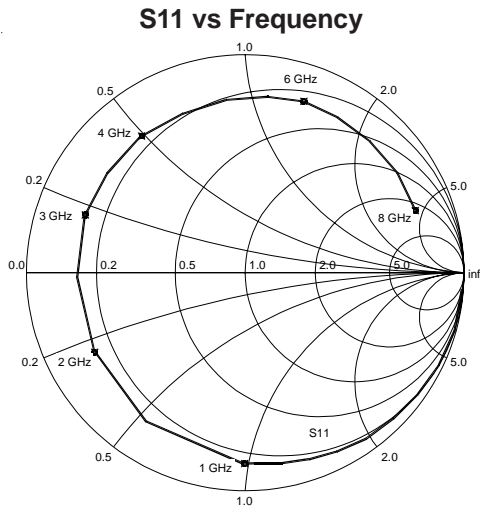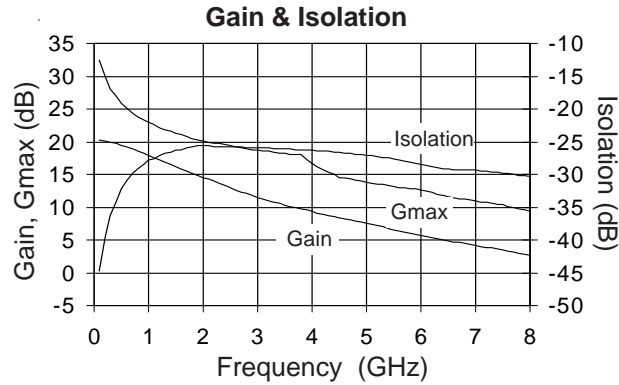

Note: S-parameters are de-embedded to the device leads with $Z_s=Z_L=50\ \Omega$. The data represents typical performance of the device. De-embedded s-parameters can be downloaded from our website (www.sirenza.com).

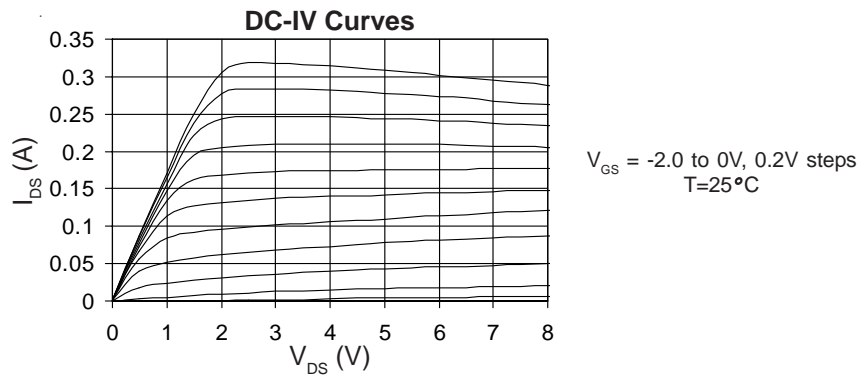

Pin Description


Pin #	Function	Description
1	Gate	RF Input
2	Source	Connection to ground. Use via holes to reduce lead inductance. Place vias as close to ground leads as possible.
3	Drain	RF Output
4	Source	Same as Pin 2

Mounting and Thermal Considerations

It is very important that adequate heat sinking be provided to minimize the device junction temperature. The following items should be implemented to maximize MTTF and RF performance.

1. Multiple solder-filled vias are required directly below the ground tab (pin 4). [CRITICAL]
2. Incorporate a large ground pad area with multiple plated-through vias around pin 4 of the device. [CRITICAL]
3. Use two point board seating to lower the thermal resistance between the PCB and mounting plate. Place machine screws as close to the ground tab (pin 4) as possible. [RECOMMENDED]
4. Use 2 ounce copper to improve the PCB's heat spreading capability. [RECOMMENDED]

Recommended Mounting Configuration for Optimum RF and Thermal Performance

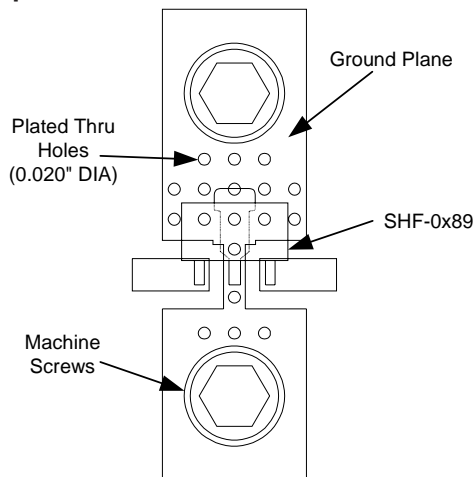


Part Number Ordering Information

Part Number	Reel Size	Devices/Reel
SHF-0189	7"	1000
SHF-0189Z	7"	1000


Part Symbolization

The part will be symbolized with the "H1" designator and a dot signifying pin 1 on the top surface of the package.

Package Dimensions

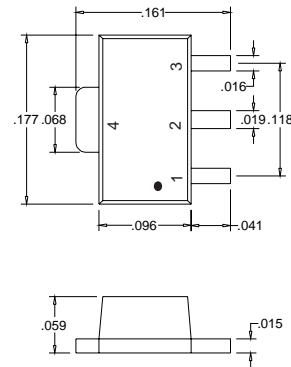

DIMENSIONS ARE IN INCHES

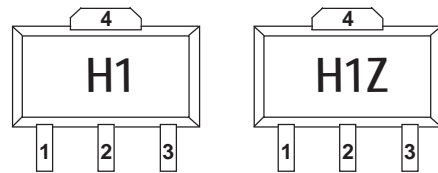

Caution: ESD sensitive
Appropriate precautions in handling, packaging and testing devices must be observed.