

74LS640, 74LS640-1
Transceiver

Inverting Octal Bus Transceiver (3-State)
Product Specification

Logic Products

FEATURES

- Octal bidirectional bus interface
- Inverting 3-State buffer outputs
- PNP inputs for reduced loading
- Hysteresis on all Data inputs
- 48mA sink capability ('LS640-1)

DESCRIPTION

The 'LS640 is an octal transceiver featuring inverting 3-State bus compatible outputs in both send and receive directions. The outputs are all capable of sinking 24mA and sourcing up to 15mA, producing very good capacitive drive characteristics. In addition, the 74LS640-1 features a 48mA sink current capability. The device features a Chip Enable (CE) input for easy cascading and a Send/Receive (S/R) input for direction control. All Data inputs have hysteresis built in to minimize ac noise effects.

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74LS640 & -1	7ns	58mA

ORDERING CODE

PACKAGES	COMMERCIAL RANGE $V_{CC} = 5V \pm 5\%$; $T_A = 0^{\circ}C$ to $+70^{\circ}C$
Plastic DIP	N74LS640N N74LS640-1N
Plastic SOL-20	N74LS640D

NOTE:

For information regarding devices processed to Military Specifications, see the Signetics Military Products Data Manual.

INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	74LS & -1
All	Inputs	1LSul
All	Outputs	30LSul

NOTE:


A 74LS unit load (LSul) is $20\mu A$ I_{IH} and $-0.4mA$ I_{IL} .

5


PIN CONFIGURATION

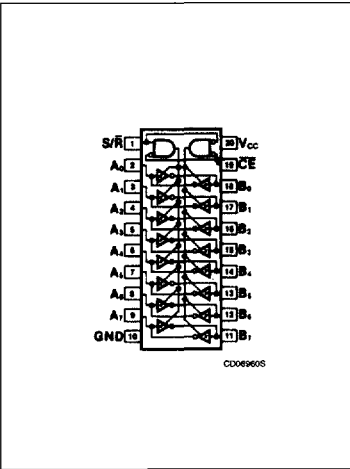

LOGIC SYMBOL

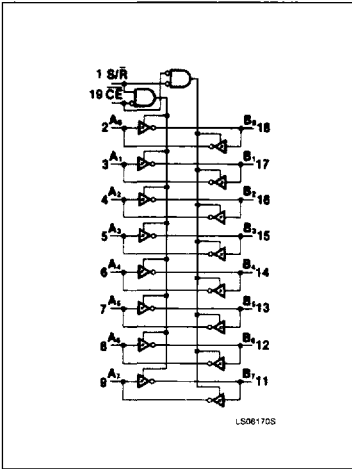

LOGIC SYMBOL (IEEE/IEC)

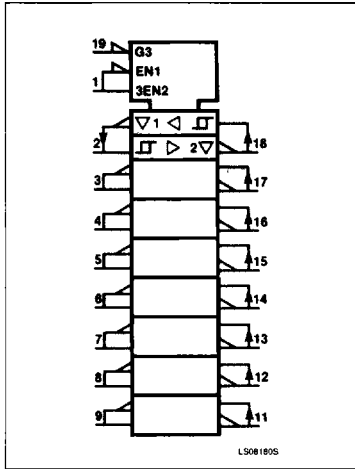

Transceiver

74LS640, 74LS640-1

FUNCTION TABLE

INPUTS		INPUTS/OUTPUTS	
$\overline{CE}$	$S/\overline{R}$	A_n	B_n
L	L	$A = \overline{B}$	Inputs
L	H	Inputs	$B = \overline{A}$
H	X	(Z)	(Z)

H = HIGH voltage level

L = LOW voltage level

X = Don't care

(Z) = HIGH impedance "off" state

ABSOLUTE MAXIMUM RATINGS (Over operating free-air temperature range unless otherwise noted.)

PARAMETER		74LS & -1	UNIT
V_{CC}	Supply voltage	7.0	V
V_{IN}	Input voltage	-0.5 to +7.0	V
I_{IN}	Input current	-30 to +1	mA
V_{OUT}	Voltage applied to output in HIGH output state	-0.5 to + V_{CC}	V
T_A	Operating free-air temperature range	0 to 70	°C

NOTE

 V_{IN} limited to 5.5V on A and B inputs only.

RECOMMENDED OPERATING CONDITIONS

PARAMETER		74LS & -1			UNIT
		Min	Nom	Max	
V_{CC}	Supply voltage	4.75	5.0	5.25	V
V_{IH}	HIGH-level input voltage	2.0			V
V_{IL}	LOW-level input voltage			+0.6	V
I_{IK}	Input clamp current			-18	mA
I_{OH}	HIGH-level output current			-15	mA
I_{OL}	LOW-level output current			24	mA
		74LS-1 only		48	mA
T_A	Operating free-air temperature	0		70	°C

Transceiver

74LS640, 74LS640-1

DC ELECTRICAL CHARACTERISTICS (Over recommended operating free-air temperature range unless otherwise noted.)

PARAMETER	TEST CONDITIONS ¹		74LS640			74LS640-1			UNIT
			Min	Typ ²	Max	Min	Typ ²	Max	
ΔV_T Hysteresis ($V_{T+} - V_{T-}$)	$V_{CC} = \text{MIN}$, A or B input		0.2	0.4		0.2	0.4		V
V_{OH} HIGH-level output voltage	$V_{CC} = \text{MIN}$, $V_{IH} = \text{MIN}$, $V_{IL} = \text{MAX}$	$I_{OH} = \text{MAX}$	2.0			2.0			V
		$I_{OH} = -3\text{mA}$	2.4	3.4		2.4	3.4		V
V_{OL} LOW-level output voltage	$V_{CC} = \text{MIN}$, $V_{IH} = \text{MIN}$, $V_{IL} = \text{MAX}$	$I_{OL} = 12\text{mA}$		0.25	0.4		0.25	0.4	V
		$I_{OL} = 24\text{mA}$ (74LS)		0.35	0.5		0.35	0.5	V
		$I_{OL} = 48\text{mA}$ (74LS-1)					0.4	0.5	V
V_{IK} Input clamp voltage	$V_{CC} = \text{MIN}$, $I_I = I_{IK}$				-1.5			-1.5	V
I_{OZH} Off-state output current, HIGH-level voltage applied	$V_{CC} = \text{MAX}$, $\overline{CE}$ input = 2.0V, $V_O = 2.7\text{V}$				20			20	μA
I_{OZL} Off-state output current, LOW-level voltage applied	$V_{CC} = \text{MAX}$, $\overline{CE}$ input = 2.0V, $V_O = 0.4\text{V}$				-400			-400	μA
I_I Input current at maximum input voltage	$V_{CC} = \text{MAX}$	$V_I = 5.5\text{V}$ A or B input			0.1			0.1	mA
		$V_I = 7.0\text{V}$ S/ $\overline{R}$ or $\overline{CE}$ input			0.1			0.1	mA
I_{IH} HIGH-level input current	$V_{CC} = \text{MAX}$, $V_I = 2.7\text{V}$				20			20	μA
I_{IL} LOW-level input current	$V_{CC} = \text{MAX}$, $V_I = 0.4\text{V}$				-0.4			-0.4	mA
I_{OS} Short-circuit output current ³	$V_{CC} = \text{MAX}$		-40		-130	-40		-130	mA
I_{CC} Supply current ⁴ (total)	$V_{CC} = \text{MAX}$	I_{CCH} Outputs HIGH		48	70		48	70	mA
		I_{CCL} Outputs LOW		62	90		62	90	mA
		I_{CCZ} Outputs OFF		64	95		64	95	mA

NOTES:


- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$.
- I_{OS} is tested with $V_{OUT} = +0.5\text{V}$ and $V_{CC} = V_{CC, \text{MAX}} + 0.5\text{V}$. Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.
- Measure I_{CC} with outputs open.

Transceiver

74LS640, 74LS640-1

AC ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, $V_{CC} = 5.0\text{V}$


PARAMETER		TEST CONDITIONS	74LS & -1		UNIT
			$C_L = 45\text{pF}$, $R_L = 667\Omega$		
			Min	Max	
t_{PLH} t_{PHL}	Propagation delay A input to B output	Waveform 1		10 15	ns
t_{PLH} t_{PHL}	Propagation delay B input to A output	Waveform 1		10 15	ns
t_{PZH}	Enable to HIGH $\overline{CE}$, $S/\overline{R}$ inputs to A output	Waveform 2		40	ns
t_{PZH}	Enable to HIGH $\overline{CE}$, $S/\overline{R}$ inputs to B output	Waveform 2		40	ns
t_{PZL}	Enable to LOW $\overline{CE}$, $S/\overline{R}$ inputs to A output	Waveform 3		40	ns
t_{PZL}	Enable to LOW $\overline{CE}$, $S/\overline{R}$ inputs to B output	Waveform 3		40	ns
t_{PHZ}	Disable from HIGH $\overline{CE}$, $S/\overline{R}$ inputs to A output	Waveform 2, $C_L = 5\text{pF}$		25	ns
t_{PHZ}	Disable from HIGH $\overline{CE}$, $S/\overline{R}$ inputs to B output	Waveform 2, $C_L = 5\text{pF}$		25	ns
t_{PLZ}	Disable from LOW $\overline{CE}$, $S/\overline{R}$ inputs to A output	Waveform 3, $C_L = 5\text{pF}$		25	ns
t_{PLZ}	Disable from LOW $\overline{CE}$, $S/\overline{R}$ inputs to B output	Waveform 3, $C_L = 5\text{pF}$		25	ns

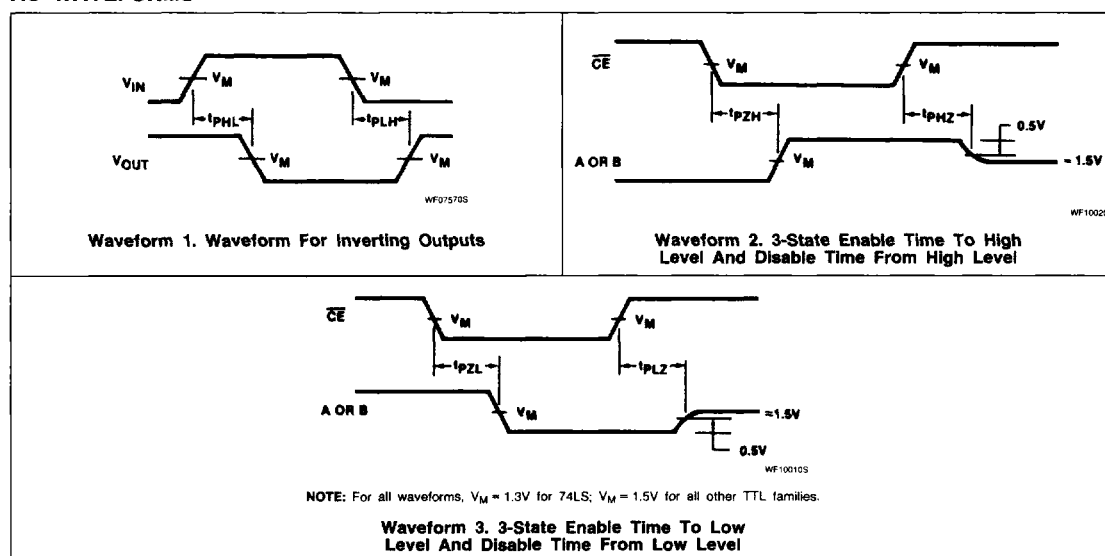AC WAVEFORMS


Transceiver

74LS640, 74LS640-1

TEST CIRCUITS AND WAVEFORMS

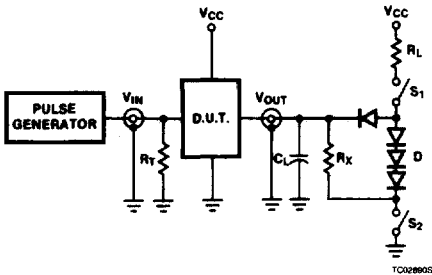

TC028805

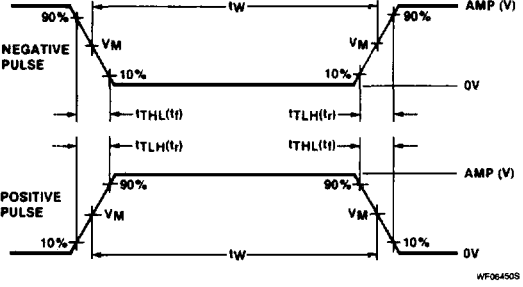

WF064505

$V_M = 1.3V$ for 74LS; $V_M = 1.5V$ for all other TTL families.

Test Circuit For 3-State Outputs

SWITCH POSITION

TEST	SWITCH 1	SWITCH 2
t_{PZH}	Open	Closed
t_{PZL}	Closed	Open
t_{PHZ}	Closed	Closed
t_{PLZ}	Closed	Closed

DEFINITIONS

R_L = Load resistor to V_{CC} ; see AC CHARACTERISTICS for value.

C_L = Load capacitance includes jig and probe capacitance; see AC CHARACTERISTICS for value.

R_T = Termination resistance should be equal to Z_{OUT} of Pulse Generators.

D = Diodes are 1N916, 1N3064, or equivalent.

$R_X = 1k\Omega$ for 74, 74S, $R_X = 5k\Omega$ for 74LS.

t_{TLH} , t_{THL} Values should be less than or equal to the table entries.

Input Pulse Definition

FAMILY	INPUT PULSE REQUIREMENTS				
	Amplitude	Rep. Rate	Pulse Width	t_{TLH}	t_{THL}
74	3.0V	1MHz	500ns	7ns	7ns
74LS	3.0V	1MHz	500ns	15ns	6ns
74S	3.0V	1MHz	500ns	2.5ns	2.5ns