


Single-In-Line-Memory-Module-Sockets

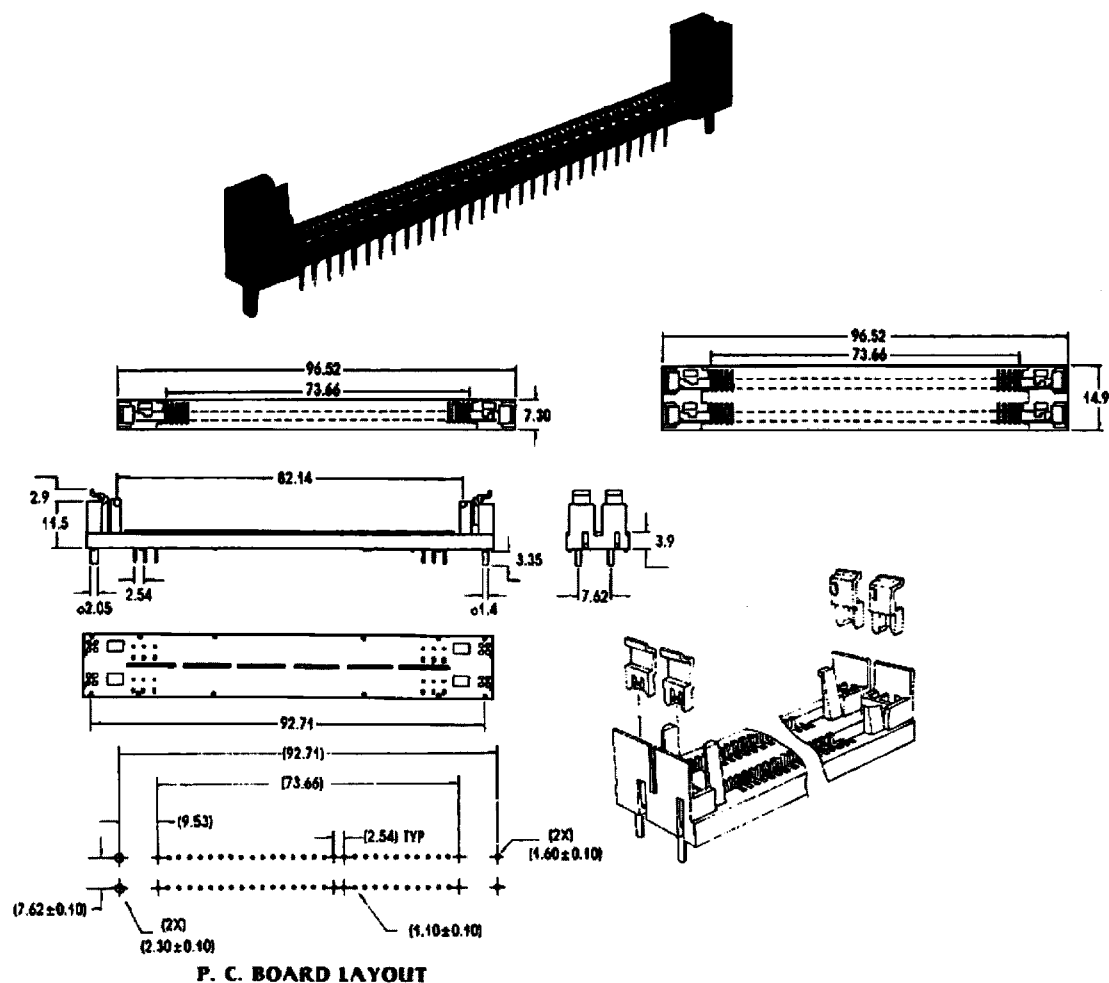

Part no.	No. of contacts	Locking
A-SM 30 V-TM	1 x 30	Metal Clips
A-SM 60 V-TM	2 x 30 = 60	Metal Clips
A-SM 30 V-TP	1 x 30	Plastic Clips
A-SM 60 V-TP	2 x 30 = 60	Plastic Clips

Contacts

CuSn, tinned

Insulators

LCP, UL 94-VO

Specifications

Vibration: MIL-STD-1344 A
 Durability: 30 mating cycles min.
 Contact force: 200 g min.
 Contact rating: 1 A
 Contact resistance: 30 m Ω max.
 Insulation resistance: 1000 M Ω