

A15

HIGH DENSITY DIP PLUG

PITCH: 1.27mm

MATERIAL

INSULATOR - NYLON 6T (UL 94V-0)
CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

15 MILLIOHM MAX.

INSULATION RESISTANCE





500 MEGOHM MIN.

DIELECTRIC VOLTAGE

500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

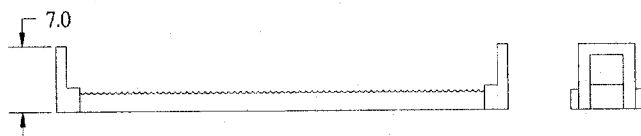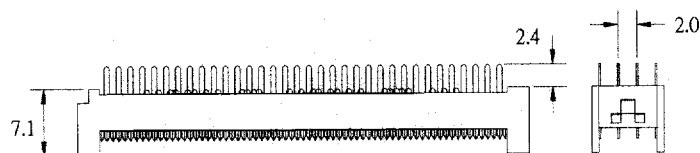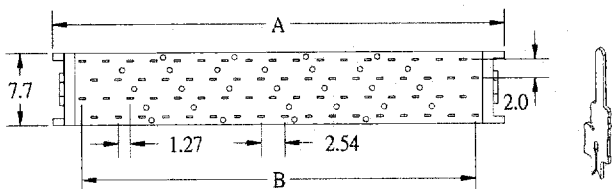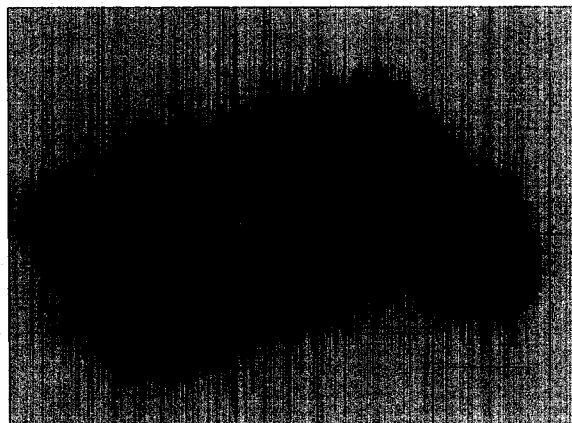

POSITION	A	B
30	23.83	17.78
50	36.53	30.48
68	47.96	41.91
80	55.58	49.53
100	68.28	62.23



1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
30 50 68 80 100	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK