

TABLE 2 CONTACTS

[XXX]S	"A" DIM.	"E" DIM.	"F" DIM.	"M" DIM.	"T" DIM.	"D" DIM.	PLATING	PCB HOLE
862	.585	.125	.335	Ø.018	.125	.050	10u" GOLD OVER 100u" MIN. NICKEL	.022±.003
858	.585	.125	.335	Ø.018	.125	.050	200u" TIN/LEAD OVER 100u" MIN. NICKEL	.022±.003
861	.460	.125	.210	Ø.018	.125	.050	10u" GOLD OVER 100u" MIN. NICKEL	.022±.003

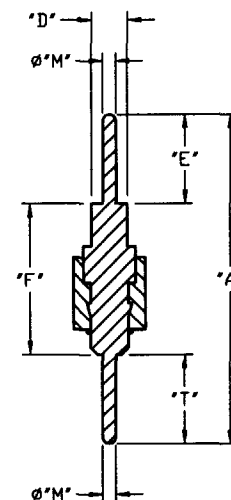
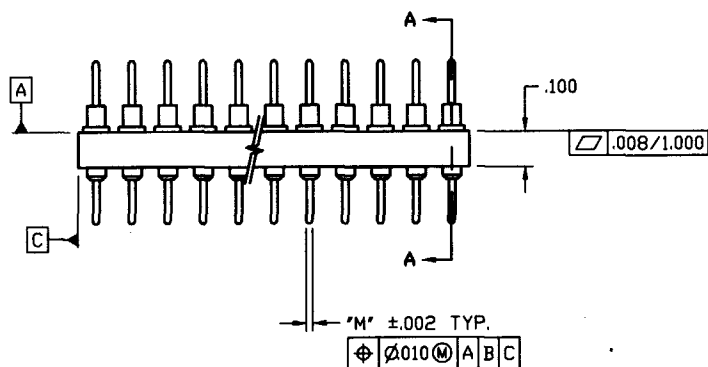
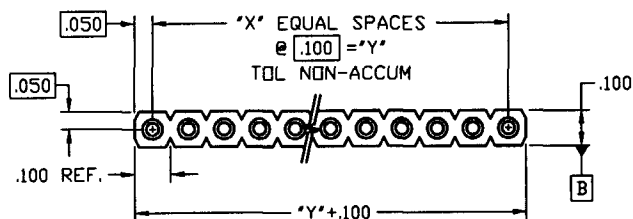
SECTION A-A
SCALE 4:1

TABLE 1

PART NUMBER		DIMENSION	
SST-1 X [D] - [XXX]S	"Y"	"X"	
01	0	0	
02	.100	1	
03	.200	2	
04	.300	3	
05	.400	4	
06	.500	5	
07	.600	6	
08	.700	7	
09	.800	8	
10	.900	9	
11	1.000	10	
12	1.100	11	
13	1.200	12	
14	1.300	13	
15	1.400	14	
16	1.500	15	
17	1.600	16	
18	1.700	17	
19	1.800	18	
20	1.900	19	
21	2.000	20	
22	2.100	21	
23	2.200	22	
24	2.300	23	
25	2.400	24	
26	2.500	25	
27	2.600	26	
28	2.700	27	
29	2.800	28	
30	2.900	29	
31	3.000	30	
32	3.100	31	

NOTES:

- NUMBER OF CONTACTS PER ROW (01 TO 32).
- INSULATOR MATERIAL:
GLASS REINFORCED POLYPHENYLENE SULFIDE (PPS)
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
- CONTACT PLATING:
TIN/LEAD PER MIL-P-81728 TYPE 1,
NICKEL PER QQ-N-290.
GOLD PER MIL-G-45204, TYPE 1, GRADE C.

PART NUMBER (SEE TABLES)
SST-1 X [D] - [XXX]S

FCI Electronics www.fciconnect.com	
title SINGLE ROW SIP HEADERS	
product family SIP	code -
size A	dwg no 58903
sheet 1 of 1	

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	
ltr	ecn no	dr	date	linear	.XX ±.01	projection	
A	V00765	DLW	3/10/00		.XXX ±.005		
				angles	.XXXX ±.0020		
					0° ±2°		
				dr	D. WOLFORD 3/10/00	INCH	
				enrg	A. VASBINDER 3/10/00	scale	
				chr	A. VASBINDER 3/10/00	2:1	
				appd	A. VASBINDER 3/10/00		
sheet index	revision	A					
	sheet	1					

cage code
22526