

3.2mm SQUARE ISOLATOR

MODEL ESI-3EAR 1.880 G 01 - T

(1) (2) (3) (4) (5)

(1) Series ESI-3EAR ; 1.6 mm Height

(2) Center Frequency

(3) G ; GHz

(4) Control No.

(5) T ; Taping
Blank ; Bulk

Specification


Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. (IN) Max.	V.S.W.R. (OUT) Max.	Attenuation		Handling Power Max. (W)	Reflection Power Max. (W)
					at 2f Min. (dB)	at 3f Min. (dB)		
1.850-1.910	[0.50] 0.60	13	1.50	1.50	15	15	2.5	0.6

Operating Temperature(deg.C) ; -35 to +85

[]---Room temperature(deg.C) ; +20 to +30

Impedance ; 50 ohms Typ.

Shape & Size

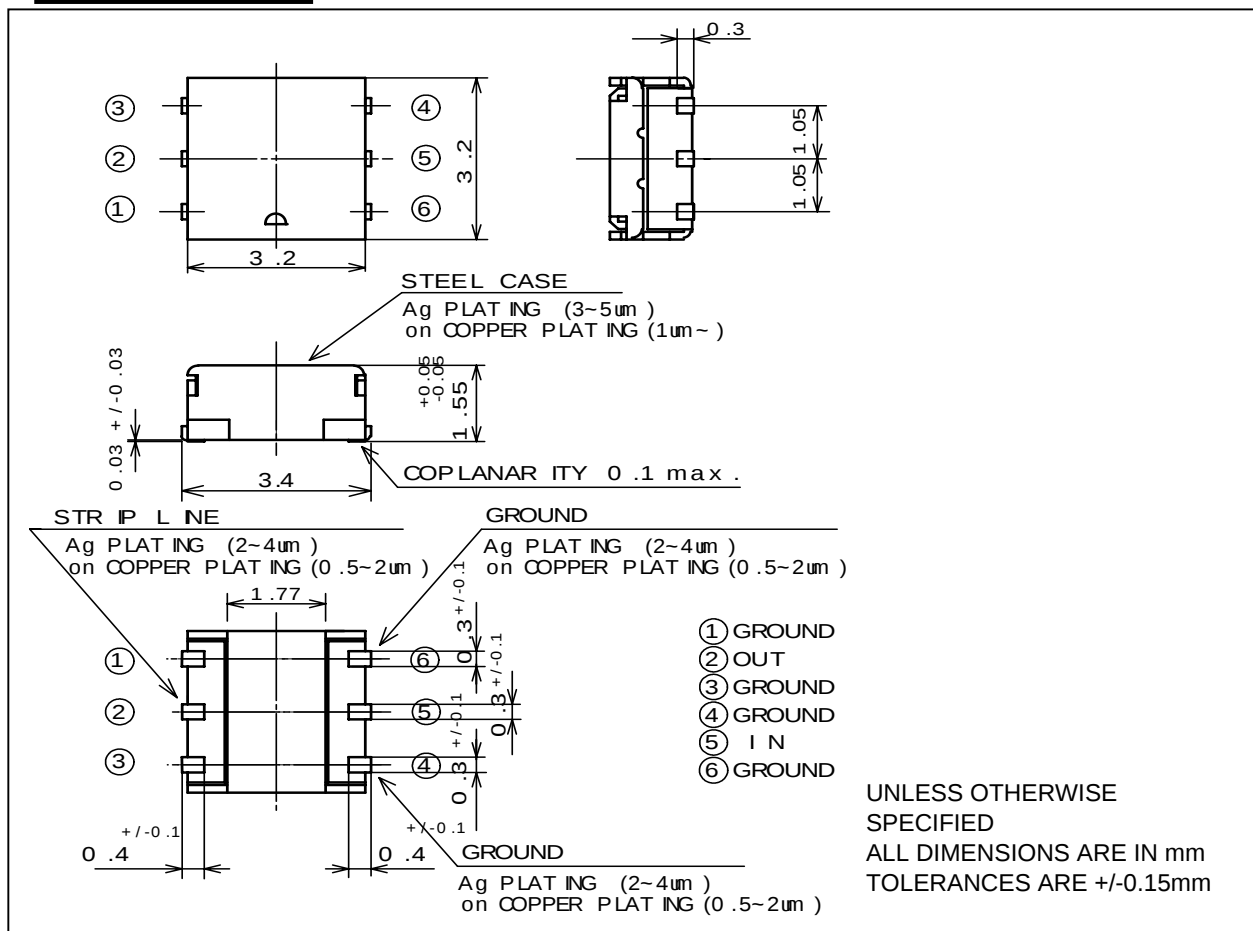

TAE889-4