


(Single Row, Straight & Right Angle)

2272 Series


SPECIFICATIONS

1. For low profile application 5.7mm high.
2. Accepts 0.64mm square pin .
3. Tuning-fork type contacts designed for low cost.
4. Mate with pin header such as 2201 & 2204S series.

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	Polyester, UL 94V-0
	©Standard: P.B.T

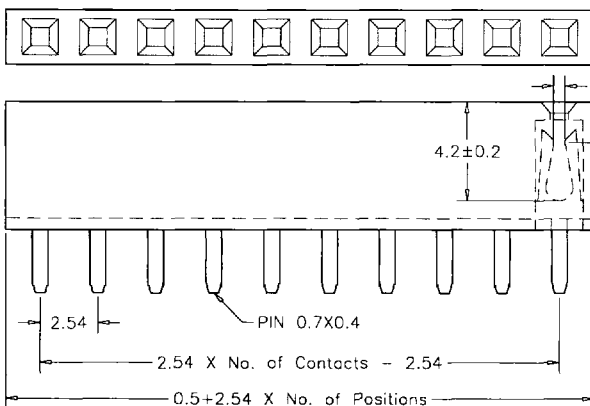

Example: 2212-34-S-02-3.2

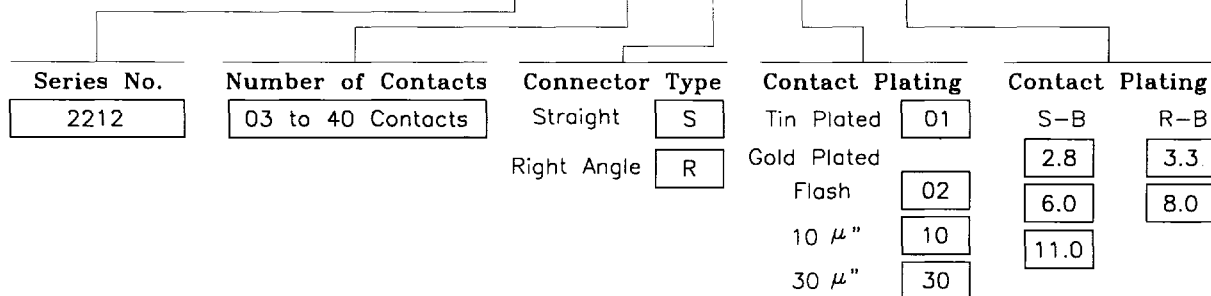

SINGATRON U.S.A. Tel: (909)464-1883 Fax: (909)464-1884 Email: sales@singatron.com