

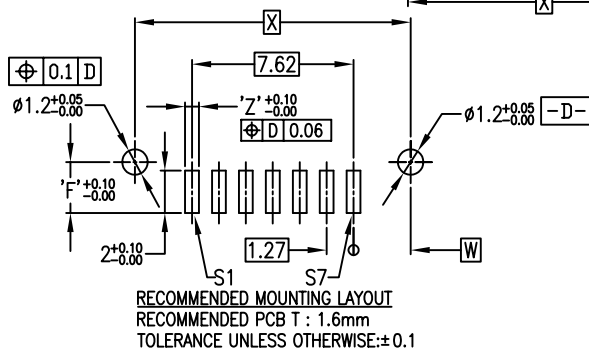
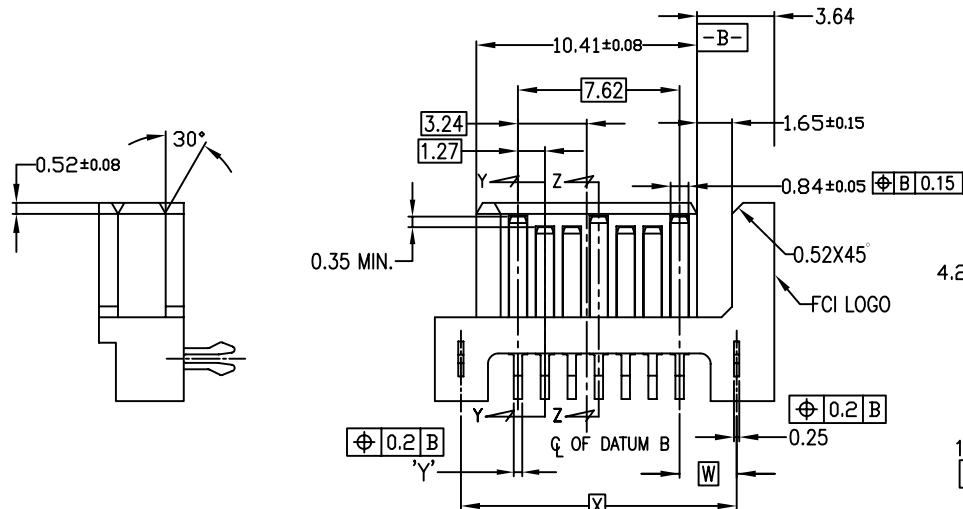


PRODUCT NO.	REMARKS	DIM 'W'	DIM 'X'	DIM 'Y'	DIM 'Z'	DIM 'E'	DIM 'F'
59335-001	—	2,69	13,00	0,40	0,65	1,95	2,40
59335-001LF	LEADFREE (3b) & (5)						
59335-011	—	2,56	12,74	0,40	0,65	0,95	3,36
59335-011LF	LEADFREE (3b) & (5)						

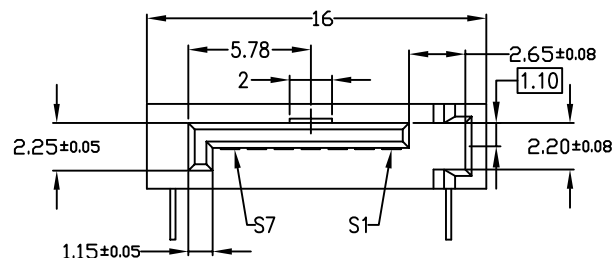

NOTE

1. THIS PRODUCT MEETS THE SATA SPEC REV.1.0a
2. MATERIAL
 - i) HOUSING : HIGH TEMPERATURE THERMOPLASTIC UL94V-0
 - ii) TERMINAL : COPPER ALLOY
 - iii) HOLD DOWN : COPPER ALLOY
- 3a. FINISH P/N : 59335-0X1
 - i) TERMINAL : Au PLATING AT CONTACT POINT
Sn-Pb PLATING AT SOLDER TAIL WITH NICKEL UNDERPLATE
 - ii) HOLD DOWN : Sn-Pb PLATING
- 3b. LEADFREE FINISH P/N : 59335-0X1LF
 - i) TERMINAL : Au PLATING AT CONTACT POINT
Sn PLATING AT SOLDER TAIL WITH NICKEL UNDERPLATE
 - ii) HOLD DOWN : Sn PLATING
4. THE HOUSING WILL WITHSTAND EXPOSURE TO 260-C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
5. FOR P/N: 59335-XXXLF, THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

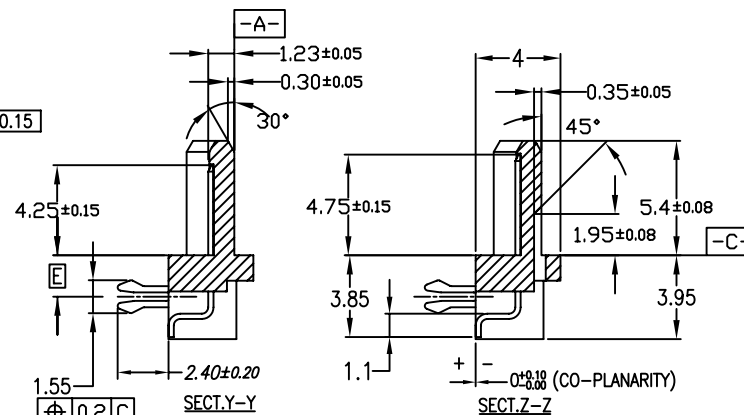

CONFIDENTIAL



www.fciconnect.com

S-ATA SIGNAL PLUG,
SMT HORIZ. TYPE ASS'Y

product family		SATA	code
size	dwg no		
			—

A	59335	sheet 1 of 1
---	-------	-----------------

cage	code			
	22526			