




PRODUCT NO.
71719-XYZLF




X	PLATING OPTION	⑨	NUMBER OF POSITIONS	Y	NUMBER OF HOUSING OPTIONS	Z
0 - 30 GXT	2 LOADED POS 4,5	4 LOADED POS 3,4,5,6	6 LOADED POS 2,3,4,5,6,7	8 FULLY LOADED	1 BLACK	2 LT. GREY
5 - 50 AU					3 NATURAL	

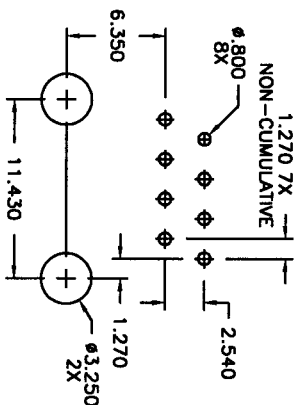

RECOMMENDED PCB LAYOUT

NOTES:

- 1 FOR VISUAL, MECHANICAL, AND ELECTRICAL REQUIREMENTS SEE PRODUCT SPEC. 110-015
- 2 HOUSING MAT'L: PBT 15% GLASS FILLED
- 3 CONDUCTOR MAT'L: #46 PHOS. BRONZE
PLATING: SEE TABLE: ALL OVER 100 * NICKEL
- 4 PACKAGING METHOD USE TUBE: SEE GES-14-164
- 5 MATALE PLUG: CONFORM TO FCC TYPE 623
- 6 PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
- 7 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 8 THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C. PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 0.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- 9 PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

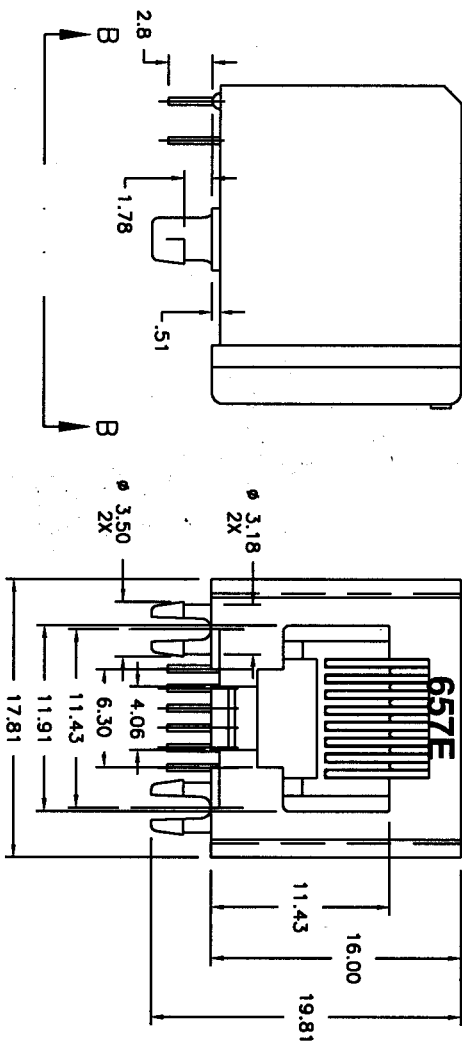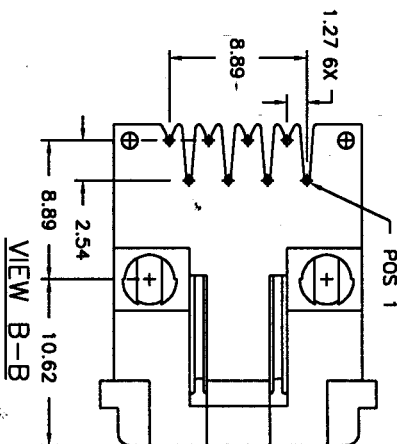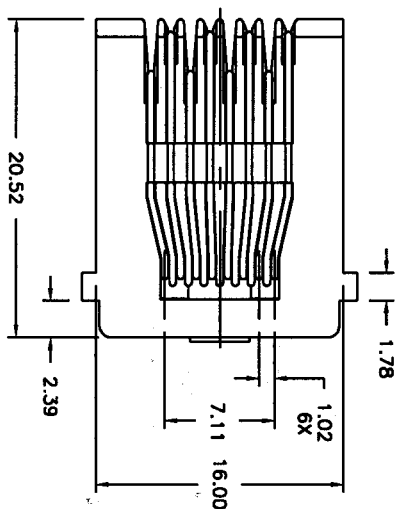

mat'l. code		SEE NOTES		tolerances unless otherwise specified		CUSTOMER		FCI	
lfr	ecn no.	dr	date	line	line	copy	projection	title	www.fci.com
C	V61179	LP	8/22/96		XXX.13			A-TMT ASSEMBLY	
D	V61352	LP	9/9/96		XXX.051			HOR 8 POSITION	
E	V61477	EPK	12/23/96	dr	0 ±Z			product family MODULAR JACK	
F	V61956	EPK	12/23/96	dr	5.00 ±0.01			code	
G	V12202	BRK	8/31/01	engr	YBECOPUSKT	8/31/95		size dwg no	
H	V20370	JRV	2/21/02	chr	YBECOPUSKT	3/21/96		code	
J	M05-0068	ERC	3/4/09	05 updat	YBECOPUSKT	3/21/96		sheet	
index	revision	sheet	1					1 of 1	