

Fig. 1

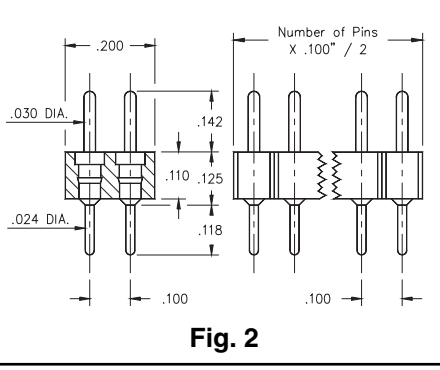


Fig. 2

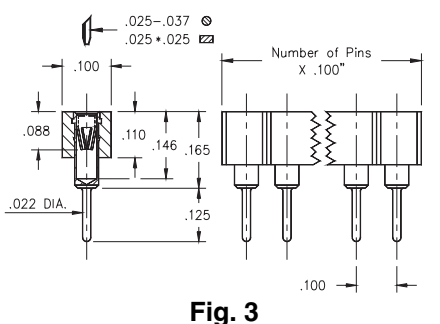


Fig. 3

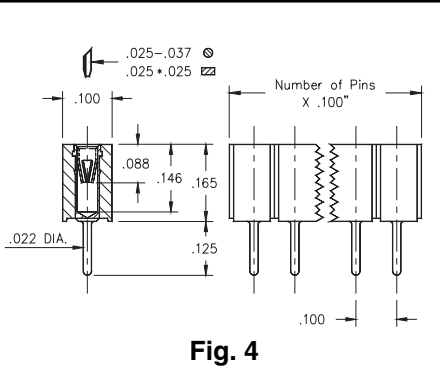


Fig. 4

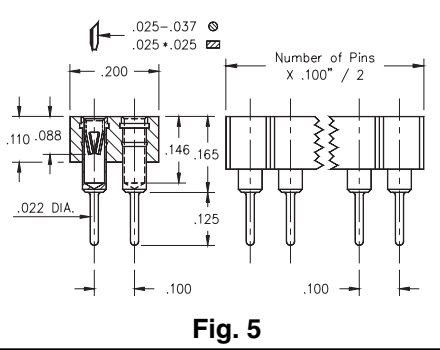


Fig. 5

- Series 800 and 802 single and double row pin headers use MM #5016 pins. See page 173 for details.
- Series 801 and 803 single and double row sockets use MM #1303 pins. See page 148 for details.
- Series 801 and 803 receptacles use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. Receptacles accept .030" diameter and .025" square pins. See page 211 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1	Single Row Low Profile Pin Header	800-XX-0 __ -10-002000
	Specify # of pins	01-64
Fig. 2	Double Row Low Profile Pin Header	802-XX-0 __ -10-002000
	Specify # of pins	02-64



XX= Plating Code See Below

For RoHS compliance select **◇** plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

Fig. 3	Single Row Low Profile Socket (short insulator)	801-XX-0 __ -10-002000
	Specify # of pins	01-64
Fig. 4	Single Row Low Profile Socket (long insulator)	801-XX-0 __ -10-012000
	Specify # of pins	01-36
Fig. 5	Double Row Low Profile Socket	803-XX-0 __ -10-002000
	Specify # of pins	02-72



XX= Plating Code See Below

For RoHS compliance select **◇** plating code.

SPECIFY PLATING CODE XX=	13◇	93	99	43◇	44◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn