



CATALOG NUMBER	A	BØ	C	"L" LENGTH	MOUNTING HOLE
A007-L43-01-TAB	FD	.164	.180	SEE CHART	FIG. 1
A007-L44-01-TAB	LD	.164	.180	SEE CHART	FIG. 1
A007-L45-01-TAB	SB	.164	.180	SEE CHART	FIG. 1
A007-L43-02-TAB	FD	.145	.140	SEE CHART	FIG. 2
A007-L44-02-TAB	LD	.145	.140	SEE CHART	FIG. 2
A007-L45-02-TAB	SB	.145	.140	SEE CHART	FIG. 2

TAB EQUALS "L" x 10³ IN.



LENGTH CHART
.030
.050
.070
.090
.145

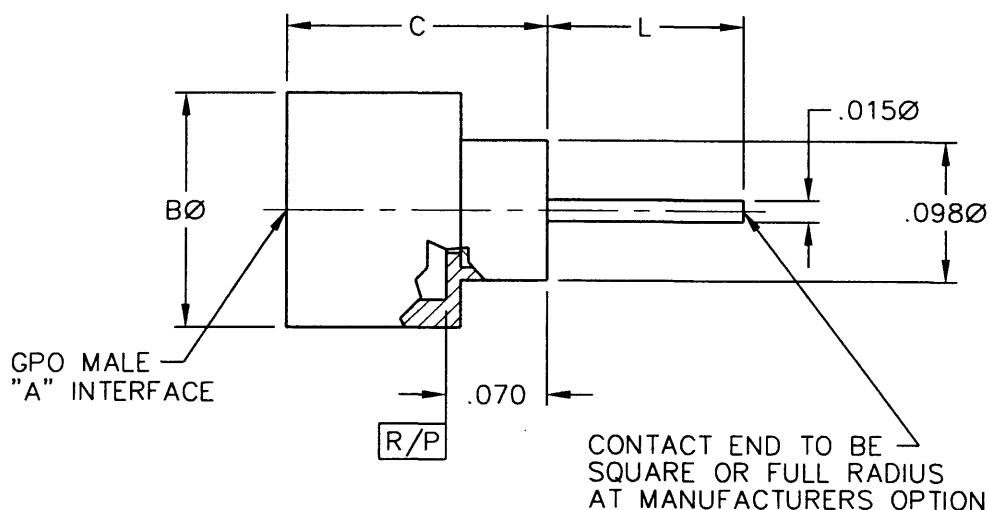

RECOMMENDED MOUNTING HOLES

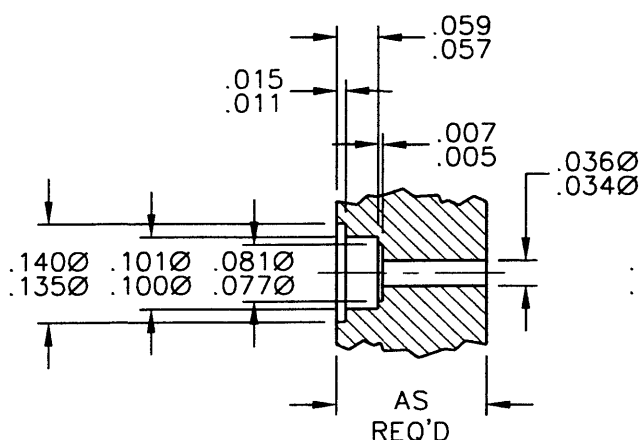


FIG. 1

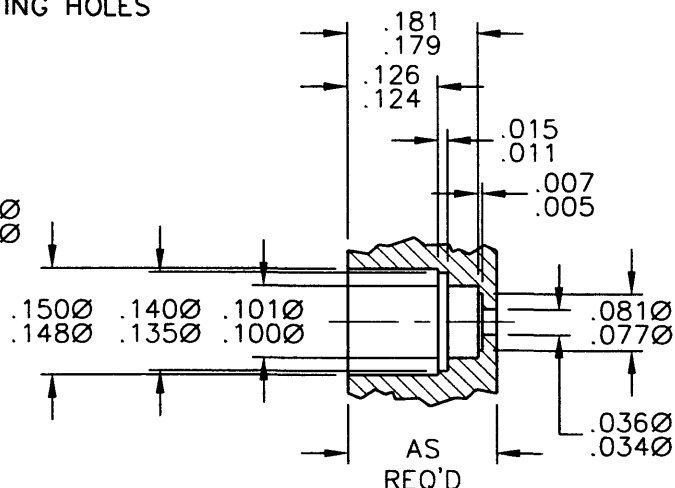


FIG. 2

GPO MALE SOLDER-IN
HERMETIC SHROUD

Corning Gilbert Inc.

CODE IDENT NO.: 82316


SERIES: A007-L

MATERIAL AND FINISH: CODE 04


ASSEMBLY PROC.: —

CATALOG NUMBER	A	BØ	C	"L" LENGTH(S)	MOUNTING HOLE
A007-L43-04-TAB	FD	.145	.120	SEE CHART	FIG. 1
A007-L44-04-TAB	LD	.145	.120	SEE CHART	FIG. 1
A007-L45-04-TAB	SB	.145	.120	SEE CHART	FIG. 1
A007-L43-03-TAB	FD	.164	.160	.030/.050/.075	FIG. 2
A007-L44-03-TAB	LD	.164	.160	.030/.050/.075	FIG. 2
A007-L45-03-TAB	SB	.164	.160	.030/.050/.075	FIG. 2

TAB EQUALS "L" x 10³ IN.



LENGTH CHART
.030
.050
.070
.090
.145

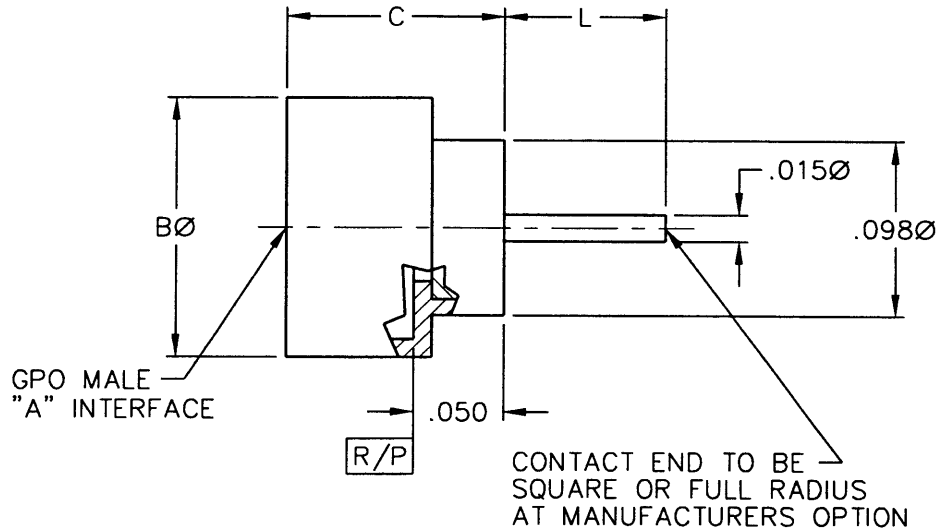

RECOMMENDED MOUNTING HOLES

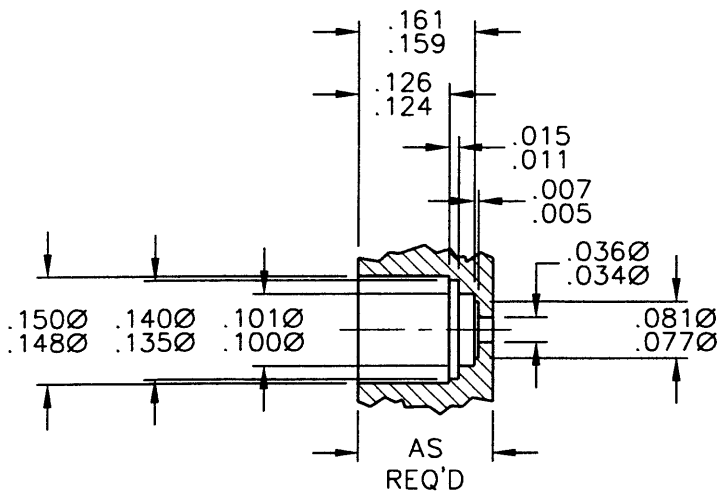


FIG. 1

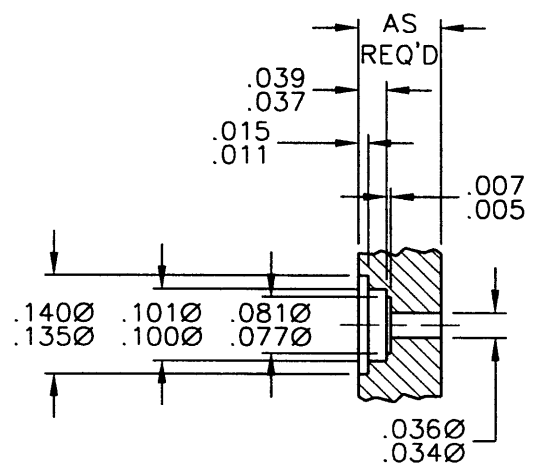


FIG. 2

GPO MALE SOLDER-IN
HERMETIC SHROUD

Corning Gilbert Inc.

CODE IDENT NO.: 82316

SERIES: A007-L

MATERIAL AND FINISH: CODE 04

ASSEMBLY PROC.: —