
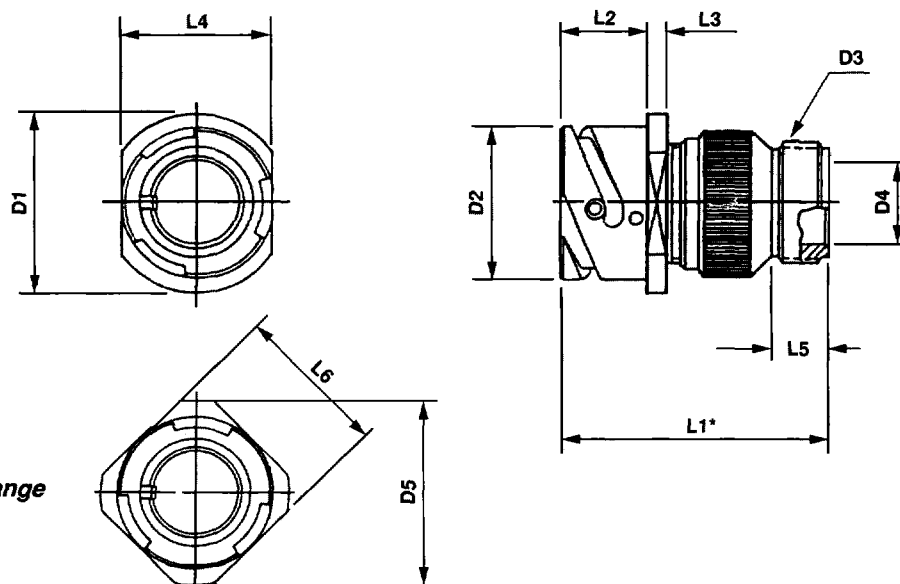


INLINE RECEPTACLE.

CIR 01A

Includes backshell for
accessory attachment.
Without wire sealing
grommet and cable clamp.
Non-environment proof.

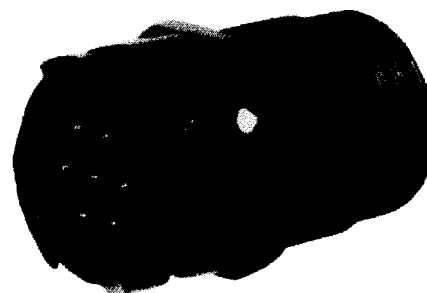

Alternate Flange
Geometry

Dimension L1 will vary from the values indicated with escalating or de-escalating backshells
and some special insert configurations. Verify with our Customer Service department.

DIMENSIONS ARE IN MM.

	D1	D2	D3	D4	D5	L1*	L2	L3	L4	L5	L6
Shell		+0.0					+0.4				
Size	MAX.	-0.15	THREAD IN INCHES	MIN.	MAX.	MAX.	-0.0	±0.2	±0.2	MIN.	±0.2
10SL	22.4	18.2	5/8-24 UNEF-2A	10.4	25.2	43	14.2	2.8	18.2	9.5	20.6
14S	28.8	24.6	3/4-20 UNEF-2A	13.2	29.8	47	14.2	3.2	24.6	9.5	25.4
16S	31.6	27.4	7/8-20 UNEF-2A	16.2	32.3	47	14.2	3.2	27.4	9.5	28.6
16	31.6	27.4	7/8-20 UNEF-2A	16.2	32.3	58	19	3.2	27.4	9.5	28.6
18	35.0	30.8	1-20 UNEF-2A	19.2	34.8	58	19	4	30.8	9.5	31.7
20	38.1	34.2	1 3/16-18 UNEF-2A	22	37.8	58	19	4	34.2	9.5	34.9
22	41.1	37.4	1 3/16-18 UNEF-2A	24.5	41.1	59	19	4	37.4	9.5	38.1
24	44.6	40.9	1 7/16-18 UNEF-2A	27.8	44.6	61	20.6	4	40.9	9.5	41.3
28	50.9	46.7	1 7/16-18 UNEF-2A	31.2	50.9	67	20.6	4	46.7	9.5	47.6
32	57.1	53.4	1 3/4-18 UNS-2A	37.8	57.1	71	22.2	4	53.4	11	54
36	63.6	59.6	2-18 UNS-2A	45	63.6	71	22.2	4	59.6	11.8	60.6
40	69.7	65.5	2 1/4-16 UN-2A	51.2	70	86	22.2	4	65.5	11.8	66.5

CIR 01A