0.8 mm pitch connector


Right-angle SMT type female connector for PCB HDRA-ED136LFZGT()-()+

For PCB

Right-angle SMT

(RoHS)


ANSI/SFF8441



Configuration of product Part No.

$\underbrace{\text{HDRA- ED}}_{\tiny{\scriptsize{\scriptsize{0}}}} \underbrace{\text{136}}_{\tiny{\scriptsize{\scriptsize{0}}}} \underbrace{\text{LFZ}}_{\tiny{\scriptsize{\scriptsize{0}}}} \underbrace{\text{G}}_{\tiny{\scriptsize{\scriptsize{0}}}} \underbrace{\text{T}}_{\tiny{\scriptsize{\scriptsize{0}}}} \underbrace{\text{O}}_{\tiny{\tiny{\scriptsize{0}}}} - \underbrace{\text{O}}_{\tiny{\tiny{\scriptsize{0}}}} +$

- ① Series name
- 2 No. of contacts: 136
- ③ Type of contact
 - LFZ: Right-angle SMT type, female
- - G: 0.76 µm Gold plate
- **5** Ground lock pins with hold downs
- 6 Form of shell
 - Blank: Standard shell
 - A: Shell with flange for EMI
- ⑦ Lock screws
 - L: Provided
 - (Panel thickness: t = 1.12 mm or less)

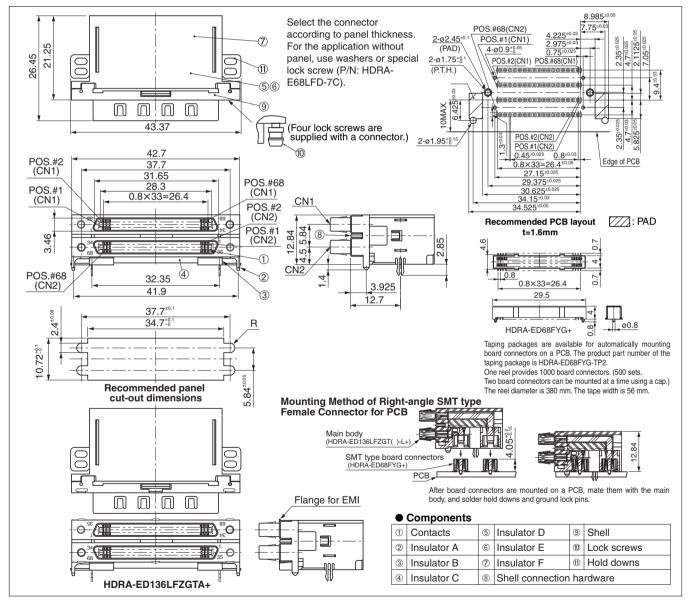

Mating connector: HDRA series IDC type male cable connector, or straddle SMT type male connector
