


- High temperature insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching.
- Chamfered contact entry allows for ease of IC insertion without bent leads.
- Uses M-M#1005 pin with #30 clip rated at 3 amps. See page 135 for pin details.

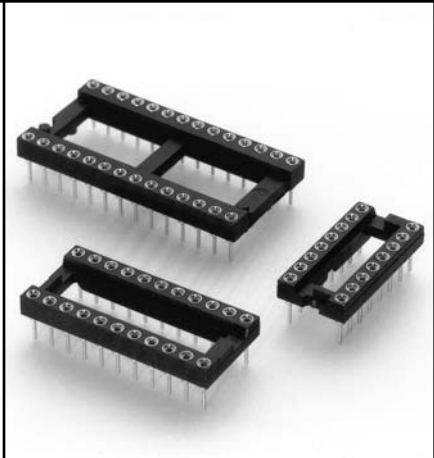

Total number of pins	Pin Spacing			Quantity per tube	Ordering Information
	A	B	C		

6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
24	1.2	0.3	0.4	16
22	1.1	0.4	0.5	18
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10

**XX= Plating Code
See Below**



- 110-XX-306-41-605000
- 110-XX-308-41-605000
- 110-XX-314-41-605000
- 110-XX-316-41-605000
- 110-XX-318-41-605000
- 110-XX-320-41-605000
- 110-XX-324-41-605000
- 110-XX-422-41-605000
- 110-XX-624-41-605000
- 110-XX-628-41-605000
- 110-XX-632-41-605000
- 110-XX-640-41-605000

SPECIFY PLATING CODE XX=	13◇	93	43◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	30μ" Au