



ASH-80 Series Pitch 8.25mm

Specifications



BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0), BLACK
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 16-22 STR.
 RATING: 15 AMPERES, 300 VAC
 INSULATION WITHSTANDS VOLTAGE AC 2000
 INSULATION RESISTANCE 500MΩ OR MORE AT DC 500V

MOUNTING END & BARRIER
 END ARE BOTH AVAILABLE


ASH-801

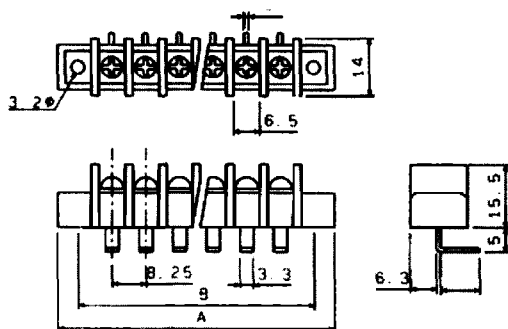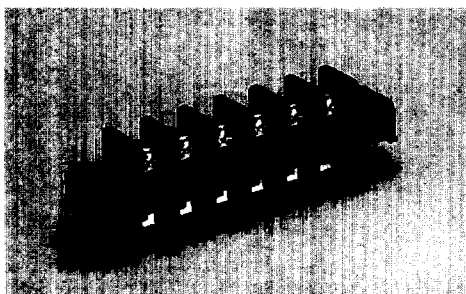



ASH-802

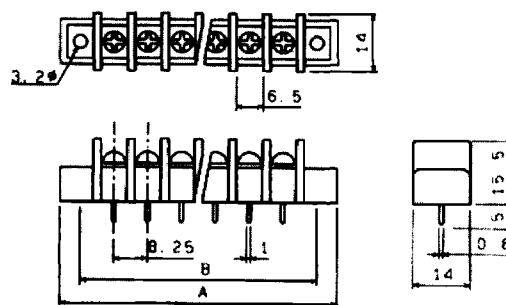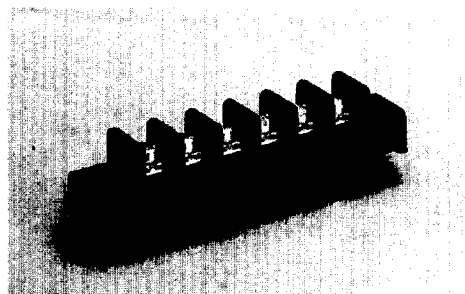

ASH-803


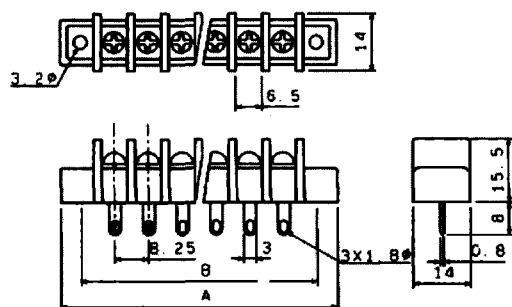


ASH-804

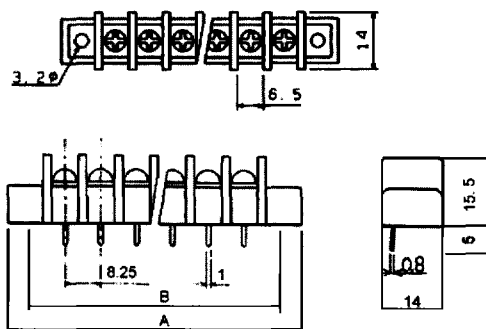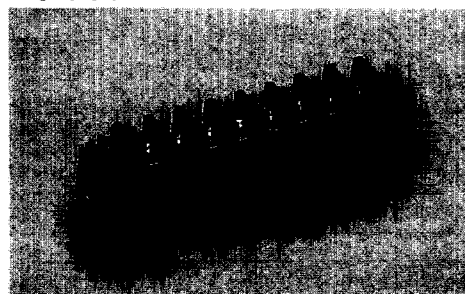

ASH-80 Series Continued....

ASH-805

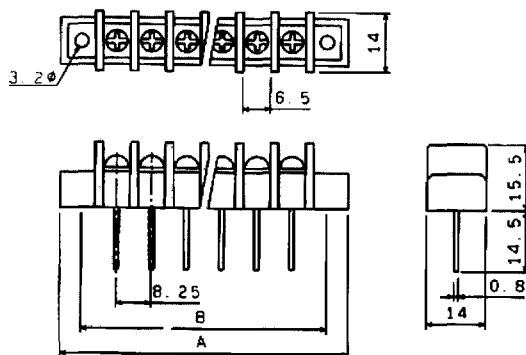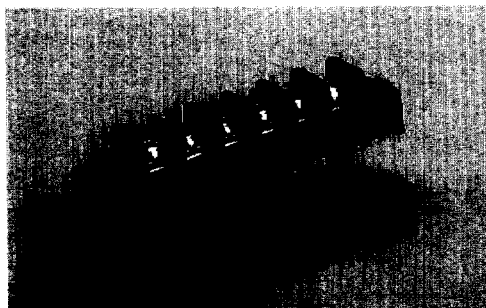

DIMENSION: $\pm 0.8\text{mm}$

Pole	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A	34	43	51	59	67	77	84	92	101	109	118	126	134	142	151	159
B	25	33	42	50	58	67	74	83	92	99	108.5	116	124	133	141	149

Pole	18	19	20	21	22	23	24	25	26	27	28	29	30
A	167	175	183	192	200	208	217	224	233	242	250	258	267
B	157	166	174	182	190	198	207	215	223	232	240	248	251