


Couplers

Directional Couplers • Octave Bandwidth

SMA Miniature High Performance

- Full Octave Frequency Band Performance
- Low VSWR - High Directivity
- Small Lightweight
- Meets Mil-E-5400 and Mil-E16400

Midwest Microwave's SMA miniature series of high performance directional couplers are small, lightweight, ruggedly constructed stripline units that possess inherently low insertion loss and VSWR with high directivity. Units are available in octave frequency bandwidths covering the entire range of 0.5-18.0 GHz.

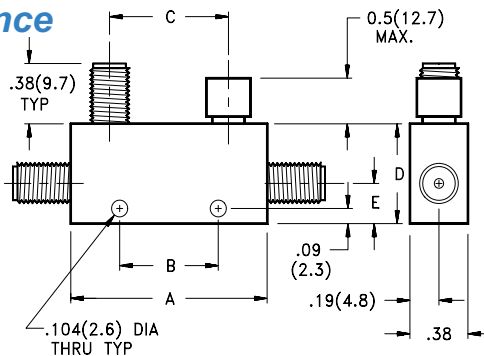

ELECTRICAL SPECIFICATIONS


FREQUENCY RANGE (GHz)	CASE STYLE	MODEL NUMBER	COUPLING (dB) (incl Freq Sensitivity)	FREQUENCY SENSITIVITY	INSERTION LOSS (dB) max	DIRECTIVITY (dB) min	VSWR max	Input Avg (W)	POWER Refl Avg (W)	Peak (kW) (W)
0.5 - 1.0	4	CPL-5210-06-SMA-79	6 + 1.0	+ 0.60	0.15	25	1.10	50	4	4
	4	CPL-5210-10-SMA-79	10 + 1.0	+ 0.75	0.15	25	1.10	50	10	4
	4	CPL-5210-20-SMA-79	20 + 1.0	+ 0.75	0.15	25	1.10	50	50	4
	4	CPL-5210-30-SMA-79	30 + 1.0	+ 0.75	0.15	25	1.10	50	50	4
1.0 - 2.0	3	CPL-5211-06-SMA-79	6 + 1.0	+ 0.60	0.20	25	1.15	50	4	4
	3	CPL-5211-10-SMA-79	10 + 1.0	+ 0.75	0.20	25	1.15	50	10	4
	3	CPL-5211-20-SMA-79	20 + 1.0	+ 0.75	0.20	25	1.15	50	50	4
	3	CPL-5211-30-SMA-79	30 + 1.0	+ 0.75	0.20	25	1.15	50	50	4
2.0 - 4.0	2	CPL-5212-06-SMA-79	6 + 1.0	+ 0.60	0.20	22	1.15	50	4	4
	2	CPL-5212-10-SMA-79	10 + 1.0	+ 0.75	0.20	22	1.15	50	10	4
	2	CPL-5212-20-SMA-79	20 + 1.0	+ 0.75	0.20	22	1.15	50	50	4
	2	CPL-5212-30-SMA-71	30 + 1.0	+ 0.75	0.20	22	1.15	50	50	4
2.6 - 5.2	1	CPL-5213-06-SMA-79	6 + 1.0	+ 0.60	0.25	20	1.25	50	4	4
	1	CPL-5213-10-SMA-79	10 + 1.0	+ 0.75	0.25	20	1.25	50	10	4
	1	CPL-5213-20-SMA-79	20 + 1.0	+ 0.75	0.25	20	1.25	50	50	4
	5	CPL-5213-30-SMA-79	30 + 1.0	+ 0.75	0.25	20	1.25	50	50	4
4.0 - 8.0	1	CPL-5214-6-SMA-79	6 + 1.0	+ 0.50	0.35	20	1.25	50	4	4
	1	CPL-5214-10-SMA-79	10 + 1.0	+ 0.50	0.35	20	1.25	50	10	4
	1	CPL-5214-20-SMA-79	20 + 1.0	+ 0.50	0.35	20	1.25	50	50	4
	5	CPL-5214-30-SMA-79	30 + 1.0	+ 0.50	0.35	20	1.25	50	50	4
7.0 - 12.4	1	CPL-5215-06-SMA-79	6 + 1.0	+ 0.40	0.50	17	1.35	50	4	4
	1	CPL-5215-10-SMA-79	10 + .75	+ 0.50	0.40	17	1.35	50	10	4
	1	CPL-5215-20-SMA-79	20 + .75	+ 0.50	0.30	17	1.35	50	50	4
	5	CPL-5215-30-SMA-79	30 + 1.0	+ 0.50	0.30	17	1.35	50	50	4
7.0 - 18.0	1	CPL-5216-06-SMA-79	6 + 1.0	+ 0.50	0.65	15	1.35	50	4	3
	1	CPL-5216-10-SMA-79	10 + 1.0	+ 0.50	0.50	15	1.40	50	10	3
	1	CPL-5216-20-SMA-79	20 + 1.0	+ 0.75	0.50	15	1.45	50	50	3
	5	CPL-5216-30-SMA-79	30 + 1.0	+ 0.75	0.50	15	1.45	50	50	3
12.4 - 18.0	1	CPL-5217-06-SMA-79	6 + 1.0	+ 0.40	0.65	15	1.35	50	4	2
	1	CPL-5217-10-SMA-79	10 + 1.0	+ 0.50	0.50	15	1.45	50	10	2
	1	CPL-5217-20-SMA-79	20 + 1.0	+ 0.75	0.50	15	1.45	50	50	2
	5	CPL-5217-30-SMA-79	30 + 1.0	+ 0.75	0.50	15	1.45	50	50	2

Note: TNC or Type N output connectors are available by substituting "TNC" or "NNN" for "SMA" in the Model Number. See next page for dimensions.

Ultra-Wideband Performance

- Full 0.5 - 18.0 GHz bandwidth units
- Low VSWR - High Directivity
- Rugged Stripline Construction
- Meets Mil-E-5400 and Mil-E16400

Midwest Microwave's SMA miniature series of Ultra-Wideband high performance directional couplers are small, lightweight, components that perform extremely well over multi-octave and Ultra-Wideband frequencies covering the entire range of 0.5 - 18.0 GHz. .

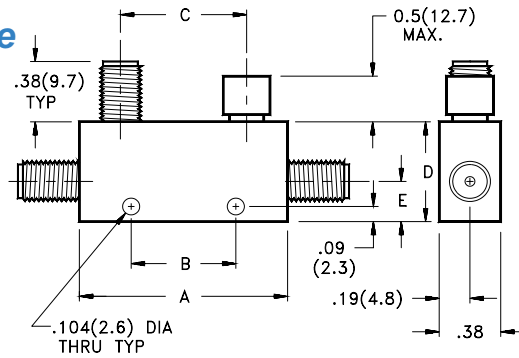

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHZ)	CASE STYLE	MODEL NUMBER	COUPLING (dB) (Incl Freq Sensitivity)	FREQUENCY SENSITIVITY	INSERTION LOSS (dB) max	DIRECTIVITY (dB) min	VSWR max	Input Avg (W)	POWER Refl Avg (W)	Peak (kW) (W)
0.5 - 2.0	6	CPL-5220-06-SMA-79	6 + 1.0	+ 0.50	0.40	22	1.20	50	10	4
	6	CPL-5220-10-SMA-79	10 + 1.0	+ 0.50	0.40	22	1.20	50	10	4
	6	CPL-5220-16-SMA-79	16 + 1.0	+ 0.50	0.40	22	1.20	50	40	4
	6	CPL-5220-20-SMA-79	20 + 1.0	+ 0.50	0.40	22	1.20	50	50	4
1.0 - 4.0	6	CPL-5221-06-SMA-79	6 + 1.0	+ 0.50	0.50	22	1.25	50	10	4
	6	CPL-5221-10-SMA-79	10 + 1.0	+ 0.50	0.50	22	1.25	50	10	4
	6	CPL-5221-16-SMA-79	16 + 1.0	+ 0.50	0.50	22	1.25	50	40	4
	6	CPL-5221-20-SMA-79	20 + 1.0	+ 0.50	0.50	22	1.25	50	50	4
2.0 - 8.0	7	CPL-5222-06-SMA-79	6 + 1.0	+ 0.50	0.60	20	1.25	50	10	4
	7	CPL-5222-10-SMA-79	10 + 1.0	+ 0.50	0.60	20	1.25	50	10	4
	7	CPL-5222-16-SMA-79	16 + 1.0	+ 0.50	0.60	20	1.25	50	40	4
	7	CPL-5222-20-SMA-79	20 + 1.0	+ 0.50	0.60	20	1.25	50	50	4
6.0 - 18.0	1	CPL-5226-06-SMA-79	6 + 1.0	+ 0.50	0.65	15	1.40	50	10	3
	1	CPL-5226-10-SMA-79	10 + 1.0	+ 0.50	0.60	15	1.40	50	10	3
	1	CPL-5226-16-SMA-79	16 + 1.0	+ 0.50	0.60	15	1.40	50	40	3
	1	CPL-5226-20-SMA-79	20 + 1.0	+ 0.50	0.60	15	1.40	50	50	3
0.5 - 18.0	6	CPL-5230-10-SMA-79	10* + 1.5	+ 1.00	0.80	15**	1.50	50	10	3
	6	CPL-5230-16-SMA-79	16* + 1.5	+ 1.00	0.80	15**	1.50	50	40	3
	6	CPL-5230-20-SMA-79	20* + 1.5	+ 1.00	0.80	15**	1.50	50	50	3
1.0 - 18.0	6	CPL-5231-10-SMA-79	10* + 1.0	+ 0.60	1.05	15**	1.50	50	10	3
	6	CPL-5231-16-SMA-79	16* + 1.0	+ 0.60	0.80	15**	1.50	50	40	3
	6	CPL-5231-20-SMA-79	20* + 1.0	+ 0.50	0.80	15**	1.50	50	50	3
2.0 - 18.0	7	CPL-5232-06-SMA-79	6* + 1.0	+ 0.50	0.80	15**	1.40	50	10	3
	7	CPL-5232-10-SMA-79	10* + 1.0	+ 0.50	0.80	15**	1.40	50	10	3
	7	CPL-5232-16-SMA-79	16* + 1.0	+ 0.50	0.80	15**	1.40	50	40	3
	7	CPL-5232-20-SMA-79	20* + 1.0	+ 0.50	0.80	15**	1.40	50	50	3

* Coupling is referenced to the output port.

** Directivity is 12 dB from 12.4 - 18.0 GHz.

MECHANICAL SPECIFICATIONS - INCHES (mm)

CASE STYLE	A	B	C	D	E	WEIGHT Oz	Gr
1	1.00 (25.4)	N/A	0.50 (12.7)	0.50 (12.7)	0.22 (5.6)	0.60	17.0
2	1.16 (29.4)	0.34 (8.7)	0.66 (16.7)	0.50 (12.7)	0.22 (5.6)	0.64	18.2
3	1.78 (45.2)	0.94 (23.8)	1.28 (32.5)	0.50 (12.7)	0.22 (5.6)	0.82	23.2
4	3.00 (76.2)	1.00 (25.4)	2.5 (63.5)	0.75 (19.1)	0.31 (7.9)	1.50	43.0
5	1.00 (25.4)	N/A	0.50 (12.7)	0.63 (15.9)	0.22 (5.6)	0.67	19.0
6	3.50 (88.9)	2.00 (50.8)	3.00 (76.2)	0.75 (19.1)	0.25 (6.3)	1.75	49.6
7	2.00 (50.8)	0.95 (24.2)	1.50 (38.1)	0.63 (16.0)	0.22 (5.6)	1.30	36.9

Note: TNC or Type N output connectors are available by substituting "TNC" or "NNN" for "SMA" in the Model Number.


[Shopping Cart](#)
[Order Status](#)
[Help Desk](#)
[About Midwest](#)
[Contact Midwest](#)
[Authorized Distributors & Sales Representatives](#)
[Distributors Only](#)
[Customer Login](#) United States

[Try our New Search!](#)

[< Return to Product Categories](#)

Using our web search engine is easy. You can search based on any of the following techniques:

1. Enter a precise Midwest Model Number (ie. ATT-0290-03-SMA-02)
2. Enter an older version of the Midwest Model Number (ie. 290M would return all 10 dB SMA attenuators)
3. Enter any portion of a Midwest Model Number (ie. ATT-10 SMA would return all 10 dB SMA attenuators)
4. Enter a text based description (ie. 3 dB 50 Ohm STD SMA N Attenuator would return representative products)
5. Enter a competitors model number (ie. M/A-COM Model 3082-6191-03 TNC would return the corresponding Midwest equivalent ATT-0292-08-HEX-02)

CPL-5212-06-NNN-79	Coupler	4	50	STD	N	F	10
CPL-5212-10-SMA-79	Coupler	4	50	STD	SMA	F	10
CPL-5212-10-TNC-79	Coupler	4	50	STD	TNC	F	10
CPL-5212-20-NNN-79	Coupler	4	50	STD	N	F	20
CPL-5212-20-SMA-79	Coupler	4	50	STD	SMA	F	20
CPL-5212-20-TNC-79	Coupler	4	50	STD	TNC	F	20
CPL-5212-30-NNN-79	Coupler	4	50	STD	N	F	30
CPL-5212-30-SMA-79	Coupler	4	50	STD	SMA	F	30
CPL-5212-30-TNC-79	Coupler	4	50	STD	TNC	F	30

[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)
[More Details](#)

We also have

Attenuator

BUY NOW Our Price: **\$222.00**



ATT-0640-06-29M-02
6 dB DC-40 Ghz Attenuator
Subminiature Minipad
2.9mm/2.9mm 1 watt
Passivated

[Click for More Info](#)

Adapter

BUY NOW Our Price: **\$55.40**



ADT-2698-SF-SSF-02
25 Ghz Adapter Between-
Series Female/Female
SMA/SSMA Passivated

[Click for More Info](#)

All rights reserved. ©2002 Midwest Microwave