K9F2G08X0B

INFORMATION IN THIS DOCUMENT IS PROVIDED IN RELATION TO SAMSUNG PRODUCTS, AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTHING IN THIS DOCUMENT SHALL BE CONSTRUED AS GRANTING ANY LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE,

TO ANY INTELLECTUAL PROPERTY RIGHTS IN SAMSUNG PRODUCTS OR TECHNOLOGY. ALL INFORMATION IN THIS DOCUMENT IS PROVIDED

ON AS "AS IS" BASIS WITHOUT GUARANTEE OR WARRANTY OF ANY KIND.

1. For updates or additional information about Samsung products, contact your nearest Samsung office.

2. Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where Product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

* Samsung Electronics reserves the right to change products or specification without notice.



Document Title

256M x 8 Bit NAND Flash Memory

Revision History

<u>Revision No</u>	History	Draft Date	<u>Remark</u>
0.0	1. Initial issue	Feb. 15th 2008	Advance
0.1	2. Min. tCSD is changed from 10ns to 0ns	Apr. 22th 2008	Preliminary

The attached data sheets are prepared and approved by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications. SAMSUNG Electronics will evaluate and reply to your requests and questions about device. If you have any questions, please contact the SAMSUNG branch office near your office.



256M x 8 Bit NAND Flash Memory

PRODUCT LIST

Part Number	Vcc Range	Organization	PKG Type	
K9F2G08B0B-P	2.5 ~ 2.9V	X8	TSOP1	
K9F2G08U0B-P	2.7 ~ 3.6v	70	10011	

FEATURES

- Voltage Supply
- 2.7V device(K9F2G08B0B): 2.50V ~ 2.90V
- 3.3V device(K9F2G08U0B): 2.70V ~ 3.60V
- Organization
- Memory Cell Array : (256M + 8M) x 8bit - Data Register : (2K + 64) x 8bit
- Automatic Program and Erase
- Page Program : (2K + 64)Byte
- Block Erase : (128K + 4K)Byte
- Page Read Operation
- Page Size : (2K + 64)Byte
- Random Read : 25µs(Max.)
- Serial Access : 25ns(Min.)

- Fast Write Cycle Time
- Page Program time : 200µs(Typ.)
- Block Erase Time : 1.5ms(Typ.)
- Command/Address/Data Multiplexed I/O Port
- Hardware Data Protection
- Program/Erase Lockout During Power Transitions
- Reliable CMOS Floating-Gate Technology
- -Endurance : 100K Program/Erase Cycles(with 1bit/512Byte ECC)
- Data Retention : 10 Years
- Command Driven Operation
- Unique ID for Copyright Protection
- Package :
- K9F2G08X0B-PCB0/PIB0 : Pb-FREE PACKAGE 48 - Pin TSOP I (12 x 20 / 0.5 mm pitch)


GENERAL DESCRIPTION

Offered in 256Mx8bit, the K9F2G08X0B is a 2G-bit NAND Flash Memory with spare 64M-bit. Its NAND cell provides the most costeffective solution for the solid state application market. A program operation can be performed in typical 200µs on the (2K+64)Byte page and an erase operation can be performed in typical 1.5ms on a (128K+4K)Byte block. Data in the data register can be read out at 25ns cycle time per Byte. The I/O pins serve as the ports for address and data input/output as well as command input. The on-chip write controller automates all program and erase functions including pulse repetition, where required, and internal verification and margining of data. Even the write-intensive systems can take advantage of the K9F2G08X0B's extended reliability of 100K program/ erase cycles by providing ECC(Error Correcting Code) with real time mapping-out algorithm. The K9F2G08X0B is an optimum solution for large nonvolatile storage applications such as solid state file storage and other portable applications requiring non-volatility.



PIN CONFIGURATION (TSOP1)

K9F2G08X0B-PCB0/PIB0

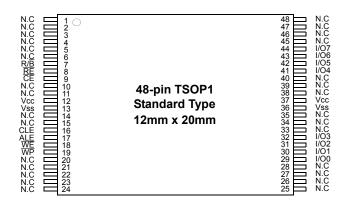


PACKAGE DIMENSIONS

SAMSUNG

ELECTRONICS

48-PIN LEAD/LEAD FREE PLASTIC THIN SMALL OUT-LINE PACKAGE TYPE(I)

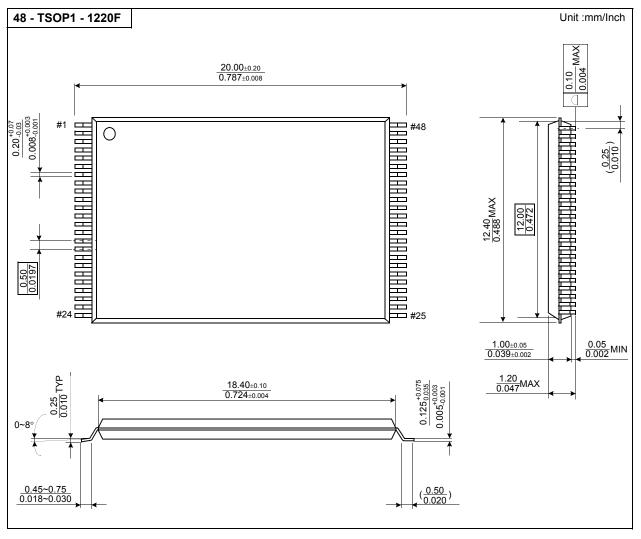

Samsung Confidential

4

PIN DESCRIPTION

Pin Name	Pin Function
I/Oo ~ I/O7	DATA INPUTS/OUTPUTS The I/O pins are used to input command, address and data, and to output data during read operations. The I/ O pins float to high-z when the chip is deselected or when the outputs are disabled.
CLE	COMMAND LATCH ENABLE The CLE input controls the activating path for commands sent to the command register. When active high, commands are latched into the command register through the I/O ports on the rising edge of the WE signal.
ALE	ADDRESS LATCH ENABLE The ALE input controls the activating path for address to the internal address registers. Addresses are latched on the rising edge of \overline{WE} with ALE high.
CE	CHIP ENABLE The CE input is the device selection control. When the device is in the Busy state, CE high is ignored, and the device does not return to standby mode in program or erase operation.
RE	READ ENABLE The RE input is the serial data-out control, and when active drives the data onto the I/O bus. Data is valid tREA after the falling edge of RE which also increments the internal column address counter by one.
WE	WRITE ENABLE The WE input controls writes to the I/O port. Commands, address and data are latched on the rising edge of the WE pulse.
WP	WRITE PROTECT The WP pin provides inadvertent program/erase protection during power transitions. The internal high volt- age generator is reset when the WP pin is active low.
R/B	READY/BUSY OUTPUT The R/B output indicates the status of the device operation. When low, it indicates that a program, erase or random read operation is in process and returns to high state upon completion. It is an open drain output and does not float to high-z condition when the chip is deselected or when outputs are disabled.
Vcc	POWER Vcc is the power supply for device.
Vss	GROUND
N.C	NO CONNECTION Lead is not internally connected.

NOTE : Connect all Vcc and Vss pins of each device to common power supply outputs. Do not leave Vcc or Vss disconnected.






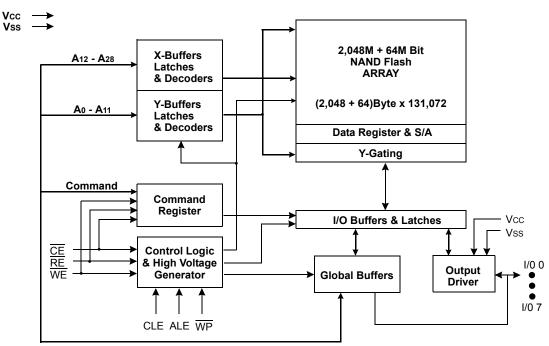


Figure 2. K9F2G08X0B Array Organization

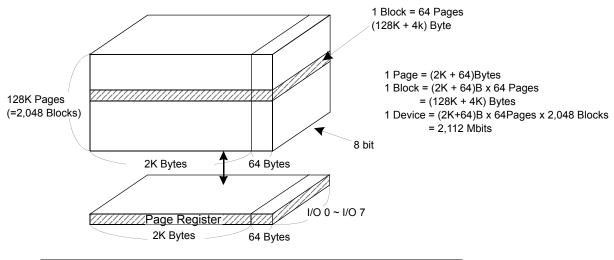

	I/O 0	I/O 1	I/O 2	I/O 3	I/O 4	I/O 5	I/O 6	I/O 7	
1st Cycle	Ao	A1	A2	Аз	A4	A5	A6	A7	Column Address
2nd Cycle	A8	A9	A10	A11	*L	*L	*L	*L	Column Address
3rd Cycle	A12	A13	A14	A15	A16	A17	A18	A19	Row Address
4th Cycle	A20	A 21	A22	A23	A24	A25	A26	A27	Row Address
5th Cycle	A28	*L	*L	*L	*L	*L	*L	*L	Row Address

NOTE : Column Address : Starting Address of the Register.

* L must be set to "Low".

* The device ignores any additional input of address cycles than required.



Product Introduction

The K9F2G08X0B is a 2,112Mbit(2,214,592,512 bit) memory organized as 131,072 rows(pages) by 2,112x8 columns. Spare 64x8 columns are located from column address of 2,048~2,111. A 2,112-byte data register is connected to memory cell arrays accommodating data transfer between the I/O buffers and memory during page read and page program operations. The memory array is made up of 32 cells that are serially connected to form a NAND structure. Each of the 32 cells resides in a different page. A block consists of two NAND structured strings. A NAND structure consists of 32 cells. Total 1,081,344 NAND cells reside in a block. The program and read operations are executed on a page basis, while the erase operation is executed on a block basis. The memory array consists of 2,048 separately erasable 128K-byte blocks. It indicates that the bit by bit erase operation is prohibited on the K9F2G08X0B.

The K9F2G08X0B has addresses multiplexed into 8 I/Os. This scheme dramatically reduces pin counts and allows system upgrades to future densities by maintaining consistency in system board design. Command, address and data are all written through I/O's by bringing WE to low while CE is low. Those are latched on the rising edge of WE. Command Latch Enable(CLE) and Address Latch Enable(ALE) are used to multiplex command and address respectively, via the I/O pins. Some commands require one bus cycle. For example, Reset Command, Status Read Command, etc require just one cycle bus. Some other commands, like page read and block erase and page program, require two cycles: one cycle for setup and the other cycle for execution. The 264M byte physical space requires 29 addresses, thereby requiring five cycles for addressing : 2 cycles of column address, 3 cycles of row address, in that order. Page Read and Page Program need the same five address cycles following the required command input. In Block Erase operation, however, only the three row address cycles are used. Device operations are selected by writing specific commands into the command register. Table 1 defines the specific commands of the K9F2G08X0B.

Function	1st Cycle	2nd Cycle	Acceptable Command during Busy
Read	00h	30h	
Read for Copy Back	00h	35h	
Read ID	90h	-	
Reset	FFh	-	0
Page Program	80h	10h	
Two-Plane Page Program ⁽¹⁾	80h11h	81h10h	
Copy-Back Program	85h	10h	
Two-Plane Copy-Back Program ⁽¹⁾	85h11h	81h10h	
Block Erase	60h	D0h	
Two-Plane Block Erase	60h60h	D0h	
Random Data Input ⁽²⁾	85h	-	
Random Data Output ⁽²⁾	05h	E0h	
Read Status	70h	-	0
Read Status 2	F1h	-	0

Table 1. Command Sets

NOTE : 1. Any command between 11h and 81h is prohibited except 70h/F1h and FFh.

2. Random Data Input/Output can be executed in a page.

Caution : Any undefined command inputs are prohibited except for above command set of Table 1.



ABSOLUTE MAXIMUM RATINGS

Para	ameter	Symbol	Rating	Unit
		Vcc	-0.6 to +4.6	
Voltage on any pin rela	ative to VSS	VIN	-0.6 to +4.6	V
		Vi/o	-0.6 to Vcc + 0.3 (< 4.6V)	
Temperature Under	K9F2G08X0B-XCB0	Touro	-10 to +125	°C
Bias	K9F2G08X0B-XIB0	TBIAS	-40 to +125	-0
Storogo Tomporaturo	K9F2G08X0B-XCB0	Тото	65 to 1150	°C
Storage Temperature	K9F2G08X0B-XIB0	- Tstg	-65 to +150	-0
Short Circuit Current		los	5	mA

NOTE :

1. Minimum DC voltage is -0.6V on input/output pins. During transitions, this level may undershoot to -2.0V for periods <30ns.

Maximum DC voltage on input/output pins is Vcc+0.3V which, during transitions, may overshoot to Vcc+2.0V for periods <20ns.

2. Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED OPERATING CONDITIONS

(Voltage reference to GND, K9F2G08X0B-XCB0 :TA=0 to 70°C, K9F2G08X0B-XIB0:TA=-40 to 85°C)

Parameter Symb			2.7V			Unit		
Falameter	Symbol	Min	Тур.	Max	Min	Тур.	Max	Onit
Supply Voltage	Vcc	2.5	2.7	2.9	2.7	3.3	3.6	V
Supply Voltage	Vss	0	0	0	0	0	0	V

DC AND OPERATING CHARACTERISTICS (Recommended operating conditions otherwise noted.)

D	Parameter		Test Conditions		2.7V			3.3V		Unit
Falailletel		Symbol	Test Conditions		Тур	Max	Min Typ Max			Unit
Operating	Page Read with Serial Access	Icc1	tRC=25ns CE=Vi∟, Iou⊤=0mA	=VIL, IOUT=0mA						
Current	Program	Icc2	-	-	15	30	-	15	30	mA
	Erase	Icc3	-							
Stand-by C	urrent(TTL)	Isb1	CE=VIH, WP=0V/Vcc	-	-	1	-	-	1	
Stand-by C	Stand-by Current(CMOS) IsB2		CE=Vcc-0.2, WP=0V/Vcc	-	10	50	-	10	50	
Input Leakage Current		ILI	VIN=0 to Vcc(max)	-	-	±10	-	-	±10	μA
Output Lea	Output Leakage Current ILO		Vout=0 to Vcc(max) ±10		±10	-	-	±10		
Input High	Voltage	VIH ⁽¹⁾	-	Vcc-0.4	-	Vcc+0.3	2.0	-	Vcc+0.3	
Input Low V	Voltage, All inputs	VIL ⁽¹⁾	-	-0.3	-	0.5	-0.3	-	0.8	
Output High Voltage Level		Vон	К9F2G08B0B: Іон=-100µA К9F2G08U0B: Іон=-400µA	Vcc-0.4			2.4	-	-	V
Output Low Voltage Level Vol		К9F2G08B0B: IoL=100µA К9F2G08U0B: IoL=2.1mA	-	-	0.4	-	-	0.4		
Output Low Current(R/B) Ior (R/B)		K9F2G08B0B: Vol=0.1V K9F2G08U0B: Vol=0.4V	3	4		8	10	-	mA	

NOTE : 1. VIL can undershoot to -0.4V and VIH can overshoot to VCC +0.4V for durations of 20 ns or less.

2. Typical value is measured at Vcc=2.7V/3.3V, TA=25°C. Not 100% tested.



VALID BLOCK

Parameter	Symbol	Min	Тур.	Мах	Unit
K9F2G08X0B	N∨в	2,008	-	2,048	Blocks

NOTE :

1. The device may include initial invalid blocks when first shipped. Additional invalid blocks may develop while being used. The number of valid blocks is presented with both cases of invalid blocks considered. Invalid blocks are defined as blocks that contain one or more bad bits. Do not erase or program factory-marked bad blocks. Refer to the attached technical notes for appropriate management of invalid blocks.

2. The 1st block, which is placed on 00h block address, is guaranteed to be a valid block up to 1K program/erase cycles with 1bit/512Byte ECC.

3. The number of valid block is on the basis of single plane operations, and this may be decreased with two plane operations.

AC TEST CONDITION

(K9F2G08X0B-XCB0 :Ta=0 to 70°C, K9F2G08X0B-XIB0:Ta=-40 to 85°C, K9F2G08B0B: Vcc=2.5V~2.9V, K9F2G08U0B: Vcc=2.7V~3.6V unless otherwise noted)

Parameter	K9F2G08X0B		
Input Pulse Levels	0V to Vcc		
Input Rise and Fall Times	5ns		
Input and Output Timing Levels	Vcc/2		
Output Load	1 TTL GATE and CL=50pF		

CAPACITANCE(TA=25°C, Vcc=2.7V/3.3V, f=1.0MHz)

Item	Symbol	Test Condition	Min	Мах	Unit
Input/Output Capacitance	Ci/o	VIL=0V	-	10	pF
Input Capacitance	CIN	VIN=0V	-	10	pF

NOTE : Capacitance is periodically sampled and not 100% tested.

MODE SELECTION

CLE	ALE	CE	WE	RE	WP	Mode		
Н	L	L		Н	х	- Read Mode	Command Input	
L	Н	L		Н	Х	I Leau Moue	Address Input(5clock)	
Н	L	L		Н	Н	Write Mode	Command Input	
L	Н	L		Н	Н	White Mode	Address Input(5clock)	
L	L	L		Н	Н	Data Input		
L	L	L	Н	▼	Х	Data Output		
Х	Х	Х	Х	Н	Х	During Read	(Busy)	
Х	Х	Х	Х	Х	Н	During Prog	ram(Busy)	
Х	Х	Х	Х	Х	Н	During Erase(Busy)		
Х	X ⁽¹⁾	Х	Х	Х	L	Write Protect		
Х	Х	Н	Х	Х	0V/Vcc(2)	Stand-by		

NOTE : 1. X can be VIL or VIH.

2. WP should be biased to CMOS high or CMOS low for standby.



Program / Erase Characteristics

Parameter	Symbol	Min	Тур	Max	Unit
Program Time	t PROG	-	200	700	μs
Dummy Busy Time for Two-Plane Page Program	t DBSY	-	0.5	1	μs
Number of Partial Program Cycles	Nop	-	-	4	cycles
Block Erase Time	tBERS	-	1.5	10	ms

NOTE :

1. Typical value is measured at Vcc=3.3V, TA=25°C. Not 100% tested.

2. Typical program time is defined as the time within which more than 50% of the whole pages are programmed at 3.3V Vcc and 25°C temperature.

AC Timing Characteristics for Command / Address / Data Input

Parameter	Symbol	Min	Мах	Unit
CLE Setup Time	tcls ⁽¹⁾	12	-	ns
CLE Hold Time	tclн	5	-	ns
CE Setup Time	tcs ⁽¹⁾	20	-	ns
CE Hold Time	tсн	5	-	ns
WE Pulse Width	twp	12	-	ns
ALE Setup Time	tals ⁽¹⁾	12	-	ns
ALE Hold Time	talh	5	-	ns
Data Setup Time	tDS ⁽¹⁾	12	-	ns
Data Hold Time	tDH	5	-	ns
Write Cycle Time	twc	25	-	ns
WE High Hold Time	twн	10	-	ns
Address to Data Loading Time	tadl ⁽²⁾	100	-	ns

NOTES : 1. The transition of the corresponding control pins must occur only once while WE is held low 2. tADL is the time from the WE rising edge of final address cycle to the WE rising edge of first data cycle



AC Characteristics for Operation

Parameter	Symbol	Min	Мах	Unit
Data Transfer from Cell to Register	tR	-	25	μs
ALE to RE Delay	tar	10	-	ns
CLE to RE Delay	tCLR	10	-	ns
Ready to RE Low	trr	20	-	ns
RE Pulse Width	tRP	12	-	ns
WE High to Busy	twв	-	100	ns
Read Cycle Time	tRC	25	-	ns
RE Access Time	trea	-	20	ns
CE Access Time	tCEA	-	25	ns
RE High to Output Hi-Z	tRHZ	-	100	ns
CE High to Output Hi-Z	tснz	-	30	ns
CE High to ALE or CLE Don't Care	tcsp	0	-	ns
RE High to Output Hold	trнон	15	-	ns
RE Low to Output Hold	t RLOH	5	-	ns
CE High to Output Hold	tсон	15	-	ns
RE High Hold Time	treh	10	-	ns
Output Hi-Z to RE Low	tır	0	-	ns
RE High to WE Low	tкнw	100	-	ns
WE High to RE Low	twhr	60	-	ns
Device Resetting Time(Read/Program/Erase)	trst	-	5/10/500(1)	μS

NOTE : 1. If reset command(FFh) is written at Ready state, the device goes into Busy for maximum $5\mu s$.



NAND Flash Technical Notes

Initial Invalid Block(s)

Initial invalid blocks are defined as blocks that contain one or more initial invalid bits whose reliability is not guaranteed by Samsung. The information regarding the initial invalid block(s) is called the initial invalid block information. Devices with initial invalid block(s) have the same quality level as devices with all valid blocks and have the same AC and DC characteristics. An initial invalid block(s) does not affect the performance of valid block(s) because it is isolated from the bit line and the common source line by a select transistor. The system design must be able to mask out the initial invalid block(s) via address mapping. The 1st block, which is placed on 00h block address, is guaranteed to be a valid block up to 1K program/erase cycles with 1bit/512Byte ECC.

Identifying Initial Invalid Block(s)

All device locations are erased(FFh) except locations where the initial invalid block(s) information is written prior to shipping. The initial invalid block(s) status is defined by the 1st byte in the spare area. Samsung makes sure that either the 1st or 2nd page of every initial invalid block has non-FFh data at the column address of 2048. Since the initial invalid block information is also erasable in most cases, it is impossible to recover the information once it has been erased. Therefore, the system must be able to recognize the initial invalid block(s) based on the original initial invalid block information and create the initial invalid block table via the following suggested flow chart(Figure 3). Any intentional erasure of the original initial invalid block information is prohibited.

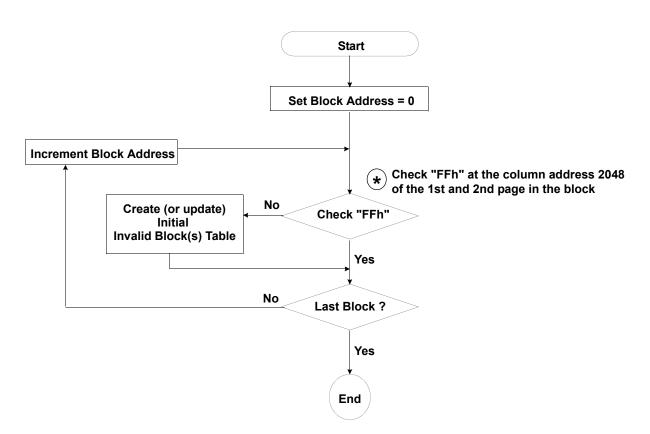


Figure 3. Flow chart to create initial invalid block table



NAND Flash Technical Notes (Continued)

Error in write or read operation


Within its life time, additional invalid blocks may develop with NAND Flash memory. Refer to the qualification report for the actual data. The following possible failure modes should be considered to implement a highly reliable system. In the case of status read failure after erase or program, block replacement should be done. Because program status fail during a page program does not affect the data of the other pages in the same block, block replacement can be executed with a page-sized buffer by finding an erased empty block and reprogramming the current target data and copying the rest of the replaced block. In case of Read, ECC must be employed. To improve the efficiency of memory space, it is recommended that the read or verification failure due to single bit error be reclaimed by ECC without any block replacement. The said additional block failure rate does not include those reclaimed blocks.

	Failure Mode	Detection and Countermeasure sequence
Write	Erase Failure	Status Read after Erase> Block Replacement
	Program Failure	Status Read after Program> Block Replacement
Read	Single Bit Failure	Verify ECC -> ECC Correction



: Error Correcting Code --> Hamming Code etc. Example) 1bit correction & 2bit detection


Program Flow Chart

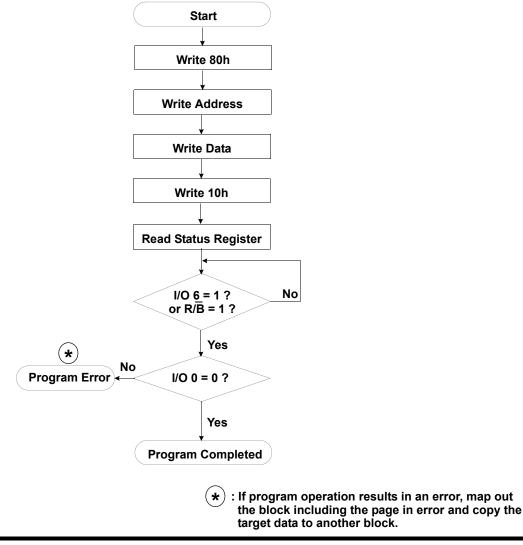



NAND Flash Technical Notes (Continued)


Erase Flow Chart

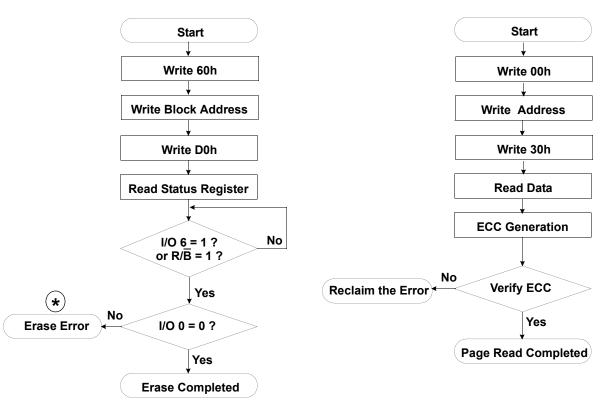

Read Flow Chart

(*) : If erase operation results in an error, map out the failing block and replace it with another block.

Block Replacement

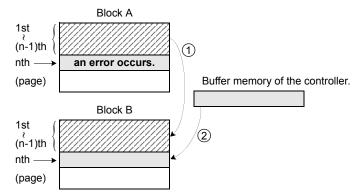

* Step1

When an error happens in the nth page of the Block 'A' during erase or program operation. * Step2

Copy the data in the 1st ~ (n-1)th page to the same location of another free block. (Block 'B') * Step3

Then, copy the nth page data of the Block 'A' in the buffer memory to the nth page of the Block 'B'. * Step4


Do not erase or program to Block 'A' by creating an 'invalid block' table or other appropriate scheme.




NAND Flash Technical Notes (Continued)

Addressing for program operation

Within a block, the pages must be programmed consecutively from the LSB(least significant bit) page of the block to the MSB(most significant bit) pages of the block. Random page address programming is prohibited. In this case, the definition of LSB page is the LSB among the pages to be programmed. Therefore, LSB doesn't need to be page 0.



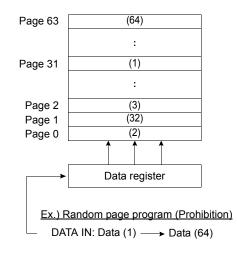



System Interface Using CE don't-care.

ELECTRONICS

For an easier system interface, \overline{CE} may be inactive during the data-loading or serial access as shown below. The internal 2,112byte data registers are utilized as separate buffers for this operation and the system design gets more flexible. In addition, for voice or audio applications which use slow cycle time on the order of μ -seconds, de-activating \overline{CE} during the data-loading and serial access would provide significant savings in power consumption.

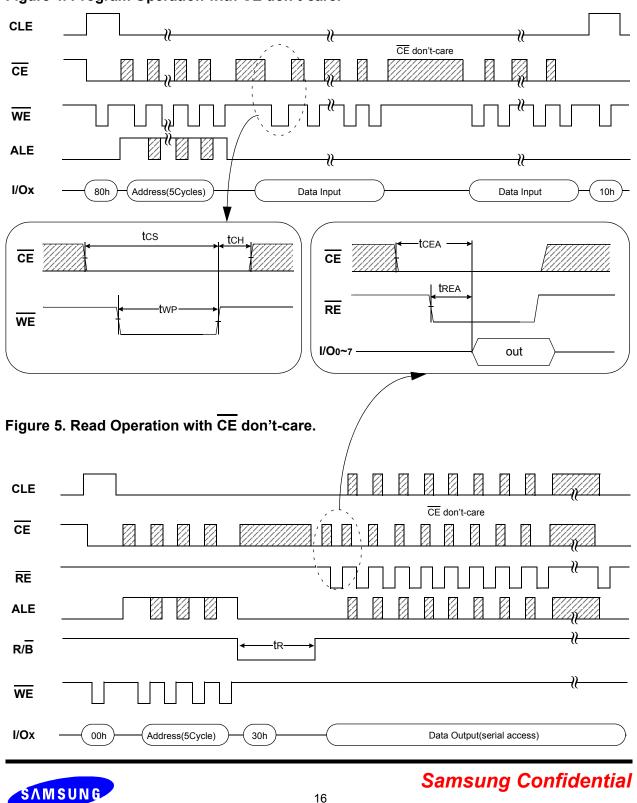



Figure 4. Program Operation with \overline{CE} don't-care.

K9F2G08B0B K9F2G08U0B


NOTE

Device	I/O	DATA	ADDRESS				
Device	l/Ox	Data In/Out	t Col. Add1 Col. Add2 Row Add1 Row Add2				Row Add3
K9F2G08X0B	I/O 0 ~ I/O 7	2,112byte	A0~A7	A8~A11	A12~A19	A20~A27	A28

Command Latch Cycle

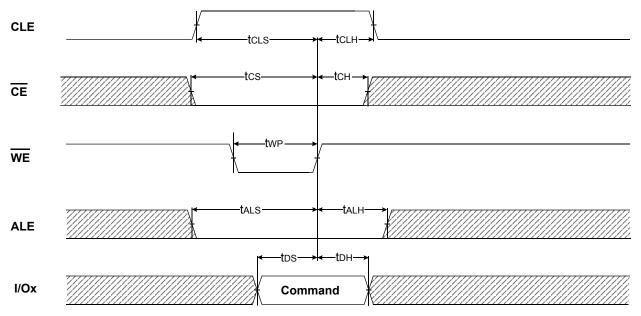


Address Latch Cycle

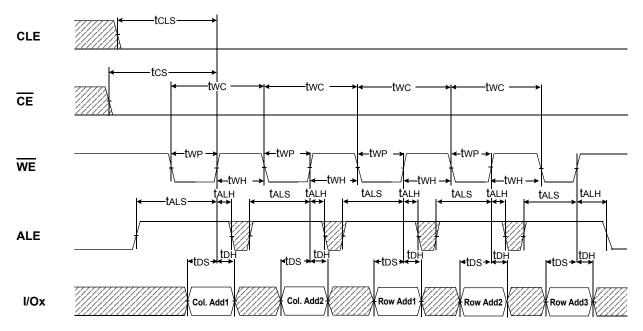




K9F2G08B0B K9F2G08U0B

Input Data Latch Cycle

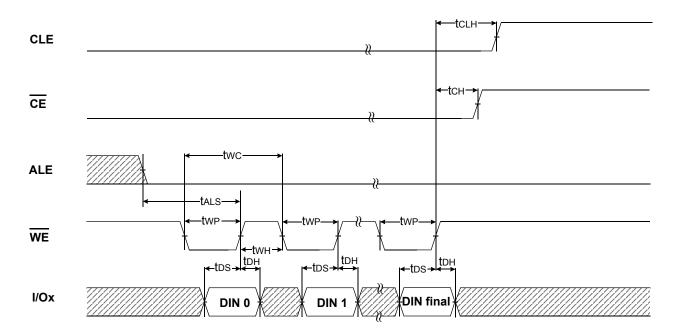


* Serial Access Cycle after Read(CLE=L, WE=H, ALE=L)

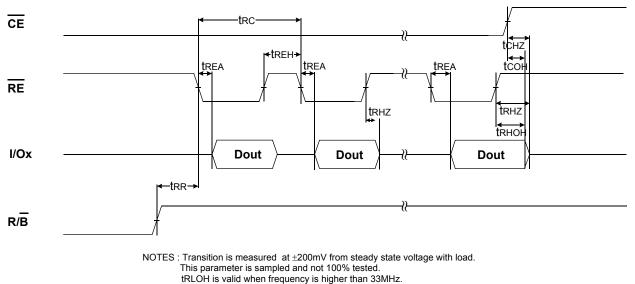

tRHOH starts to be valid when frequency is lower than 33MHz.




Serial Access Cycle after Read(EDO Type, CLE=L, WE=H, ALE=L)

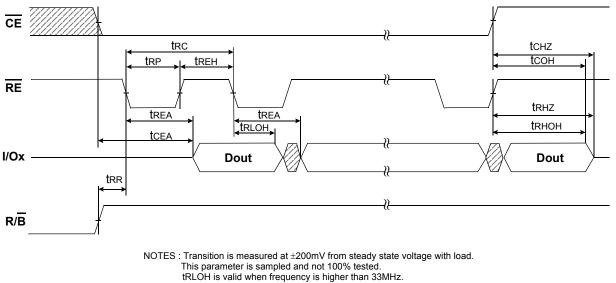

tRHOH starts to be valid when frequency is lower than 33MHz.


Status Read Cycle

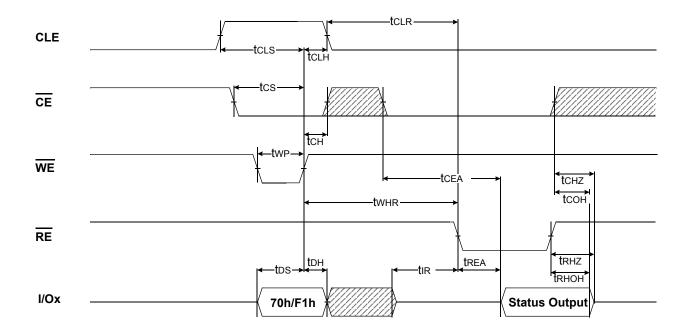




K9F2G08B0B K9F2G08U0B


Read Operation

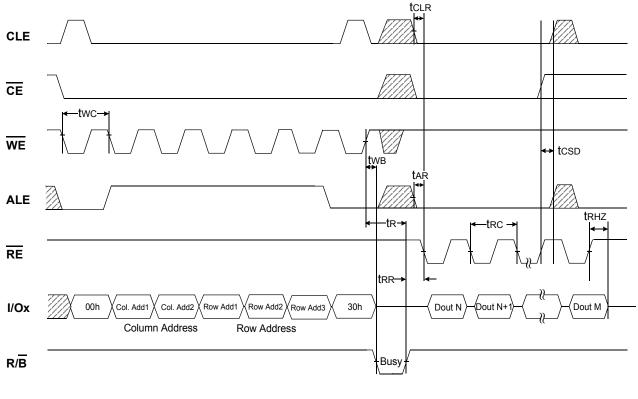

Read Operation(Intercepted by \overline{CE})

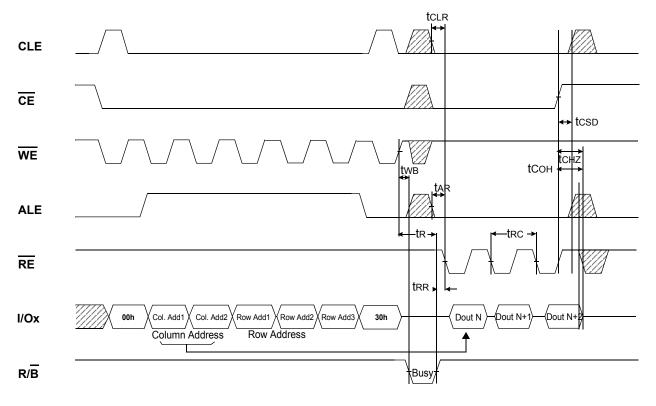


SAMSUNG ELECTRONICS

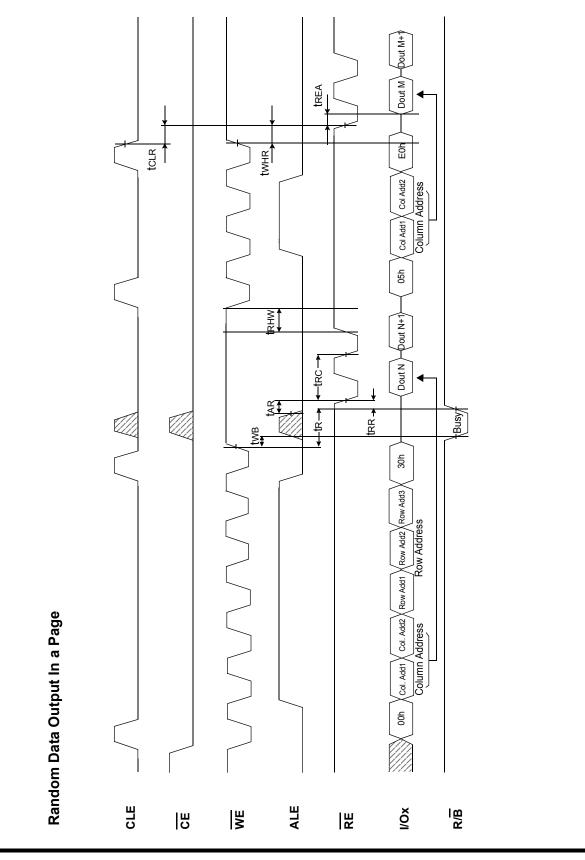




SAMSUNG

Page Program Operation

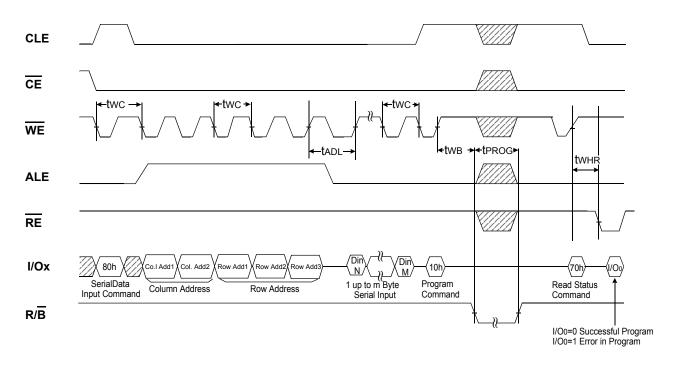


NOTES : tADL is the time from the \overline{WE} rising edge of final address cycle to the \overline{WE} rising edge of first data cycle.



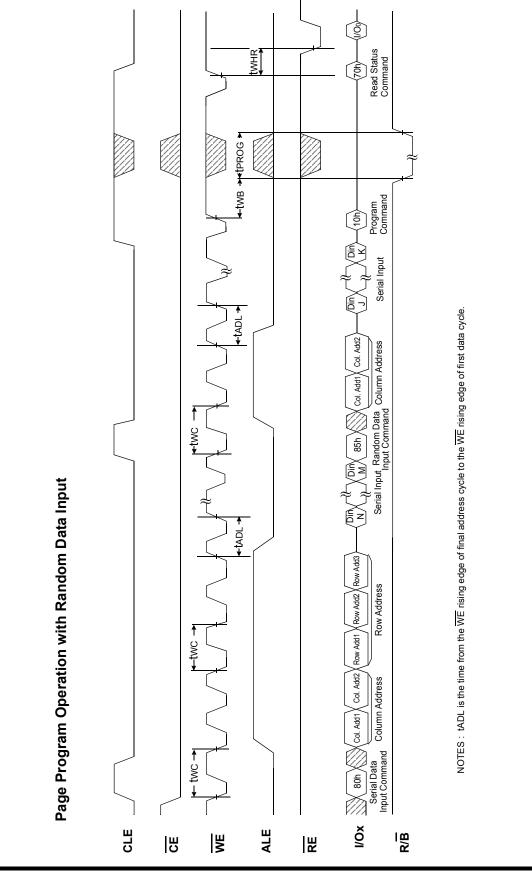


Preliminary FLASH MEMORY

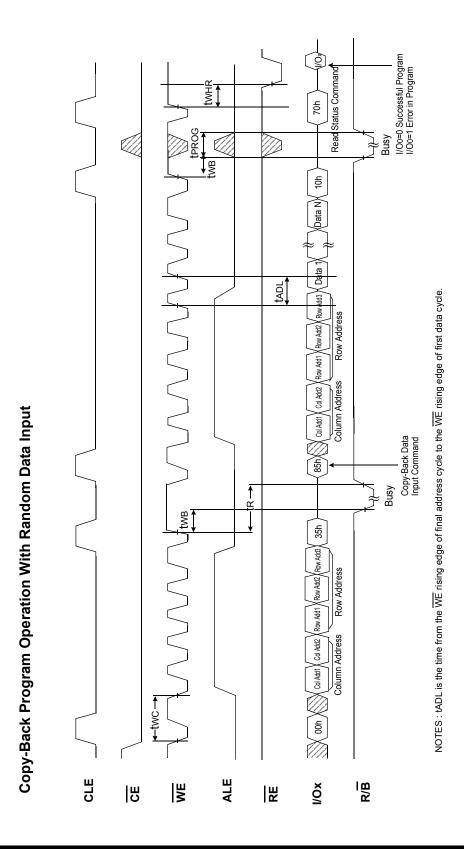


K9F2G08B0B K9F2G08U0B

SAMSUNG ELECTRONICS

Block Erase Operation

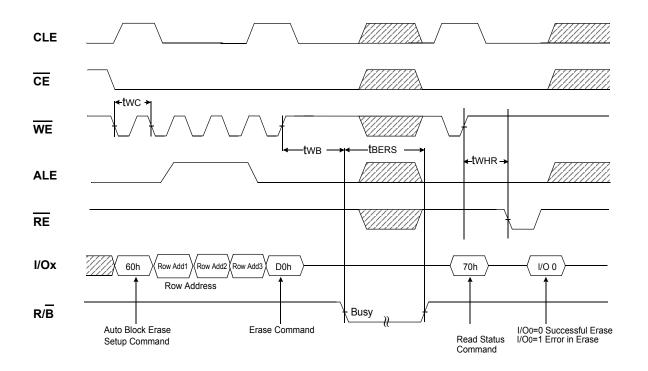



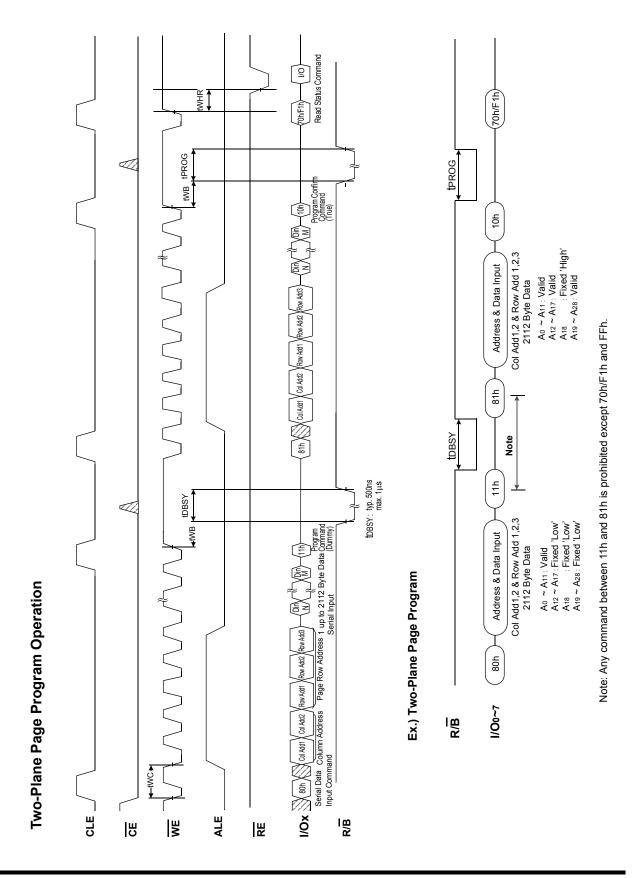


K9F2G08B0B K9F2G08U0B

SAMSUNG

ELECTRONICS

26

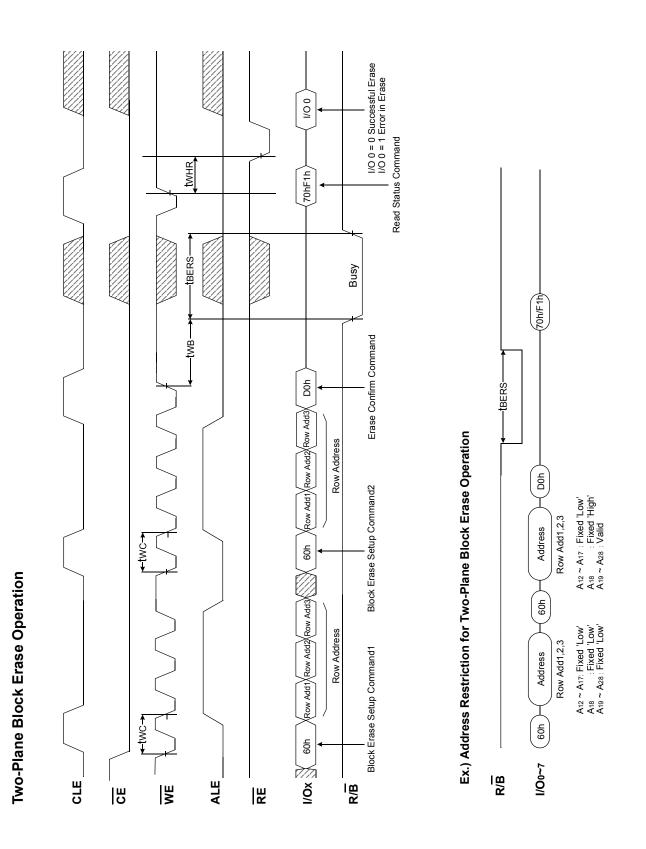


K9F2G08B0B K9F2G08U0B

SAMSUNG ELECTRONICS

Samsung Confidential

27

Read ID Operation

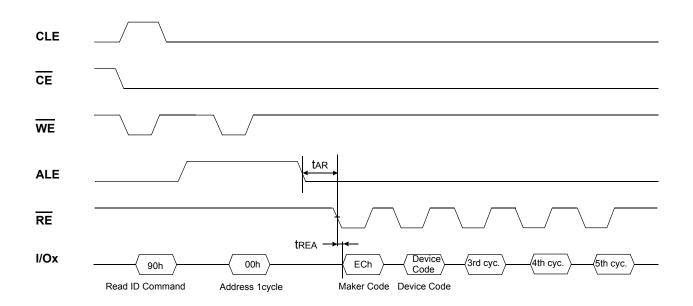

Device	Device Code (2nd Cycle)	3rd Cycle	4th Cycle	5th Cycle					
K9F2G08B0B		Same as K9F2G08U0B							
K9F2G08U0B	DAh	10h	95h	44h					



ID Definition Table

	Description
1 st Byte	Maker Code
2 nd Byte	Device Code
3 rd Byte	Internal Chip Number, Cell Type, Number of Simultaneously Programmed Pages, Etc
4 th Byte	Page Size, Block Size, Redundant Area Size, Organization, Serial Access Minimum
5 th Byte	Plane Number, Plane Size

3rd ID Data

	Description	I/O7	I/O6	I/O5	I/O4	I/O3	I/O2	I/O1	I/O0
Internal Chip Number	1 2 4 8							0 0 1 1	0 1 0 1
Cell Type	2 Level Cell 4 Level Cell 8 Level Cell 16 Level Cell					0 0 1 1	0 1 0 1		
Number of Simultaneously Programmed Pages	1 2 4 8			0 0 1 1	0 1 0 1				
Interleave Program Between multiple chips	Not Support Support		0 1						
Cache Program	Not Support Support	0 1							

4th ID Data

	Description	I/O7	I/O6	I/O5	I/O4	I/O3	I/O2	I/O1	I/O0
Page Size (w/o redundant area)	1KB 2KB 4KB 8KB							0 0 1 1	0 1 0 1
Block Size (w/o redundant area)	64KB 128KB 256KB 512KB			0 0 1 1	0 1 0 1				
Redundant Area Size (byte/512byte)	8 16						0 1		
Organization	x8 x16		0 1						
Serial Access Minimum	50ns/30ns 25ns Reserved Reserved	0 1 0 1				0 0 1 1			



5th ID Data

	Description	I/O7	I/O6	I/O5	I/O4	I/O3	I/O2	I/O1	I/O0
	1					0	0		
Diana Number	2					0	1		
Plane Number	4					1	0		
	8					1	1		
	64Mb		0	0	0				
	128Mb		0	0	1				
	256Mb		0	1	0				
Plane Size	512Mb		0	1	1				
(w/o redundant Area)	1Gb		1	0	0				
	2Gb		1	0	1				
	4Gb		1	1	0				
	8Gb		1	1	1				
Reserved		0						0	0



Device Operation

PAGE READ

Page read is initiated by writing 00h-30h to the command register along with five address cycles. After initial power up, 00h command is latched. Therefore only five address cycles and 30h command initiates that operation after initial power up. The 2,112 bytes of data within the selected page are transferred to the data registers in less than $25\mu s(tR)$. The system controller can detect the completion of this data transfer(tR) by analyzing the output of R/B pin. Once the data in a page is loaded into the data registers, they may be read out in 25ns cycle time by sequentially pulsing RE. The repetitive high to low transitions of the RE clock make the device output the data starting from the selected column address up to the last column address.

The device may output random data in a page instead of the consecutive sequential data by writing random data output command. The column address of next data, which is going to be out, may be changed to the address which follows random data output command. Random data output can be operated multiple times regardless of how many times it is done in a page.


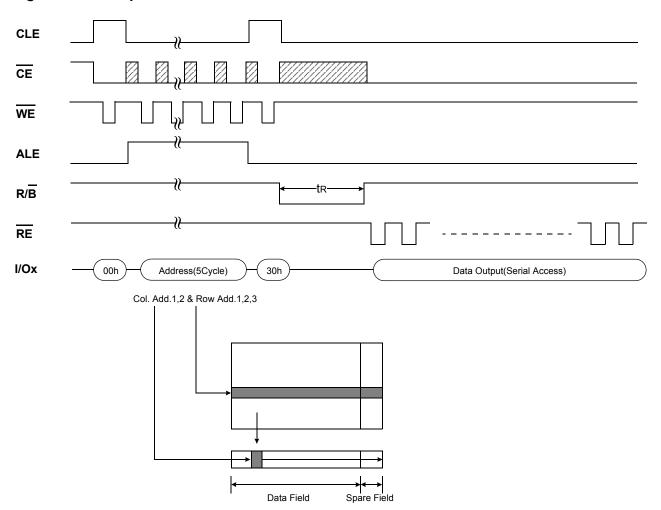


Figure 6. Read Operation



K9F2G08B0B K9F2G08U0B

Figure 7. Random Data Output In a Page

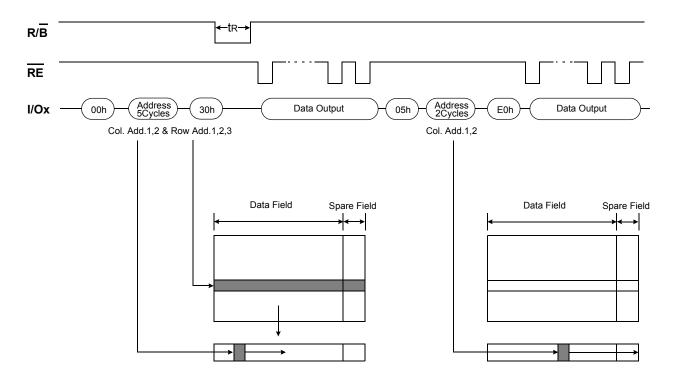

PAGE PROGRAM

The device is programmed basically on a page basis, but it does allow multiple partial page programming of a word or consecutive bytes up to 2,112, in a single page program cycle. The number of consecutive partial page programming operation within the same page without an intervening erase operation must not exceed 4 times for a single page. The addressing should be done in sequential order in a block. A page program cycle consists of a serial data loading period in which up to 2,112bytes of data may be loaded into the data register, followed by a non-volatile programming period where the loaded data is programmed into the appropriate cell. The serial data loading period begins by inputting the Serial Data Input command(80h), followed by the five cycle address inputs and then serial data loading. The words other than those to be programmed do not need to be loaded. The device supports random data input in a page. The column address for the next data, which will be entered, may be changed to the address which follows random data input command(85h). Random data input may be operated multiple times regardless of how many times it is done in a page. The Page Program confirm command(10h) initiates the programming process. Writing 10h alone without previously entering the serial data will not initiate the programming process. The internal write state controller automatically executes the algorithms and timings necessary for program and verify, thereby freeing the system controller for other tasks. Once the program process starts, the Read Status Register command may be entered to read the status register. The system controller can detect the completion of a program cycle by monitoring the R/B output, or the Status bit(I/O 6) of the Status Register. Only the Read Status command and Reset command are valid while programming is in progress. When the Page Program is complete, the Write Status Bit(I/O 0) may be checked(Figure 8). The internal write verify detects only errors for "1"s that are not successfully programmed to "0"s. The command register remains in Read Status command mode until another valid command is written to the command register.


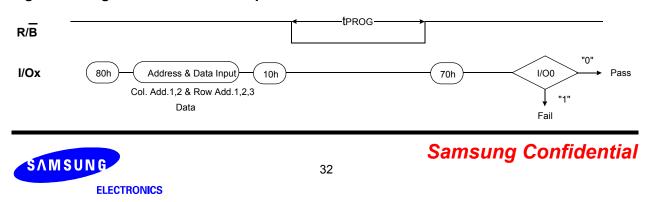


Figure 8. Program & Read Status Operation

Figure 9. Random Data Input In a Page

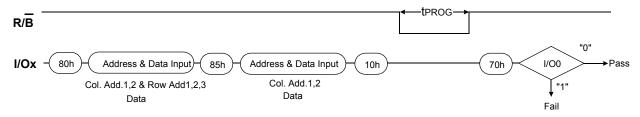


Copy-Back Program

Copy-Back program with Read for Copy-Back is configured to quickly and efficiently rewrite data stored in one page without data reloading when the bit error is not in data stored. Since the time-consuming re-loading cycles are removed, the system performance is improved. The benefit is especially obvious when a portion of a block is updated and the rest of the block also needs to be copied to the newly assigned free block. Copy-Back operation is a sequential execution of Read for Copy-Back and of copy-back program with the destination page address. A read operation with "35h" command and the address of the source page moves the whole 2,112-byte data into the internal data buffer. A bit error is checked by sequential reading the data output. In the case where there is no bit error, the data do not need to be reloaded. Therefore Copy-Back program operation is initiated by issuing Page-Copy Data-Input command (85h) with destination page address. Actual programming operation begins after Program Confirm command (10h) is issued. Once the program process starts, the Read Status Register command (70h) may be entered to read the status register. The system controller can detect the completion of a program cycle by monitoring the R/B output, or the Status bit(I/O 6) of the Status Register. When the Copy-Back Program is complete, the Write Status Bit(I/O 0) may be checked(Figure 10 & Figure 11). The command register remains in Read Status command mode until another valid command is written to the command register.


During copy-back program, data modification is possible using random data input command (85h) as shown in Figure 11.

Figure 10. Page Copy-Back Program Operation

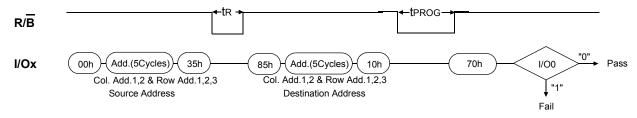

Note : Copy-Back Program operation is allowed only within the same memory plane.



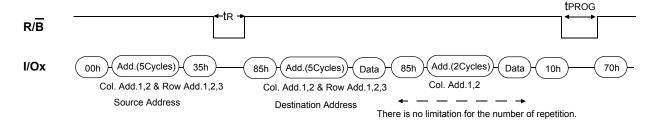




BLOCK ERASE

The Erase operation is done on a block basis. Block address loading is accomplished in three cycles initiated by an Erase Setup command(60h). Only address A18 to A28 is valid while A12 to A17 is ignored. The Erase Confirm command(D0h) following the block address loading initiates the internal erasing process. This two-step sequence of setup followed by execution command ensures that memory contents are <u>not</u> accidentally erased due to external noise conditions.

At the rising edge of $\overline{\text{WE}}$ after the erase confirm command input, the internal write controller handles erase and erase-verify. When the erase operation is completed, the Write Status Bit(I/O 0) may be checked. Figure 13 details the sequence.



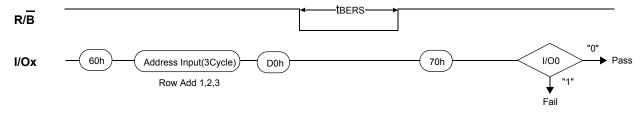


Two-Plane Page Program

Two-Plane Page Program is an extension of Page Program, for a single plane with 2,112 byte page registers. Since the device is equipped with two memory planes, activating the two sets of 2,112 byte page registers enables a simultaneous programming of two pages.

After writing the first set of data up to 2,112 byte into the selected page register, Dummy Page Program command (11h) instead of actual Page Program command (10h) is inputted to finish data-loading of the first plane. Since no programming process is involved, R/B remains in Busy state for a short period of time(tDBSY). Read Status command (70h/F1h) may be issued to find out when the device returns to Ready state by polling the Ready/Busy status bit(I/O 6). Then the next set of data for the other plane is inputted after the 81h command and address sequences. After inputting data for the last plane, actual True Page Program(10h) instead of dummy Page Program command (11h) must be followed to start the programming process. The operation of R/B and Read Status is the same as that of Page Program. Although two planes are programmed simultaneously, pass/fail is not available for each page when the program operation completes. Status bit of I/O 0 is set to "1" when any of the pages fails. Restriction in addressing with Two-Plane Page Program is shown is Figure 14.




Figure 14. Two-Plane Page Program

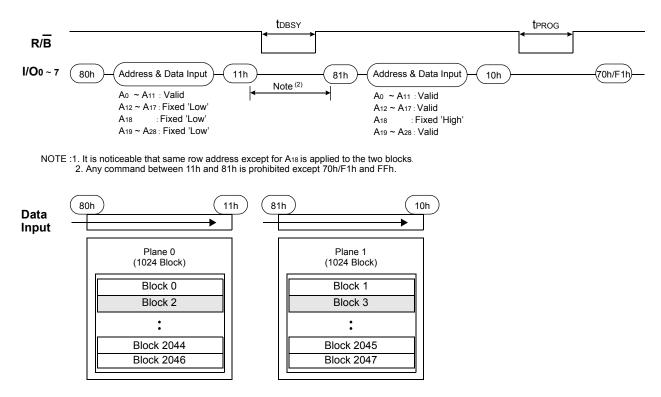

Two-Plane Block Erase

Basic concept of Two-Plane Block Erase operation is identical to that of Two-Plane Page Program. Up to two blocks, one from each plane can be simultaneously erased. Standard Block Erase command sequences (Block Erase Setup command(60h) followed by three address cycles) may be repeated up to twice for erasing up to two blocks. Only one block should be selected from each plane. The Erase Confirm command(D0h) initiates the actual erasing process. The completion is detected by monitoring R/B pin or Ready/ Busy status bit (I/O 6).


Figure 15. Two-Plane Block Erase Operation

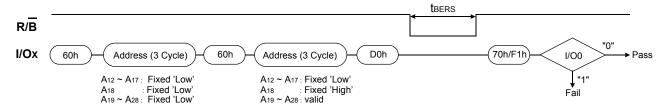




Two-Plane Copy-Back Program

Two-Plane Copy-Back Program is an extension of Copy-Back Program, for a single plane with 2,112 byte page registers. Since the device is equipped with two memory planes, activating the two sets of 2,112 byte page registers enables a simultaneous programming of two pages.



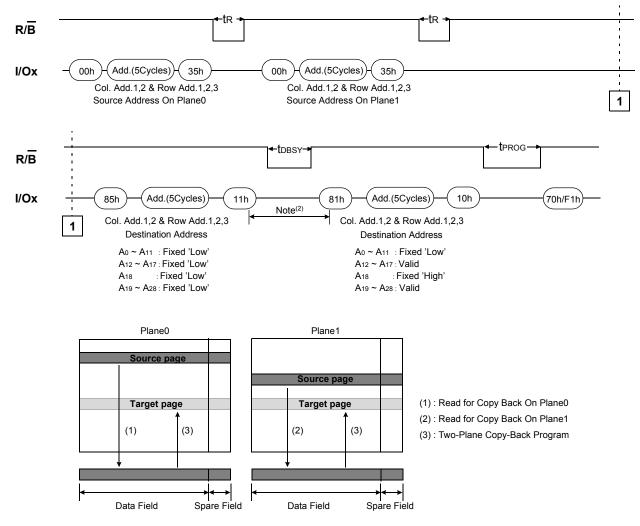

Note : 1. Copy-Back Program operation is allowed only within the same memory plane. 2. Any command between 11h and 81h is prohibited except 70h/F1h and FFh.



K9F2G08B0B K9F2G08U0B

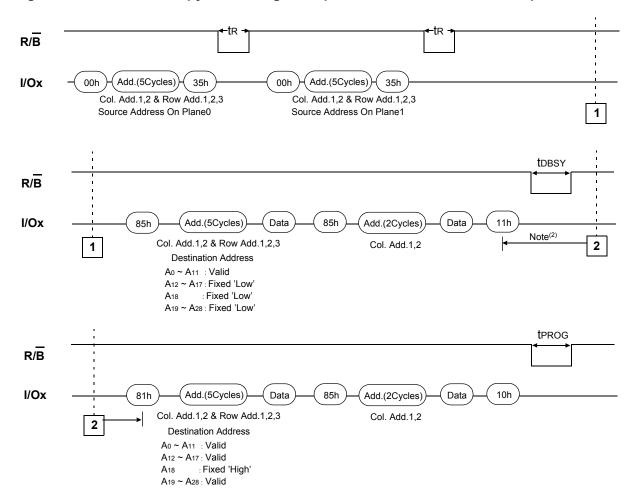


Figure 17. Two-Plane Copy-Back Program Operation with Random Data Input

Note : 1. Copy-Back Program operation is allowed only within the same memory plane. 2. Any command between 11h and 81h is prohibited except 70h/F1h and FFh.



READ STATUS

The device contains a Status Register which may be read to find out whether program or erase operation is completed, and whether the program or erase operation is completed successfully. After writing 70h/F1h command to the command register, a read cycle outputs the content of the Status Register to the I/O pins on the falling edge of CE or RE, whichever occurs last. This two line control allows the system to poll the progress of each device in multiple memory connections even when R/B pins are common-wired. RE or CE does not need to be toggled for updated status. Refer to Table 3 for specific Status Register definitions and Table 4 for specific F1h Status Register definitions. The command register remains in Status Read mode until further commands are issued to it. Therefore, if the status register is read during a random read cycle, the read command(00h) should be given before starting read cycles.

I/O	Page Program	Block Erase	Read	D	efinition
I/O 0	Pass/Fail	Pass/Fail	Not use	Pass : "0"	Fail : "1"
I/O 1	Not use	Not use	Not use	Don't -cared	
I/O 2	Not use	Not use	Not use	Don't -cared	
I/O 3	Not Use	Not Use	Not Use	Don't -cared	
I/O 4	Not Use	Not Use	Not Use	Don't -cared	
I/O 5	Not Use	Not Use	Not Use	Don't -cared	
I/O 6	Ready/Busy	Ready/Busy	Ready/Busy	Busy : "0"	Ready: "1"
I/O 7	Write Protect	Write Protect	Write Protect	Protected : "0"	Not Protected : "1"

NOTE : I/Os defined 'Not use' are recommended to be masked out when Read Status is being executed.

I/O No.	Page Program	Block Erase	Read	Definition		
I/O 0	Chip Pass/Fail	Chip Pass/Fail	Not use	Pass : "0"	Fail : "1"	
I/O 1	Plane0 Pass/Fail	Plane0 Pass/Fail	Not use	Pass : "0"	Fail : "1"	
I/O 2	Plane1 Pass/Fail	Plane1 Pass/Fail	Not use	Pass : "0"	Fail : "1"	
I/O 3	Not Use	Not Use	Not Use	Don't -cared		
I/O 4	Not Use	Not Use	Not Use	Don't -cared		
I/O 5	Not Use	Not Use	Not Use	Don't -cared		
I/O 6	Ready/Busy	Ready/Busy	Ready/Busy	Busy : "0"	Ready : "1"	
I/O 7	Write Protect	Write Protect	Write Protect	Protected : "0"	Not Protected : "1"	


Table 4. Read Status 2 Register Definition for F1h Command


NOTE : I/Os defined 'Not use' are recommended to be masked out when Read Status is being executed.



Read ID

The device contains a product identification mode, initiated by writing 90h to the command register, followed by an address input of 00h. Five read cycles sequentially output the manufacturer code(ECh), and the device code and 3rd, 4th, 5th cycle ID respectively. The command register remains in Read ID mode until further commands are issued to it. Figure 18 shows the operation sequence.



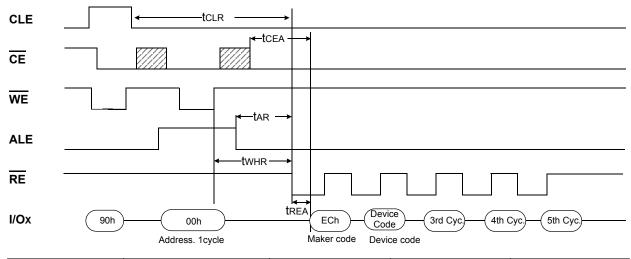

Device	Device Code (2nd Cycle)	3rd Cycle	4th Cycle	5th Cycle
K9F2G08B0B	Same as K9F2G08U0B			
K9F2G08U0B	DAh	10h	95h	44h

RESET

The device offers a reset feature, executed by writing FFh to the command register. When the device is in Busy state during random read, program or erase mode, the reset operation will abort these operations. The contents of memory cells being altered are no longer valid, as the data will be partially programmed or erased. The command register is cleared to wait for the next command, and the Status Register is cleared to value C0h when \overline{WP} is high. If the device is already in reset state a new reset command will be accepted by the command register. The R/B pin changes to low for tRST after the Reset command is written. Refer to Figure 19 below.

Figure 19. RESET Operation

R/B	trst +
I/Ox	FFh


Table 5. Device Status


	After Power-up	After Reset
Operation mode	00h Command is latched	Waiting for next command




READY/BUSY

The device has a R/B output that provides a hardware method of indicating the completion of a page program, erase and random read completion. The R/B pin is normally high but transitions to low after program or erase command is written to the command register or random read is started after address loading. It returns to high when the internal controller has finished the operation. The pin is an open-drain driver thereby allowing two or more R/B outputs to be Or-tied. Because pull-up resistor value is related to tr(R/B) and current drain during busy(ibusy), an appropriate value can be obtained with the following reference chart(Fig.19). Its value can be determined by the following guidance.

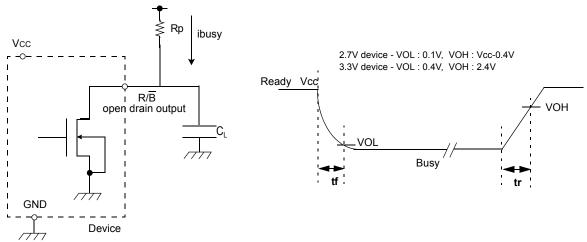



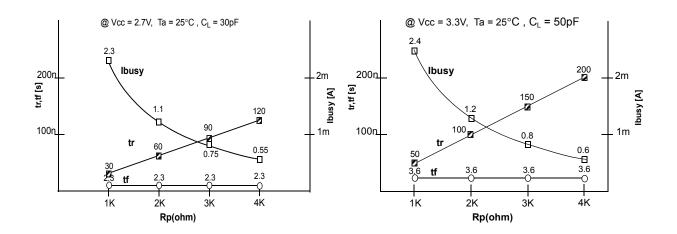

Rp value guidance

Rp(min, 2.7V part) =	Vcc(Max.) - VoL(Max.)	_	2.5V	
(min, 2.7 v part) -	Ιοι + ΣΙι	= -	3mA + Σl∟	
Rp(min, 3.3V part) =	Vcc(Max.) - VoL(Max.)	_	3.2V	
	ΙΟΓ + ΣΙΓ		8mA + Σl∟	


where IL is the sum of the input currents of all devices tied to the R/\overline{B} pin. Rp(max) is determined by maximum permissible limit of tr



Data Protection & Power up sequence

The device is designed to offer protection from any involuntary program/erase during power-transitions. An internal voltage detector disables all functions whenever Vcc is below about 1.8V(2.7V device), 2V(3.3V device). WP pin provides hardware protection and is recommended to be kept at VL during power-up and power-down. A recovery time of minimum 100 μ s is required before internal circuit gets ready for any command sequences as shown in Figure 20. The two step command sequence for program/erase provides additional software protection.



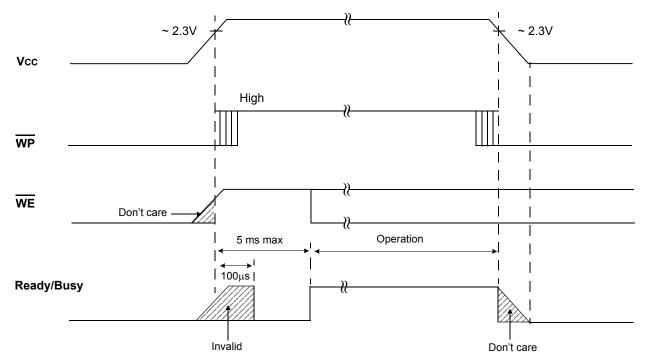

Note :During the initialization, the device consumes a maximum current of 30mA (ICC1)

