

1 W L-BAND POWER GaAs MES FET**DESCRIPTION**

The NE6500179A is a 1 W GaAs MES FET designed for middle power transmitter applications for mobile communication handset and base station systems. It is capable of delivering 1 W of output power (CW) with high linear gain, high efficiency and excellent distortion.

Reliability and performance uniformity are assured by NEC's stringent quality and control procedures.

FEATURES

- High output power: $P_{O(1\text{ dB})} = 30.0\text{ dBm TYP.}$
- High linear gain: $G_L = 12.0\text{ dB TYP.}$
- High power added efficiency: $\eta_{add} = 50\% \text{ TYP. @ } V_{DS} = 6.0\text{ V, } I_{Dset} = 200\text{ mA, } f = 1.9\text{ GHz}$

ORDERING INFORMATION

Part Number	Package	Supplying Form
NE6500179A-T1	79A	<ul style="list-style-type: none">• 12 mm wide embossed taping• Qty 1 kpcs/reel

Remark To order evaluation samples, consult your NEC sales representative
(Part number for sample order: NE6500179A).

Caution Please handle this device at static-free workstation, because this is an electrostatic sensitive device.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

ABSOLUTE MAXIMUM RATINGS (T_A = +25 °C)

Operation in excess of any one of these parameters may result in permanent damage.

Parameter	Symbol	Ratings	Unit
Drain to Source Voltage	V _{DS}	15	V
Gate to Source Voltage	V _{GSO}	−7	V
Drain Current	I _D	2.5	A
Gate Forward Current	I _{GF}	20	mA
Gate Reverse Current	I _{GR}	20	mA
Total Power Dissipation	P _{tot}	7	W
Channel Temperature	T _{ch}	150	°C
Storage Temperature	T _{stg}	−65 to +150	°C

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Drain to Source Voltage	V _{DS}		−	6.0	6.0	V
Gain Compression	G _{comp}		−	−	3.0	dB
Channel Temperature	T _{ch}		−	−	+125	°C

ELECTRICAL CHARACTERISTICS


(T_A = +25 °C, unless otherwise specified, using NEC standard test fixture.)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Saturated Drain Current	I _{DSS}	V _{DS} = 2.5 V, V _{GS} = 0 V	−	1.8	−	A
Pinch-off Voltage	V _p	V _{DS} = 2.5 V, I _D = 10 mA	−3.6	−	−1.6	V
Gate to Drain Break Down Voltage	BV _{gd}	I _{gd} = 10 mA	15	−	−	V
Thermal Resistance	R _{th}	Channel to Case	−	15	−	°C/W
Gain 1 dB Compression Output Power	P _{O (1 dB)}	f = 1.9 GHz, V _{DS} = 6.0 V, R _g = 30 Ω, I _{Dset} = 200 mA (RF OFF) Note 2	−	30.0	−	dBm
Drain Current	I _D		−	340	−	mA
Power Added Efficiency	η _{add}		−	50	−	%
Linear Gain ^{Note 1}	G _L		11.0	12.0	−	dB

Notes 1. P_{in} = 0 dBm

2. DC performance is 100 % testing. RF performance is testing several samples per wafer.
Wafer rejection criteria for standard devices is 1 reject for several samples.

TYPICAL CHARACTERISTICS ($T_A = +25\text{ }^{\circ}\text{C}$)

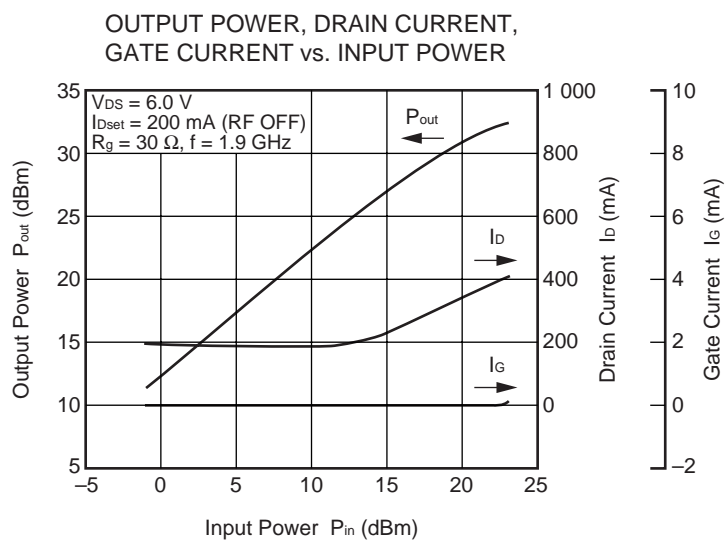


Remark The graph indicates nominal characteristics.

S-PARAMETERSTest Conditions: $V_{DS} = 6.0\text{ V}$, $I_{Dset} = 200\text{ mA}$ (RF OFF)

Frequency MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)	MAG.	ANG. (deg.)
500	0.895	-145.1	6.305	96.12	0.037	18.49	0.595	-172.3
600	0.890	-152.4	5.356	91.79	0.037	15.64	0.601	-175.2
700	0.886	-158.2	4.684	87.59	0.038	13.66	0.607	-177.3
800	0.884	-163.0	4.157	84.18	0.038	11.83	0.608	-179.2
900	0.881	-167.0	3.708	81.06	0.039	10.32	0.609	178.9
1000	0.879	-170.4	3.381	78.08	0.039	9.36	0.610	177.3
1100	0.879	-173.4	3.105	75.16	0.039	8.22	0.609	175.8
1200	0.879	-176.4	2.880	72.51	0.040	6.99	0.609	174.3
1300	0.877	-179.1	2.681	69.60	0.040	5.95	0.607	172.7
1400	0.876	178.3	2.518	66.85	0.041	5.24	0.607	171.1
1500	0.876	175.7	2.368	64.05	0.041	4.31	0.606	169.4
1600	0.876	173.0	2.237	61.40	0.041	3.11	0.606	167.9
1700	0.877	170.4	2.122	58.60	0.042	1.97	0.604	166.2
1800	0.875	167.7	2.021	55.76	0.042	1.23	0.603	164.6
1900	0.876	165.0	1.927	52.81	0.043	0.05	0.601	162.7
2000	0.875	162.5	1.842	49.91	0.042	-0.66	0.600	160.6
2100	0.876	159.9	1.765	47.10	0.043	-2.19	0.600	158.5
2200	0.875	157.2	1.691	44.16	0.043	-3.00	0.600	156.4
2300	0.875	154.6	1.620	41.13	0.043	-4.19	0.600	154.3
2400	0.875	151.9	1.552	38.07	0.043	-5.43	0.601	152.0
2500	0.876	149.3	1.489	35.13	0.043	-6.55	0.603	149.7
2600	0.876	146.7	1.429	32.08	0.043	-8.05	0.603	147.3
2700	0.877	144.0	1.366	29.08	0.043	-9.20	0.606	144.9
2800	0.876	141.6	1.305	26.27	0.043	-10.15	0.610	142.6
2900	0.875	139.5	1.247	23.72	0.042	-11.98	0.613	140.7
3000	0.880	137.1	1.203	20.91	0.042	-12.74	0.620	138.2

PACKAGE DIMENSIONS

79A (UNIT: mm)

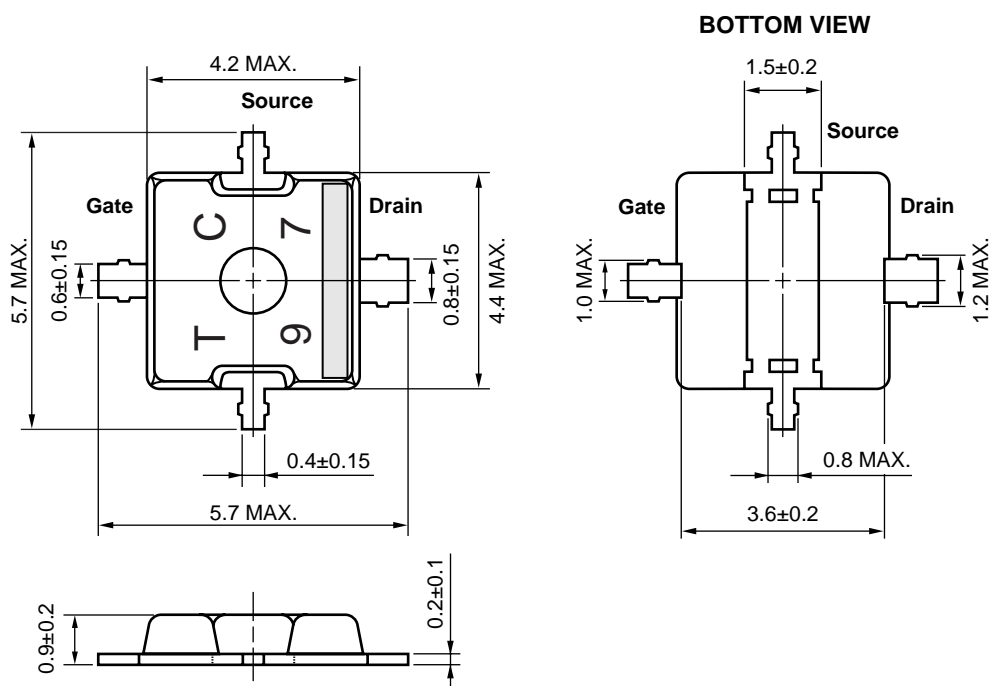

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your NEC sales representative.

Soldering Method	Soldering Conditions	Recommended Condition Symbol
Infrared Reflow	Package peak temperature: 235 °C or below, Time: 30 seconds or less (at 210 °C or higher), Count: 2 times or less, Exposure: limit: None ^{Note}	IR35-00-2
Partial Heating	Pin temperature: 260 °C or below, Time: 5 seconds or less (per pin row) Exposure: limit: None ^{Note}	—

Note After opening the dry pack, store it at 25 °C or less and 65 % RH or less for the allowable storage period.

Caution Do not use different soldering methods together (except for partial heating).

[MEMO]

CAUTION

The great care must be taken in dealing with the devices in this guide.

The reason is that the material of the devices is GaAs (Gallium Arsenide), which is designated as harmful substance according to the law concerned.

Keep the law concerned and so on, especially in case of removal.

- **The information in this document is current as of September, 2000. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
 The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
 (Note)
 (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
 (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).