


Mini-Change® 9/10/12 Pole Plugs and Cable Assemblies


Product Specifications

MECHANICAL MOLDED BODY MATERIAL: CONTACT MATERIAL: CONTACT PLATING: COUPLING NUT MATERIAL: CABLE TYPE(S): CABLE STRANDING: CABLE DIAMETER: CABLE STRAIN RELIEF:	PVC, FLAMMABILITY RATING FT2 BRASS GOLD - 5µ IN. (MIN) PALLADIUM/NICKEL - 20µ IN. (MIN) ZINC DIECAST EPOXY-COAT (ALSO AVAILABLE IN STAINLESS STEEL OR NON-METALLIC) 16 AWG: PVC INSULATED, STRANDED COPPER CONDUCTORS, YELLOW PVC JACKETED, 600V, 105°C, UL RECOGNIZED STOOW-A, CSA CERTIFIED ST (SEE CABLE MATRIX ON PAGE 132 FOR OTHER AVAILABLE CABLE TYPES) 65 X #34 9/C - .64" 10/C - .66" 12/C - .71" 35 POUNDS MIN. - PER UL STD. 514	ELECTRICAL VOLTAGE RATING: CONTACT RESISTANCE: ISOLATION RESISTANCE: ENVIRONMENTAL PROTECTION: AMBIENT OPERATING TEMP: CORROSION RESISTANCE: VIBRATION RESISTANCE: HIGH PRESSURE WATER SPRAY: CERTIFICATIONS UL: CSA: VDE:	600VAC/600VDC ≤5mΩ, (AFTER 100 MATE/UNMATE CYCLES - PER MIL STD. 1344, 3004.1) ≥1000MΩ IP 68, NEMA 6P - PER NEMA STD. 250 -20° TO +105°C 500 HOUR SALT SPRAY - PER MIL STD. 202F 10 - 500 HZ @ 10g - PER MIL STD. 202F, 204D, CONDITION A 1000 PSI UL RECOGNIZED, FILE NO. E46237 CSA CERTIFIED, FILE NO. LR6837 SPACINGS TO VDE 0110 GROUP C (250VAC/300VDC)
--	---	--	--


Male Straight Plug

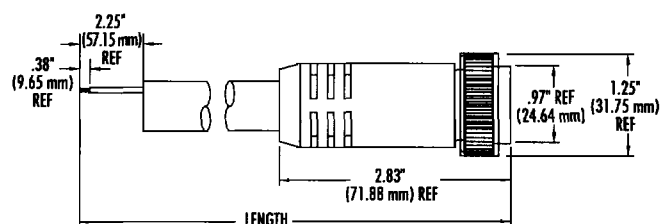


Male 90° Plug

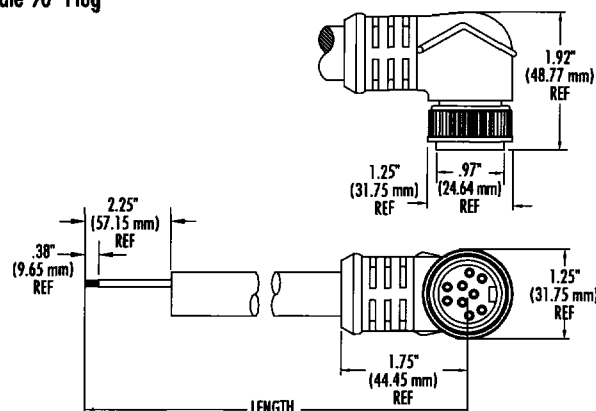

Female Straight Plug

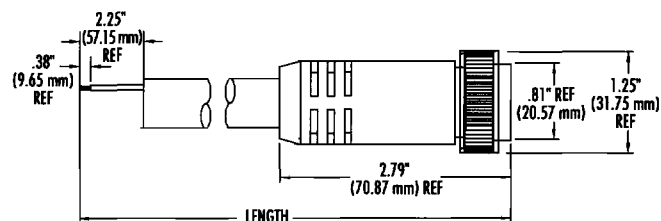


Female 90° Plug

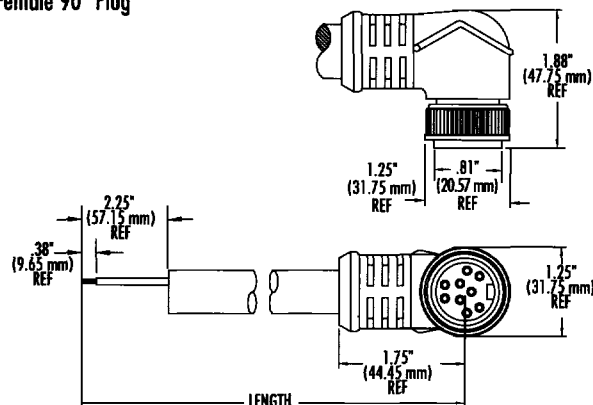

Mini-Change® 9/10/12 Pole Plugs and Cable Assemblies

Male/Female Cable Assembly

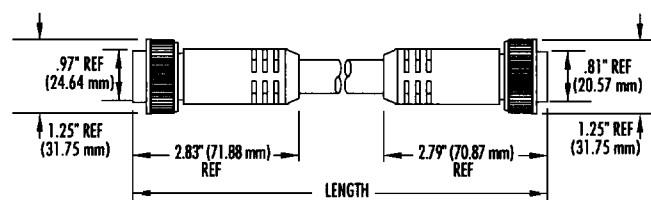

PLUGS AND CABLE ASSEMBLIES WITH #16 AWG STOOW-A CABLE

POLES	FACE VIEW MALE	WIRING CODE	CURRENT RATING 600V	CABLE LENGTH ft/meters	MALE STRAIGHT	MALE 90°	FEMALE STRAIGHT	FEMALE 90°	MALE/FEMALE CABLE ASSEMBLY
9		1-ORANGE 2-BLUE 3-RED-BLK. TR. 4-GREEN-BLK. TR. 5-WHITE 6-RED 7-GREEN 8-WHITE-BLK. TR. 9-BLACK	7A	3ft/.91m	47008	47008-90	47001	47001-90	47029
				6ft/1.83m	47009	47009-90	47002	47002-90	47051
				12ft/3.66m	47010	47010-90	47003	47003-90	47052
				20ft/6.10m	47057	47057-90	47043	47043-90	47025
10		1-ORANGE 2-BLUE 3-WHITE-BLK. TR. 4-RED-BLK. TR. 5-GREEN-BLK. TR. 6-ORANGE-BLK. TR. 7-RED 8-GREEN 9-BLACK 10-WHITE	7A	3ft/.91m	47208	47208-90	47201	47201-90	47253
				6ft/1.83m	47209	47209-90	47202	47202-90	47224
				12ft/3.66m	47210	47210-90	47203	47203-90	47250
				20ft/6.10m	47235	47235-90	47239	47239-90	47212
12		1-ORANGE 2-BLUE 3-WHITE-BLK. TR. 4-RED-BLK. TR. 5-GREEN-BLK. TR. 6-ORANGE-BLK. TR. 7-BLUE-BLK. TR. 8-BLACK-WHT. TR. 9-GREEN 10-RED 11-WHITE 12-BLACK	5A	3ft/.91m	47408	47408-90	47401	47401-90	47479
				6ft/1.83m	47409	47409-90	47402	47402-90	47413
				12ft/3.66m	47410	47410-90	47403	47403-90	47446
				20ft/6.10m	47425	47425-90	47449	47449-90	47424

PRODUCT OPTIONS

1. For Stainless Steel Coupling Nut: add "SS" to catalog number. e.g. 47008 becomes 47008SS.
2. For Max-Loc Cord Grip bodies: see ordering information on page 33.