





A/D ELECTRONICS, INC.




ADS-102

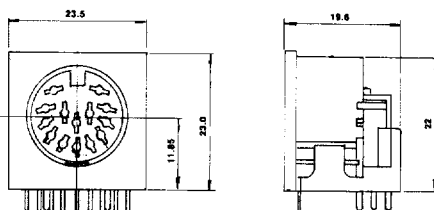


14P DIN SOCKET:

Insulation Resistance: 100M Ω at 500V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 1A
12 V D.C. 2A




ADS-103

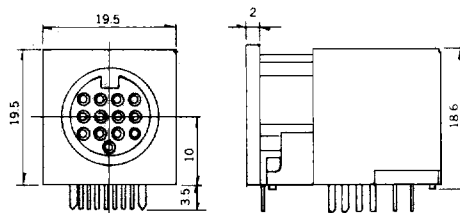


13P DIN SOCKET WITH SWITCH:

Rating: AC 100V 1A
DC 12V 2A
Contact Resistance: 30m Ω MAX.
Insulation Resistance: 100M Ω MIN.
at 500V D.C.
Voltage withstand: 500V AC
for 1 minute




ADS-104 (4P 210°)

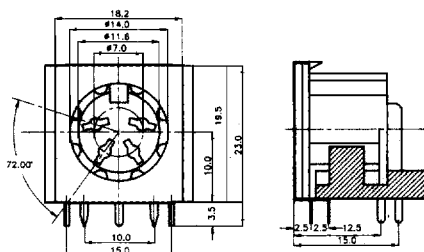


4P DIN SOCKET WITH SHIELDED:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A



ADS-105 (5P 180°)

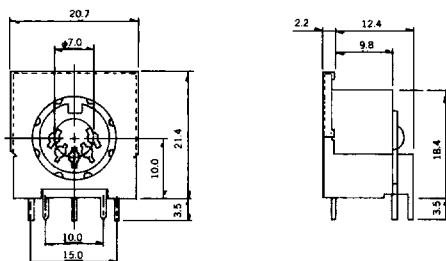

5P DIN SOCKET WITH SHIELDED:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A