



COIL DATA:

MODEL BR24D PART NUMBER	BR24D-85() ⁽¹⁾ -12V	BR24D-300() ⁽¹⁾ -26V	BR24D-400() ⁽¹⁾ -26V
NOMINAL COIL VOLTAGE	12 VDC	26 VDC	26 VDC
MAXIMUM COIL VOLTAGE	14.8 VDC	32 VDC	32 VDC
PULL IN VOLTAGE (MAX @ +125°C)	8.3 VDC	18 VDC	18 VDC
PULL IN VOLTAGE (MAX)	6.4 VDC	14 VDC	14 VDC
DROP OUT VOLTAGE (MIN)	0.6 VDC	1.3 VDC	1.3 VDC
COIL RESISTANCE ± 10% @ 25°C	85 OHMS	300 OHMS	400 OHMS

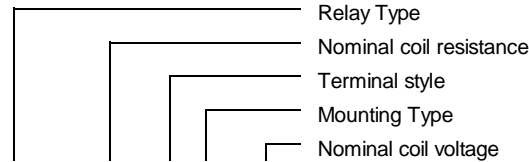


BR24D - 400 A 1 - 26V


SCHEMATIC TERMINAL VIEWS



TERMINAL STYLES

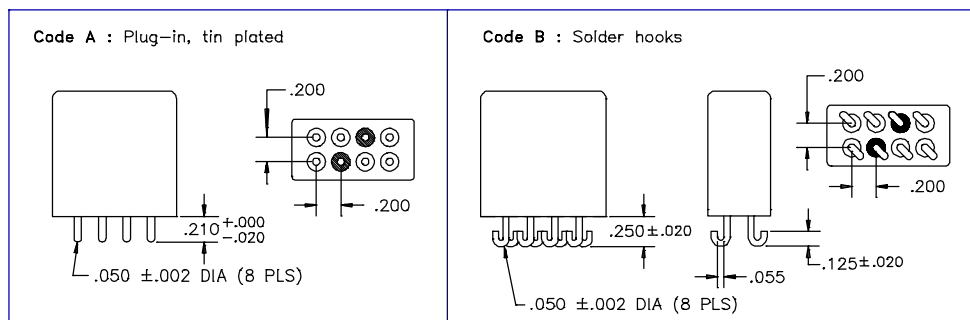

MOUNTING CODES

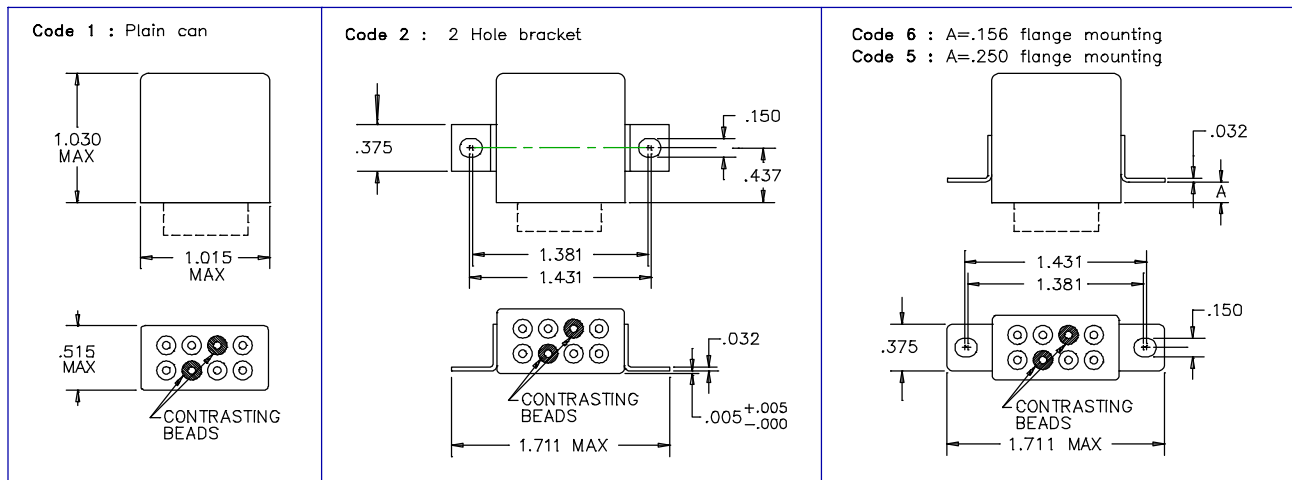

GENERAL NOTES

- Unless otherwise specified, all tests made at nominal coil voltages, @ 25°C.
- For special coil variations, switching configurations, terminals styles and mounting types, consult the factory.
- Unless otherwise specified, tolerances on decimal dimensions are ± .010".
- Specifications contained herein are subject to change without notice.