

### Typical Applications


The HMC194MS8 /HMC194MS8E is ideal for:

- Cellular/PCS Base Stations
- Portable Wireless
- MMDS & WirelessLAN

### Features

- Ultra Small Package: MSOP8
- High Isolation: 50 dB
- Positive Control: 0/+3V to 0/+7V

### Functional Diagram

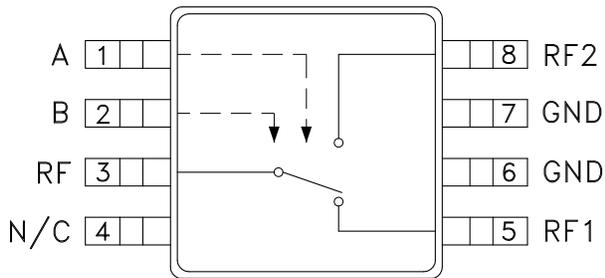

### General Description

The HMC194MS8 & HMC194MS8E are low-cost SPDT switches in 8-lead MSOP packages for use in applications which require high isolation between two RF paths. The devices can control signals from DC to 3 GHz and have been optimized to provide extremely high isolation with minimal insertion loss in medium and low power applications. On chip circuitry allows positive voltage control operation at very low DC currents with control inputs compatible with CMOS and most TTL logic families. RF1 and RF2 are reflective opens when "OFF".


### Electrical Specifications, $T_A = +25^\circ \text{C}$ , $V_{ctl} = 0/+5 \text{Vdc}$ , 50 Ohm System

Parameter	Frequency	Min.	Typ.	Max.	Units
Insertion Loss	DC - 2.0 GHz		0.7	0.9	dB
	DC - 2.5 GHz		0.8	1.0	dB
	DC - 3.0 GHz		0.8	1.1	dB
Isolation	RF1 / RF2	DC - 1.0 GHz	48 / 50	52 / 54	dB
	RF1 / RF2	DC - 2.0 GHz	40 / 42	44 / 46	dB
		DC - 2.5 GHz	31	35	dB
		DC - 3.0 GHz	24	28	dB
Return Loss	DC - 2.0 GHz		24		dB
	DC - 2.5 GHz		22		dB
Input Power for 1 dB Compression 0/+5V Control	0.5 - 3.0 GHz	24	28		dBm
Input Third Order Intercept (Two-tone Input Power = +7 dBm Each Tone)	0/+5V Control	49	53		dBm
Switching Characteristics	DC - 3.0 GHz		tRISE, tFALL (10/90% RF)	10	ns
			tON, tOFF (50% CTL to 10/90% RF)	24	ns




## GaAs MMIC SPDT SWITCH DC - 3 GHz


### Insertion Loss

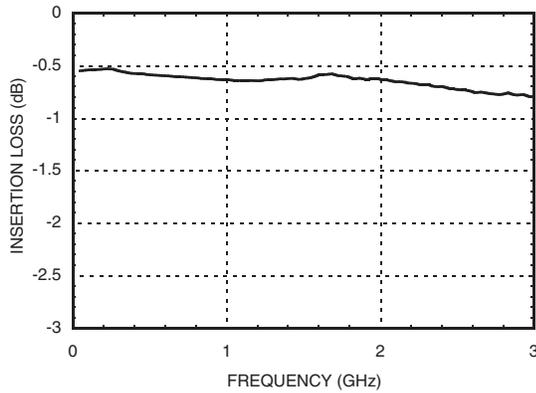


### Isolation

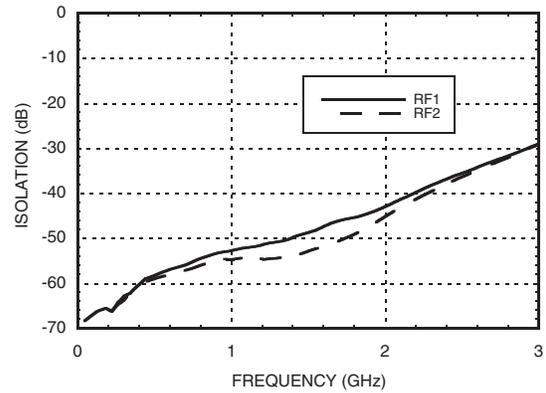


### Return Loss

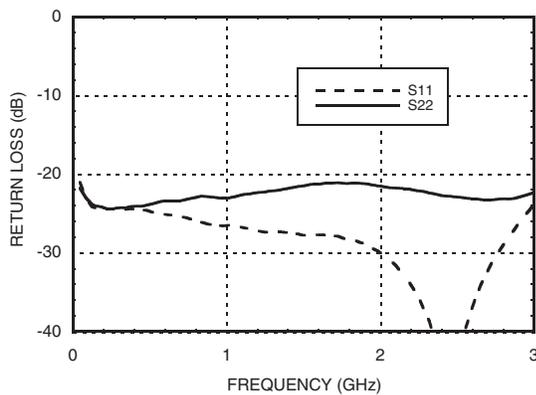

### Input 0.1 and 1.0 dB Compression vs. Control Voltage

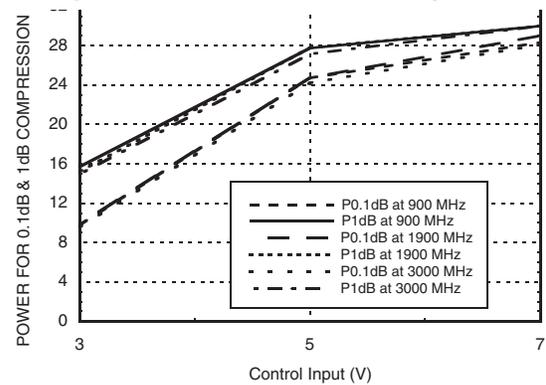

### Input Third Order Intercept Point vs. Control Voltage

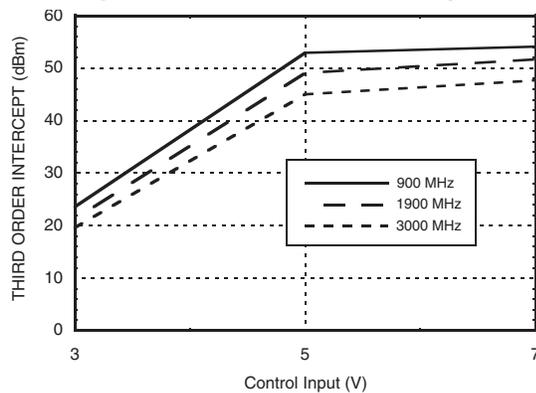

### Truth Table

\*Control Input Voltage Tolerances are  $\pm 0.2$  Vdc.

Control Input*		Control Current		Signal Path State	
A (Vdc)	B (Vdc)	Ia ( $\mu$ A)	Ib ( $\mu$ A)	RF to RF1	RF to RF2
0	+3	-0.05	+0.05	ON	OFF
+3	0	+0.05	-0.05	OFF	ON
0	+5	-2	+2	ON	OFF
+5	0	+2	-2	OFF	ON
0	+7	-15	+15	ON	OFF
+7	0	+15	-15	OFF	ON

### Absolute Maximum Ratings


RF Input Power (Vctl= 0V/+5V)	+27 dBm
Control Voltage Range (A & B)	-0.2 to +7.5 Vdc
Hot Switch Power Level (Vctl= 0V/+5V)	+24 dBm
Channel Temperature	150 °C
Continuous Pdiss (T= 85 °C) (derate 5.5 mW/°C above 85 °C)	360 mW
Thermal Resistance	180 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1B



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

Note: DC blocking capacitors are required at ports RFC, RF1 and RF2. Their value will determine the lowest transmission frequency.

### Outline Drawing

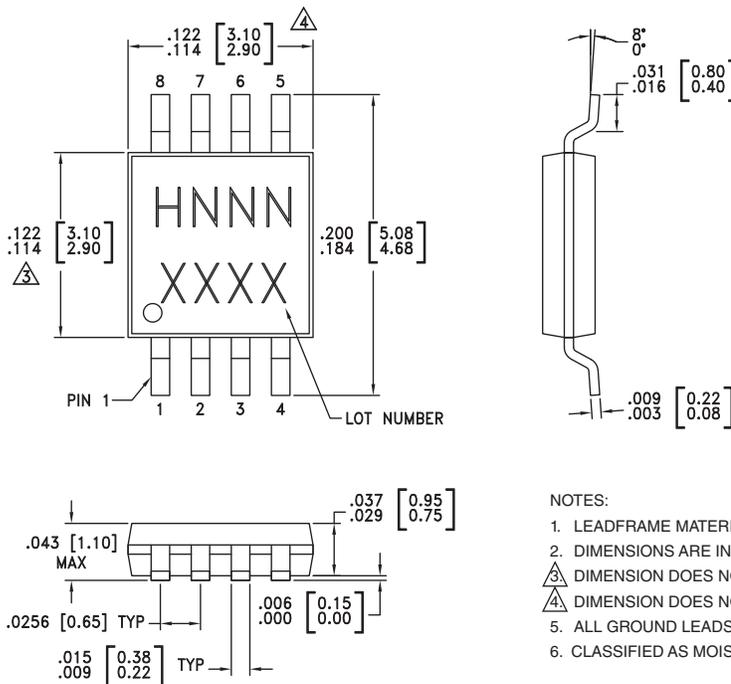

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[3]</sup>
HMC194MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 <sup>[1]</sup>	H194 XXXX
HMC194MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H194 XXXX


[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX



## Typical Application Circuit

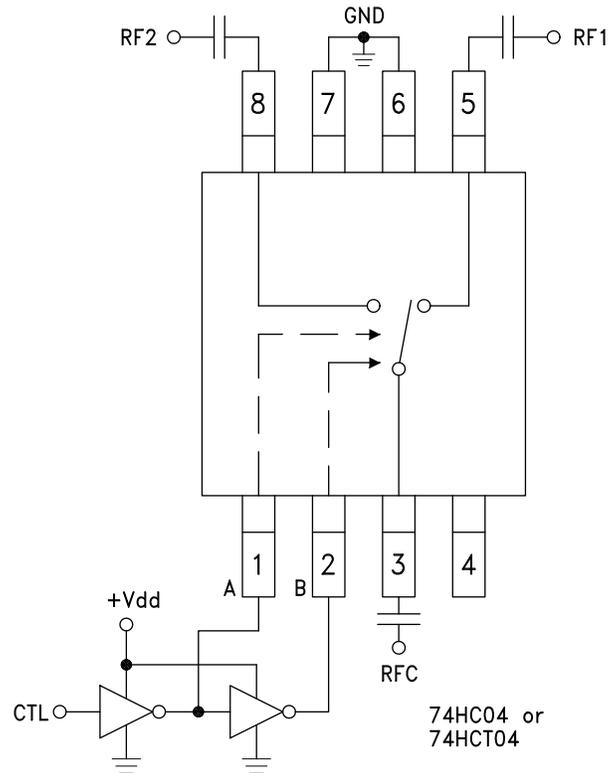


### Notes:

1. Set logic gate and switch Vdd = +3V to +5V and use HCT series logic to provide a TTL driver interface.
2. Control inputs A/B can be driven directly with CMOS logic (HC) with Vdd of 3 to 7 Volts applied to the CMOS logic gates.
3. DC Blocking capacitors are required for each RF port as shown. Capacitor value determines lowest frequency of operation.
4. Highest RF signal power capability is achieved with Control set to 0/+7V.



## Evaluation Circuit Board

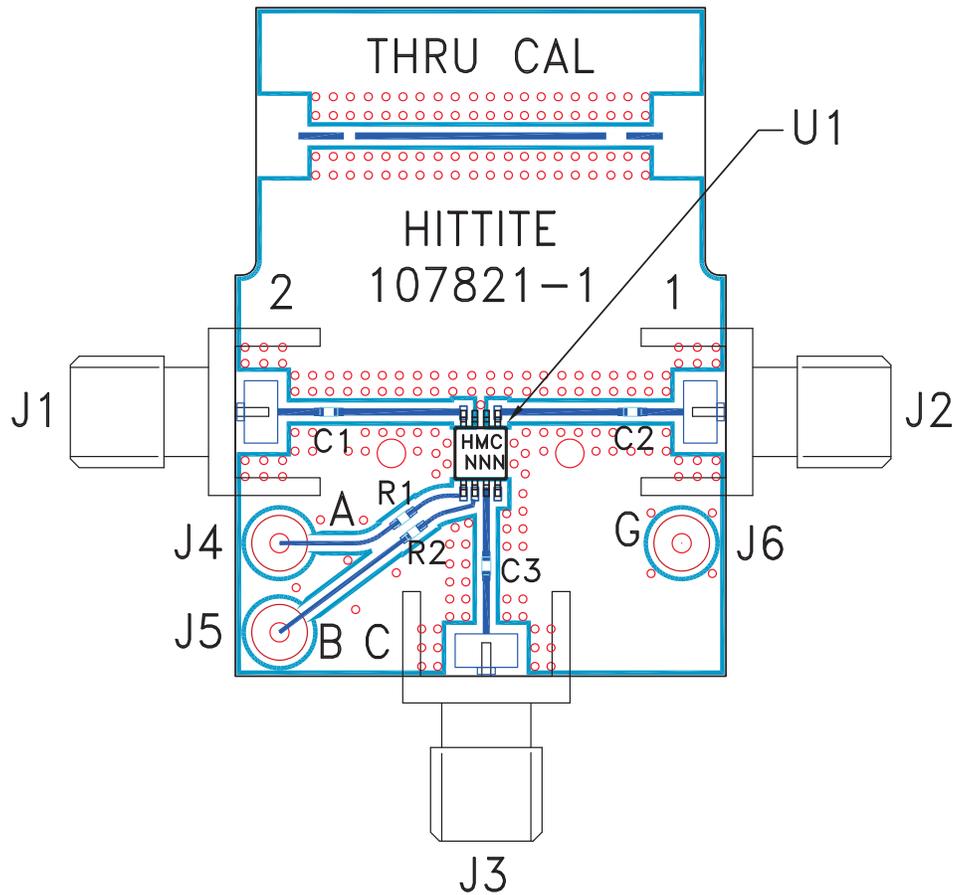

### List of Materials for Evaluation PCB 105143 [1]

Item	Description
J1 - J3	PC Mount SMA RF Connector
J4 - J6	DC Pin
C1 - C3	100 pF capacitor, 0402 Pkg.
R1, R2	100 Ω resistor, 0402 Pkg.
U1	HMC194MS8 / HMC194MS8E SPDT Switch
PCB [2]	107821 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



## Notes



[Home](#) » HMC194MS8

### HMC194MS8 - SPDT Hi Isolation Switch SMT, DC - 3 GHz

Click here to review the [HMC194MS8](#) product data sheet in PDF format.

Part Number	RoHS	Description	ECCN	Unit price	QTY
HMC194MS8	No	SPDT Hi Isolation Switch SMT, DC - 3 GHz	EAR99	\$2.78 ea	
HMC194MS8E	Yes	SPDT Hi Isolation Switch SMT, DC - 3 GHz	EAR99	\$2.14 ea	
HMC194MS8ETR	Yes	SPDT Hi Isolation Switch SMT, DC - 3 GHz 500 Piece Reel	EAR99	\$975.00 ea	
HMC194MS8TR	No	SPDT Hi Isolation Switch SMT, DC - 3 GHz 500 Piece Reel	EAR99	\$1265.00 ea	
105143-HMC194MS8	No	HMC194MS8 Evaluation PCB	EAR99	\$226.00 ea	

#### When Ordering Please Note:

- Enter bulk Die and SMT IC quantities in multiples of 10 pieces.
- For Evaluation PCBs, Reels & Designer's Kits enter any quantity.
- Pricing is initially shown for the 10-99 piece price break. Orders for quantities within the 100-999 and 1,000-9,999 piece price breaks will be properly calculated when the "Click to Order" button is selected.
- Contact Hittite Sales for pricing of quantities 10,000 or greater.
- Reels: Pricing shown for single 7" reel = 500 piece price break. Orders for 2 or more reels will reflect the 1000 piece price break. Hittite reserves the right to ship 13" reels of 2500 pieces for orders = 2500 pieces.
- Price for "Evaluation PCB" includes mounted and tested IC product.
- The "E" suffix indicates RoHS Compliant Product for plastic packaged products.
- Hittite may substitute RoHS compliant units when non-RoHS compliant units are ordered and factory stock is depleted. If this will not be acceptable please contact Hittite Sales directly to arrange the sale of non-RoHS compliant product; 978-250-3343 or [sales@hittite.com](mailto:sales@hittite.com).
- ECCN (Export Commodity Control Number): These commodities may only be exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to United States law is prohibited. United States law prohibits disposition of these commodities to Iran, North Korea, Cuba, Syria and Sudan.

**Your order will be confirmed within one business day with delivery information.**  
**If you have any questions, please call (978) 250-3343 or email to [ecomm@hittite.com](mailto:ecomm@hittite.com).**

[» Continue Shopping](#)

[» Click to Order](#)

Hittite Microwave (Chelmsford, MA USA) is an [ISO 9001:2000](#) and [AS9100 B](#) Certified Designer and Manufacturer  
 978-250-3343 | [sales@hittite.com](mailto:sales@hittite.com) | 2000 - 2011 Hittite Microwave Corporation | [Legal Notice](#) | [Privacy Policy](#)