

DESCRIPTION


M81711FP is a dual inverter type general purpose driver by 24V rating voltage.

FEATURES

- RATING VOLTAGE 24V
- OUTPUT CURRENT +0.8A, -0.6A
- POWER-SUPPLY RANGE OF OPERATION ... 4.5V ~ 24V
(RECOMMENDATION POWER SUPPLY RANGE : 4.5V ~ 17 V)
- HIGH-SPEED SWITCHING TIME
(22ns typ, CL = 1000pF)
- DUAL INVERTER
- TTL/CMOS Compatibl
(VIH = 2.8V or more, at VDD = 4.5V ~ 9V)
(VIH = 4.4V or more, at VDD = 4.5V ~ 15V)
- SOP-8 PACKAGE




APPLICATIONS

PDP electrical discharge maintenance drive, motor drive, switching power supply, DC/DC converter and general purpose driver.

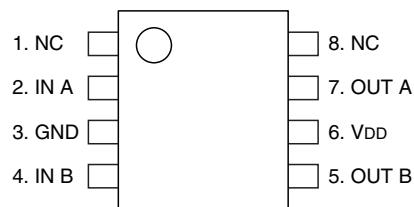PIN CONFIGURATION (TOP VIEW)

NC: NO CONNECTION

Outline:8P2S

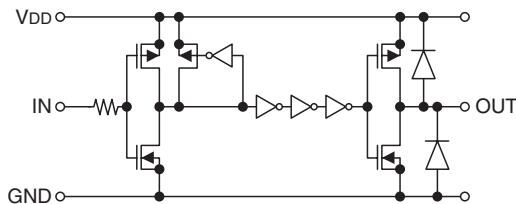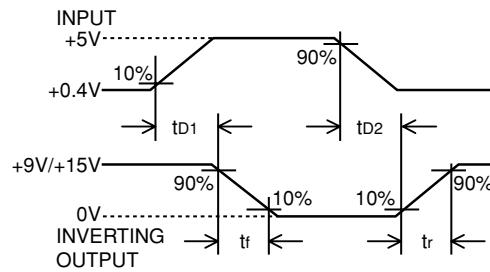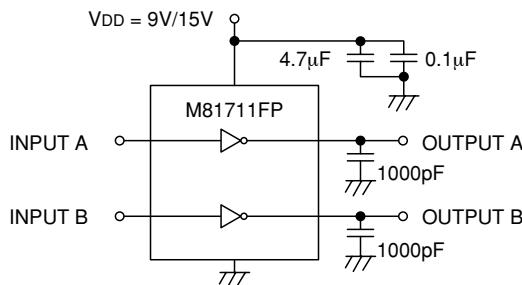BLOCK DIAGRAM**SWITCHING TIME EXAMINATION CIRCUIT DIAGRAM**

※ INPUT
RISE AND FALL
TIMES = 5ns

GENERAL PURPOSE DRIVER

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise specified)


Symbol	Parameter	Test conditions	Ratings			Unit
			Min.	Typ.	Max.	
VDD	Supply Voltage	VDD Terminal	0	—	24	V
VIN	Logic Input Voltage	IN A/B Terminal	GND–0.3	—	VDD+0.3	V
Pd	Package Power Dissipation	VDD, OUT A/B Terminal	—	0.5	—	W
Tj	Junction Temperature		–40	—	125	°C
Tstg	Storage Temperature		–40	—	125	°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
VDD	Supply Voltage	VDD Terminal	4.5	—	17	V
VIN	Logic Input Voltage	IN A/B Terminal	GND	—	VDD	V
Topr	Operation Temperature		–40	—	100	°C

* For proper operation, the device should be used within the recommended conditions.

THERMAL DERATING FACTOR CHARACTERISTIC (MAXIMUM RATING)

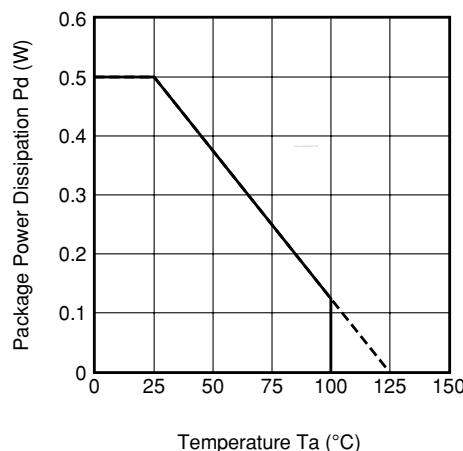

GENERAL PURPOSE DRIVER

ELECTRICAL CHARACTERISTICS (AC characteristic ; VIN = 0V, 5V)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
tr	Turn-On Rise Time	VDD = 15V, CL = 1000pF	—	35	70	ns
		VDD = 9V, CL = 1000pF	—	40	80	ns
tf	Turn-Off Fall Time	VDD = 15V, CL = 1000pF	—	25	50	ns
		VDD = 9V, CL = 1000pF	—	30	60	ns
tD1	Delay Time1	VDD = 15V, CL = 1000pF	—	22	45	ns
		VDD = 9V, CL = 1000pF	—	25	50	ns
tD2	Delay Time2	VDD = 15V, CL = 1000pF	—	22	45	ns
		VDD = 9V, CL = 1000pF	—	25	50	ns

* Typ. is not specified.

ELECTRICAL CHARACTERISTICS (DC characteristic ; VDD = 4.5V ~ 17V)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.*	Max.	
VIH	High Level Input Threshold Voltage	VDD = 15V	4.4	—	—	V
		VDD = 9V	2.8	—	—	V
VIL	Low Level Input Threshold Voltage	VDD = 15V	—	—	1.8	V
		VDD = 9V	—	—	1.0	V
IIN	Input Bias Current	VIN = 0V or VDD	-1	—	1	μA
VOH	High Level Output Voltage	IO = 0A	VDD-0.1	—	—	V
VOL	Low Level Output Voltage	IO = 0A	—	—	0.1	V
Isupp	VDD Supply Current	VDD = 15V	VIN = 5V (both inputs)	—	4.0	mA
		VDD = 15V	VIN = 0V (both inputs)	—	—	0.5 mA
		VDD = 9V	VIN = 3V (both inputs)	—	1.0	mA
		VDD = 9V	VIN = 0V (both inputs)	—	—	0.2 mA
IOH	Output High Level Short Circuit Pulsed Current	VDD = 15V, PW ≤ 10μs, VOUT = 0V	0.80	1.00	—	A
		VDD = 9V, PW ≤ 10μs, VOUT = 0V	0.38	0.45	—	A
IOL	Output Low Level Short Circuit Pulsed Current	VDD = 15V, PW ≤ 10μs, VOUT = 15V	0.60	0.80	—	A
		VDD = 9V, PW ≤ 10μs, VOUT = 9V	0.34	0.40	—	A
ROUT	Output On Resistance	VDD = 15V	Iload = 10mA, VOUT = "H"	—	7	Ω
			Iload = 10mA, VOUT = "L"	—	6	Ω
		VDD = 9V	Iload = 10mA, VOUT = "H"	—	9	Ω
			Iload = 10mA, VOUT = "L"	—	7	Ω







* Typ. is not specified.

PW : Input Pulse Wide







Iload : Supply input-and-output current to the OUT A/B terminal

GENERAL PURPOSE DRIVER

PERFORMANCE CURVES

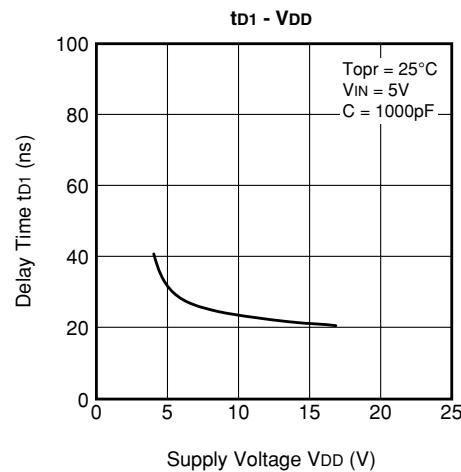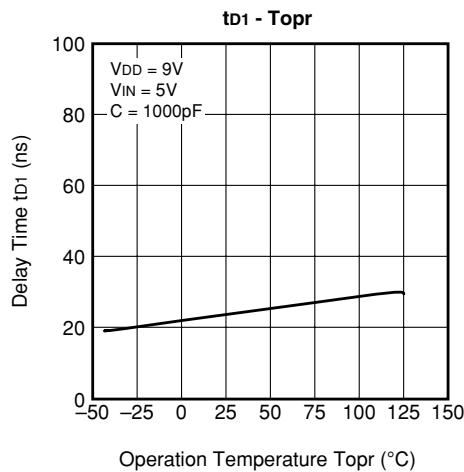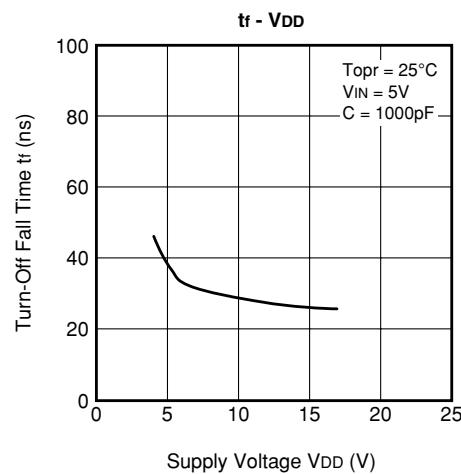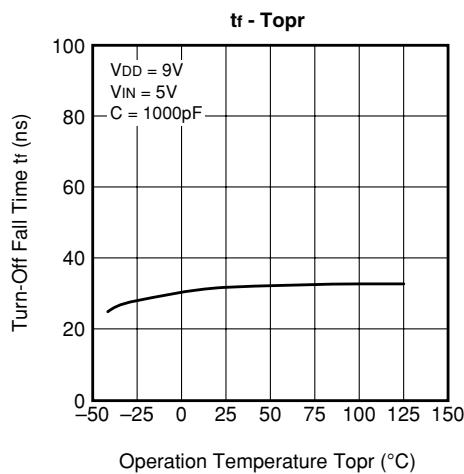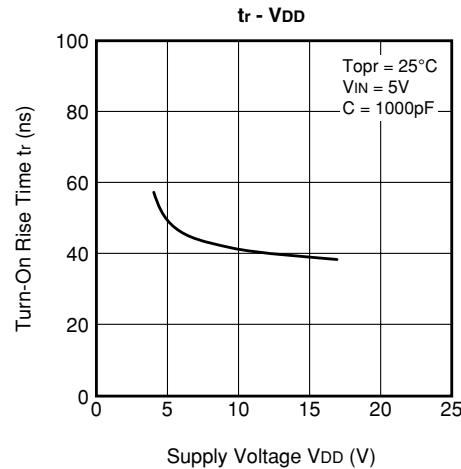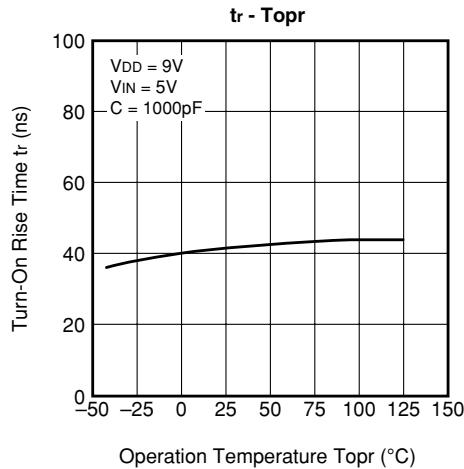

GENERAL PURPOSE DRIVER

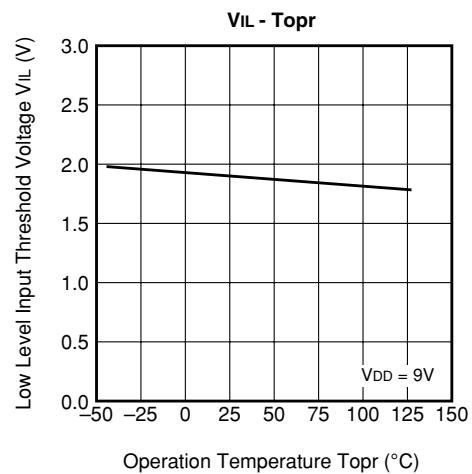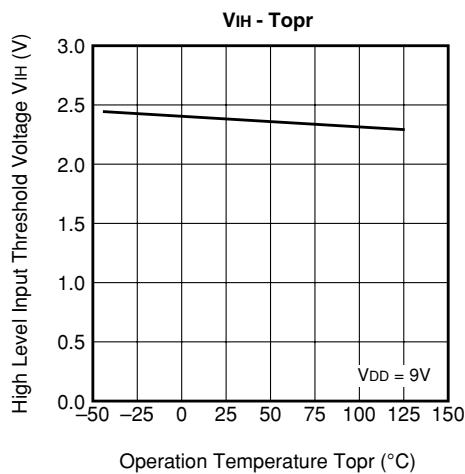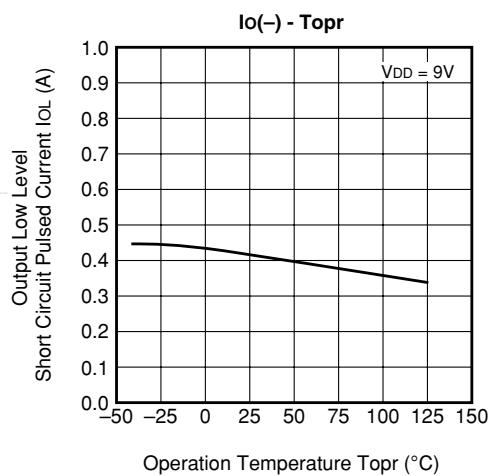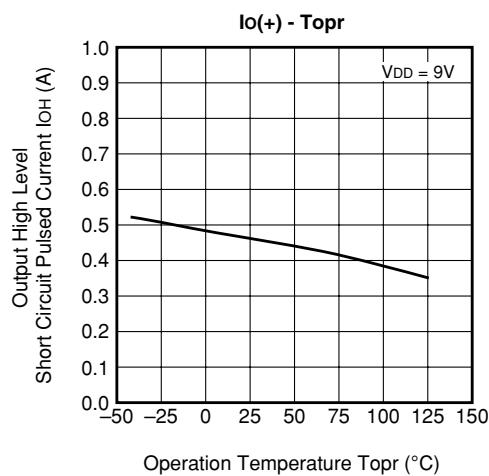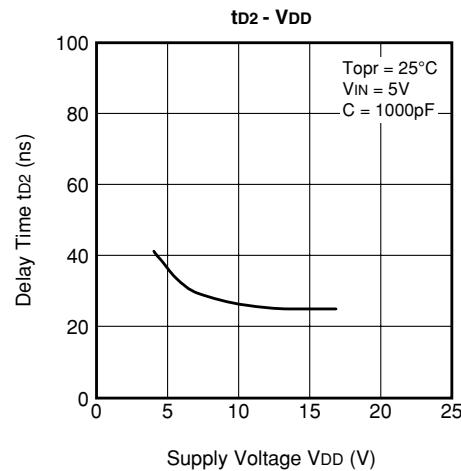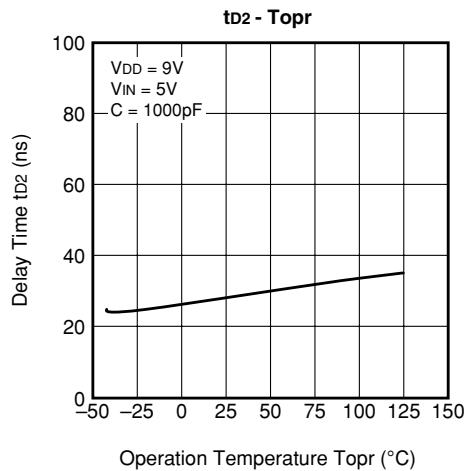

GENERAL PURPOSE DRIVER

PACKAGE OUTLINE

