
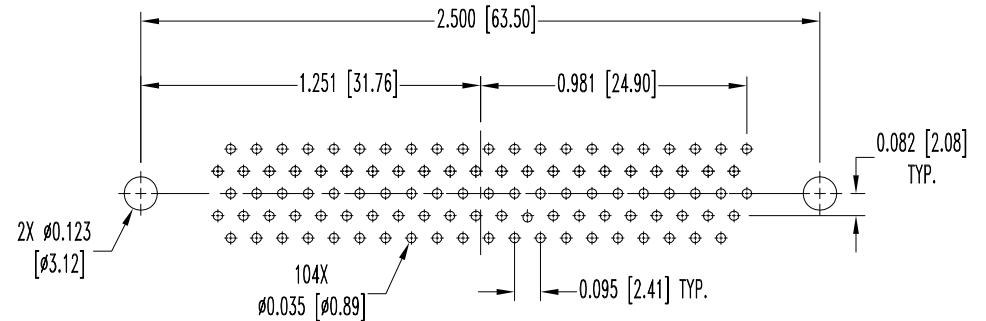
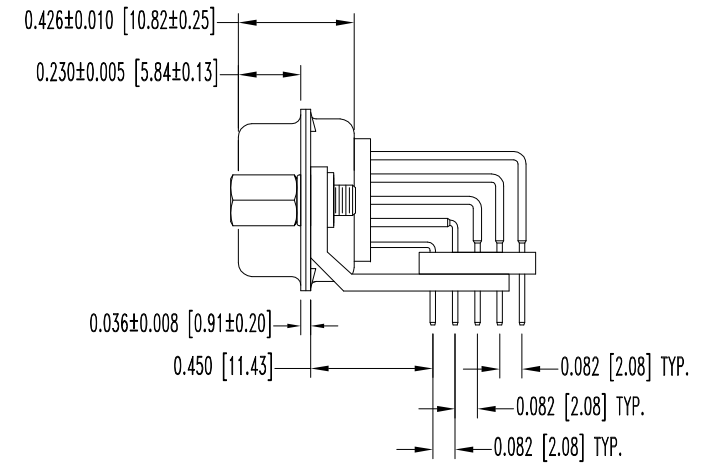


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK9900

DATE	REV	REVISION RECORD	APP	DR	CK
11-13-08	NC	ECO 30239	TK	YK	TK
5-3-10	A	ECO 32433	TK	ME	TK

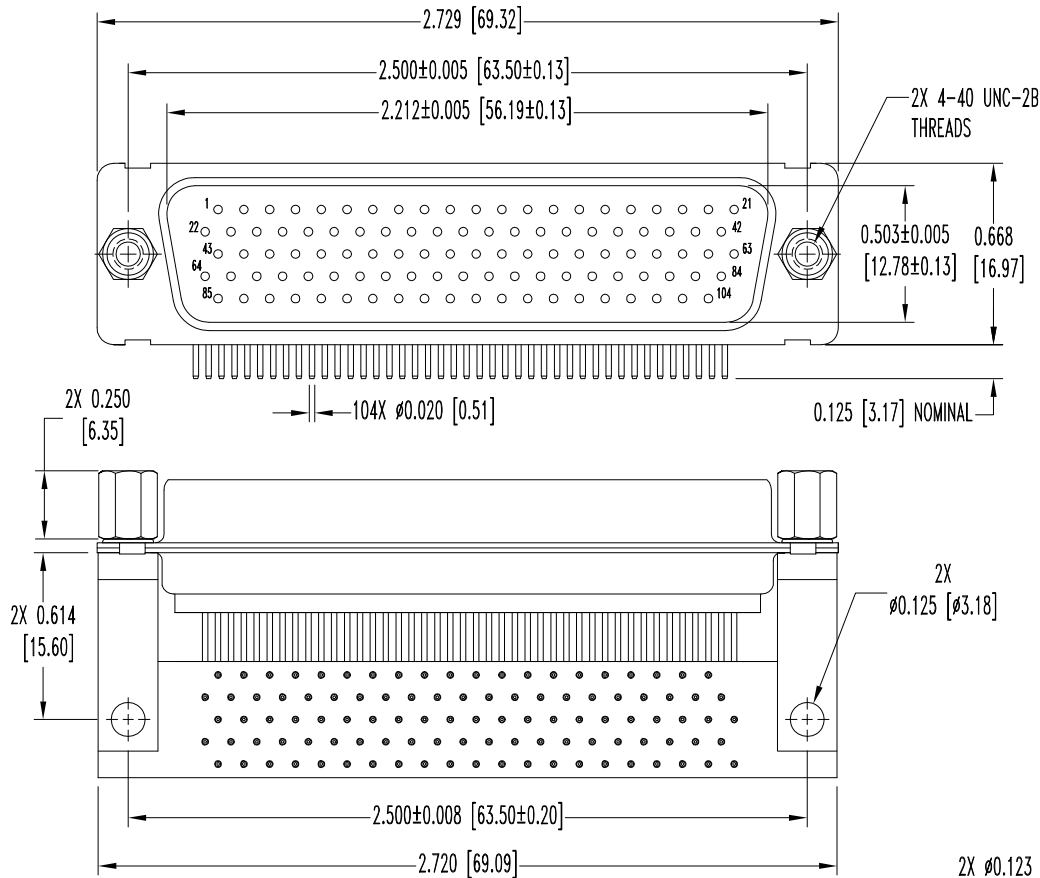

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLACK COLOR.

CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL FINISH.

SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

JACKSCREWS: BRASS, ZINC PLATE AND CHROMATE SEAL.

MOUNTING BRACKETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.


RIVETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE

IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION. VISIT
CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE
OR CONNECTPOSITRONIC.COM.

3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198	
 DECIMAL TOL. ± 0.015 [0.38]	ODD SERIES N.T.S.	SCALE N.T.S.	DRAWN BY YK
TITLE ODD104M5R70T0/AA		APPROVED BY T KEPLEY	
ANGULAR TOL. ± 5°	DATE 11-13-08	DRAWING NUMBER SK9900	REV. A