


Number of contacts

6-64

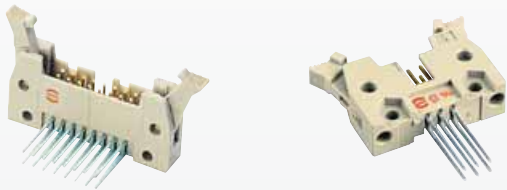

Male header with wrap posts

Identification	No. of contacts	Part No.					
		Without levers		With short levers		With long levers	
Male header with angled wrap posts Length: 15 mm □ 0.6 mm	6	09 18 506	└ 926*	09 18 506	└ 916*	09 18 506	└ 906*
	10	09 18 510	└ 926*	09 18 510	└ 916*	09 18 510	└ 906*
	14	09 18 514	└ 926*	98 18 514	└ 916*	09 18 514	└ 906*
	16	09 18 516	└ 926*	09 18 516	└ 916*	09 18 516	└ 906*
	20	09 18 520	└ 926*	09 18 520	└ 916*	09 18 520	└ 906*
	26	09 18 526	└ 926*	09 18 526	└ 916*	09 18 526	└ 906*
	34	09 18 534	└ 926*	09 18 534	└ 916*	09 18 534	└ 906*
	40	09 18 540	└ 926*	09 18 540	└ 916*	09 18 540	└ 906*
	50	09 18 550	└ 926*	09 18 550	└ 916*	09 18 550	└ 906*
	60	09 18 560	└ 926*	09 18 560	└ 916*	09 18 560	└ 906*
	64	09 18 564	└ 926*	09 18 564	└ 916*	09 18 564	└ 906*
Male header with straight wrap posts Length: 15 mm □ 0.6 mm	6	09 18 506	└ 927*	09 18 506	└ 917*	09 18 506	└ 907*
	10	09 18 510	└ 927*	09 18 510	└ 917*	09 18 510	└ 907*
	14	09 18 514	└ 927*	98 18 514	└ 917*	09 18 514	└ 907*
	16	09 18 516	└ 927*	09 18 516	└ 917*	09 18 516	└ 907*
	20	09 18 520	└ 927*	09 18 520	└ 917*	09 18 520	└ 907*
	26	09 18 526	└ 927*	09 18 526	└ 917*	09 18 526	└ 907*
	34	09 18 534	└ 927*	09 18 534	└ 917*	09 18 534	└ 907*
	40	09 18 540	└ 927*	09 18 540	└ 917*	09 18 540	└ 907*
	50	09 18 550	└ 927*	09 18 550	└ 917*	09 18 550	└ 907*
	60	09 18 560	└ 927*	09 18 560	└ 917*	09 18 560	└ 907*
	64	09 18 564	└ 927*	09 18 564	└ 917*	09 18 564	└ 907*

* Not normally kept in stock
For accessories see page 09.18
For dimensions see page 09.17

For performance level 3 please specify digit 7
For performance level 2 please specify digit 6
> 0.76 µm Au (30 µinch) on request 5

7
6
5

7
6
5

7
6
5

Number of contacts

6-64



Male header with wrap posts

Identification

Drawing


Dimensions in mm

Male header

No. of contacts	A	B	C	D	E	F	G
6	26.9	16.76	22.86	12.45	2.54 x 2 = 5.08	36.9	40.3
10	32.0	21.84	27.94	17.53	2.54 x 4 = 10.16	42.0	45.4
14	37.1	26.92	33.02	22.61	2.54 x 6 = 15.24	47.1	50.4
16	39.6	29.46	35.56	25.15	2.54 x 7 = 17.78	49.6	53.0
20	44.7	34.54	40.64	30.23	2.54 x 9 = 22.86	54.7	58.1
26	52.3	42.16	48.26	37.85	2.54 x 12 = 30.48	62.3	65.7
34	62.5	52.32	58.42	48.01	2.54 x 16 = 40.64	72.5	75.8
40	70.1	59.94	66.04	55.63	2.54 x 19 = 48.26	80.1	83.5
50	82.8	72.64	78.74	68.33	2.54 x 24 = 60.96	92.8	96.2
60	95.5	85.34	91.44	81.03	2.54 x 29 = 73.66	105.5	108.9
64	100.6	90.42	96.52	86.11	2.54 x 31 = 78.74	110.6	113.9


Long levers

for use with female connector
with strain relief clamp

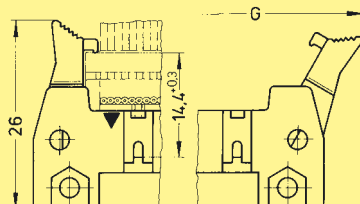


Short levers


for use with female connector
without strain relief clamp



Angled versions

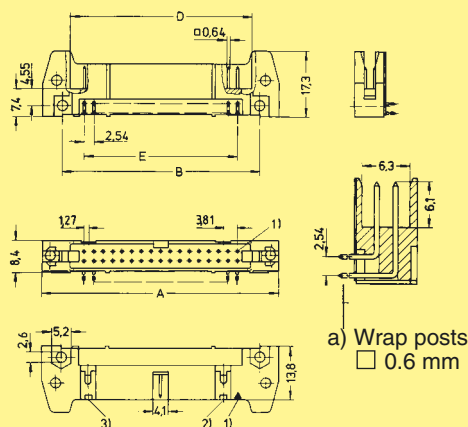

Straight versions

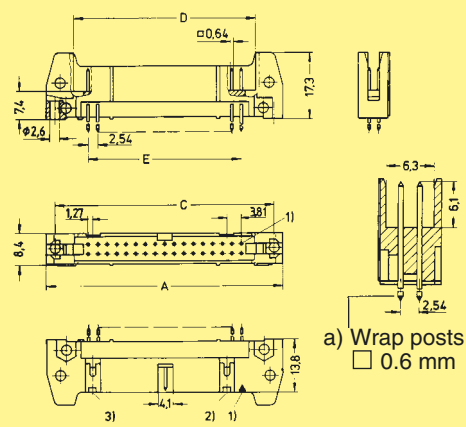

Board drillings



For accessories see page 09.18

1) Contact number 1

2) No polarization slot

for 6, 10 or 14 way male header

3) No polarization slot

for 6 way male header

4) Pitch tolerance: ± 0.1

SEK

09
17