


2-Conductor Female PCB Terminal Blocks Pin Spacing 3.5 mm / 0.138 in; Series 252






Pin spacing 3.5 mm / 0.138 in
 2 x 0.4 - 0.8 mm Ø "s" | 2 x AWG 26 - 20 "sol."
 100 V / 1.5 kV / 2 ①
 2 A

6 - 7 mm / 0.26 in

Pin spacing 3.5 mm / 0.138 in
 2 x 0.4 - 0.8 mm Ø "s" | 2 x AWG 26 - 20 "sol."
 100 V / 1.5 kV / 2 ①
 2 A


6 - 7 mm / 0.26 in

① 100 V = rated voltage
 1.5 kV = rated surge voltage
 2 = pollution degree

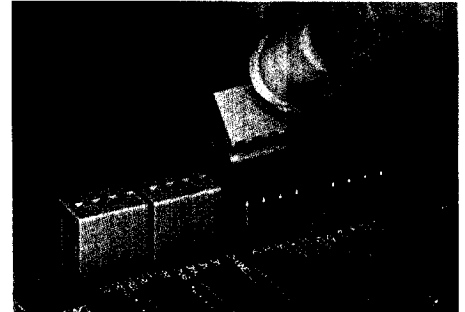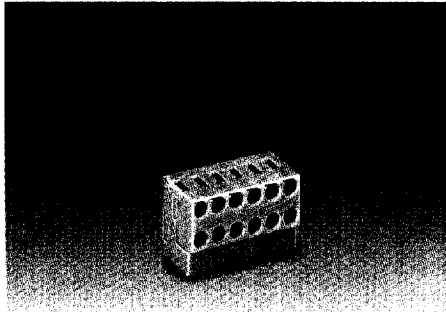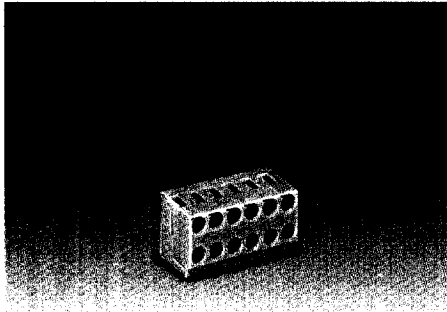


Placing the PCB terminal block


No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Female terminal blocks, for individual solder pins			Female terminal blocks, for solder pins strip		
2 x 2	252-102	320	2 x 2	252-152	320
3 x 2	252-103	200	3 x 2	252-153	200
4 x 2	252-104	150	4 x 2	252-154	150
5 x 2	252-105	120	5 x 2	252-155	120
6 x 2	252-106	100	6 x 2	252-156	100
7 x 2	252-107	80	7 x 2	252-157	80
8 x 2	252-108	70	8 x 2	252-158	70
9 x 2	252-109	60	9 x 2	252-159	60
10 x 2	252-110	55	10 x 2	252-160	55
11 x 2	252-111	50	11 x 2	252-161	50
:	:	:	:	:	:
20 x 2	252-120	25	20 x 2	252-170	25
21 x 2	252-121	25	21 x 2	252-171	25
22 x 2	252-122	25	22 x 2	252-172	25
23 x 2	252-123	20	23 x 2	252-173	20
24 x 2	252-124	20	24 x 2	252-174	20

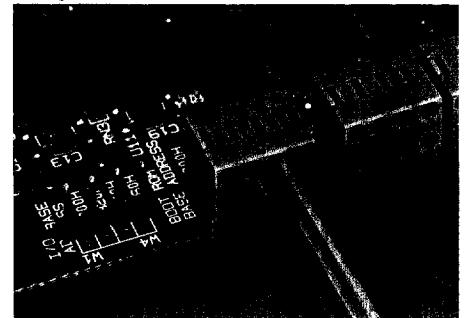

Connecting the conductor directly on the board ...

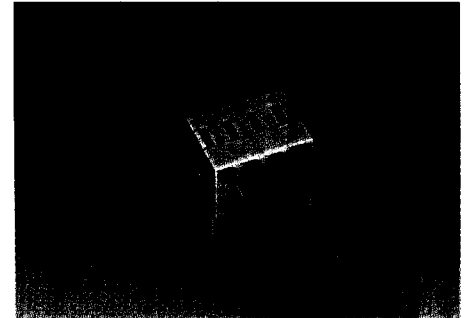

... or pre-assembly

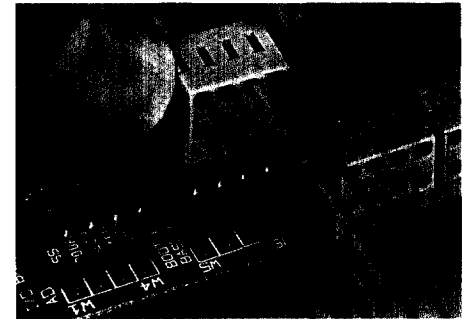

Replacement of the board



Removal of conductors

Accessories

	Solder pin , Ø 1 x 8.5 mm for PCBs up to 2 mm / 0.079 in thick 243-131 1000		Solder pin strip contact factory
	Marker cards , with self-adhesive marker strips 1 - 16 (40 x) 709-179 1 card		Marker cards , with self-adhesive marker strips 17 - 32 (40 x) 709-180 1 card

Dimensions (in mm) Diameter of drilled hole: 1.2 ± 0.05 mm L = No. of poles x pin spacing

