


- Shielded
- Multi Port
- Thru Hole



- Side Entry
- Super Low Profile
- Enhanced Shielding
- Shield Ground Back
- 10 Positions



Type
AJT10D

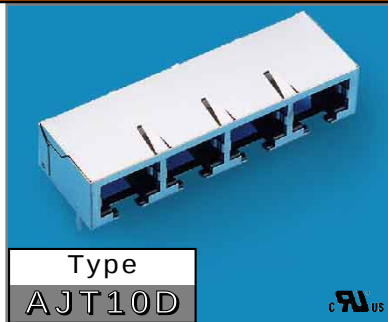


Technical Data

Housing: Glass filled Polyester UL94V-0. Standard color Black
Insert: Glass filled Polyester UL94V-0
Contact: 0.35mm (0.14") thickness Phosphor Bronze Alloy selective Gold plating over Nickel over Tin
Shield: 0.25mm Brass Tin-Lead plated
 For electrical specifications see page 4

Dimensions (mm)

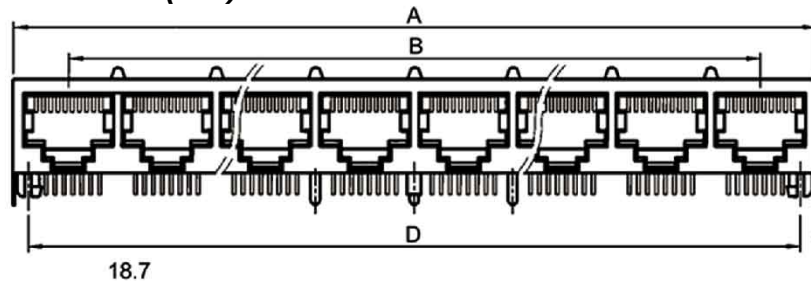

PC Board Layout

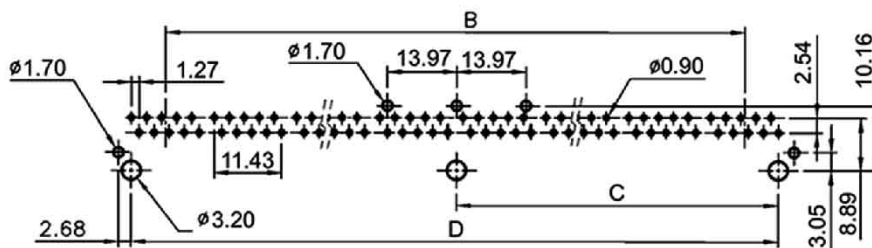

Ports	Dim"A" ± 0.10 0.20	DIM"B"±0.20	DIM"C"±0.10	DIM"D"±0.15
2	31.24	13.97	-----	25.40
4	59.18	41.91	-----	53.34
6	87.12	69.85	-----	81.28
8	115.06	97.79	54.61	109.22

Ordering Information

A	J	T	1	0	D	A	8	2	3
Type					Style	Positions 10 (A)	Contacts 2, 4, 6, 8, 10 (A)	Ports 2, 4, 6, 8	Plating 3=30u" 4=50u"

Ports	Order No.
2	AJT10D A823
4	AJT10D A843
6	AJT10D A863
8	AJT10D A883

Standard color: black