

250MHz SAW Filter

Model: **TA0998A**

Part No: **MP02018**

REV NO.: 1


A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC voltage: 5 V
3. Operating Temperature: : -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item		Min.	Typ.	Max.
Center frequency Fc	MHz	-	250	-
Insertion loss (249.9 ~ 250.9MHz) IL	dB	-	2.05	3.8
Amplitude ripple (249.9 ~ 250.9MHz)	dB	-	0.13	1.8
Attenuation (Reference level from 0 dB)				
Fc-100 ~ Fc-40 MHz	dB	45	66	-
Fc-40 ~ Fc-400 MHz	dB	43	58	-
Fc-400 ~ Fc-450 MHz	dB	40	63	-
Source impedance Zs	Ω	-	50	-
Load impedance ZL	Ω	-	50	-

C. MEASUREMENT CIRCUIT:

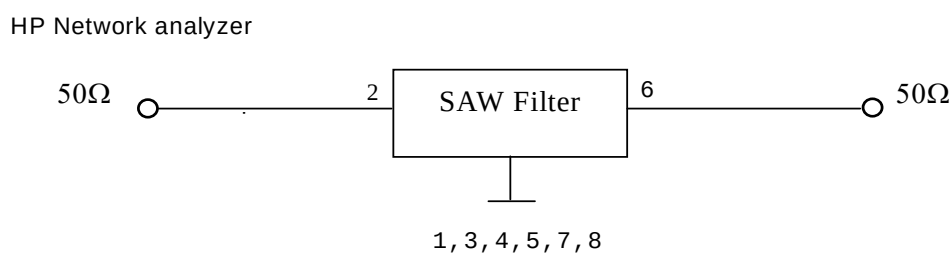


250MHz SAW Filter

Model: TA0998A


Part No: MP02018

REV NO.: 1

D. OUTLINE DRAWING:

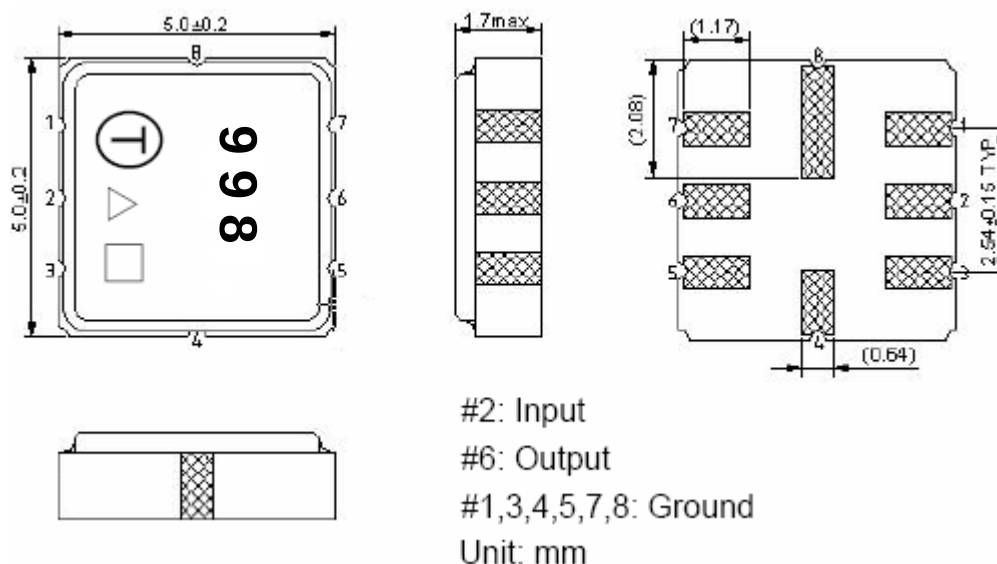

E. PCB FOOTPRINT

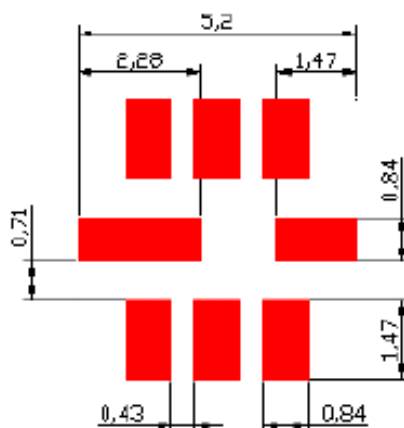

250MHz SAW Filter



Model: **TA0998A**

Part No: **MP02018**

REV NO.: 1

F. FREQUENCY CHARACTERISTICS:

Transfer function

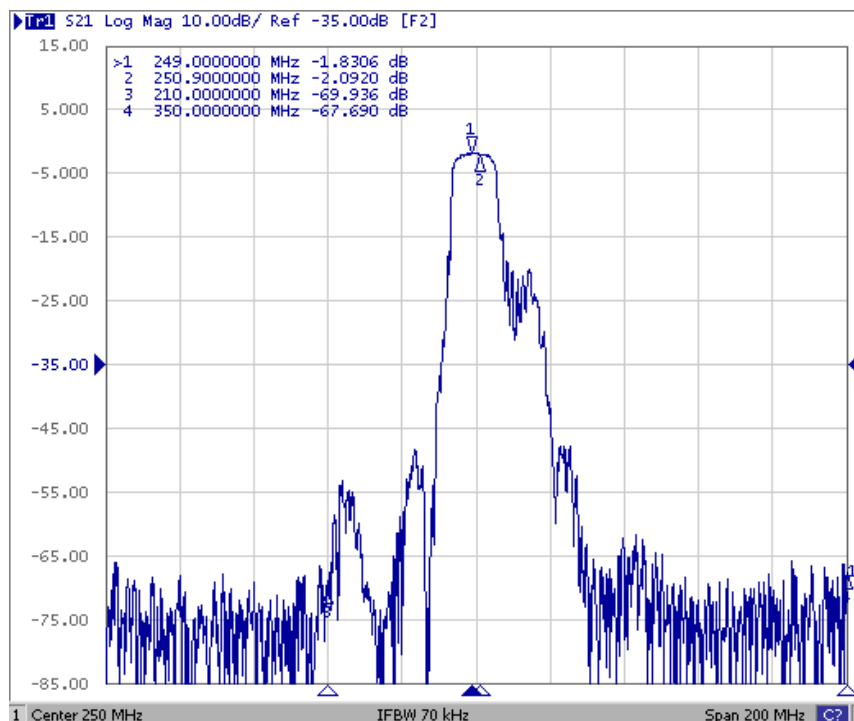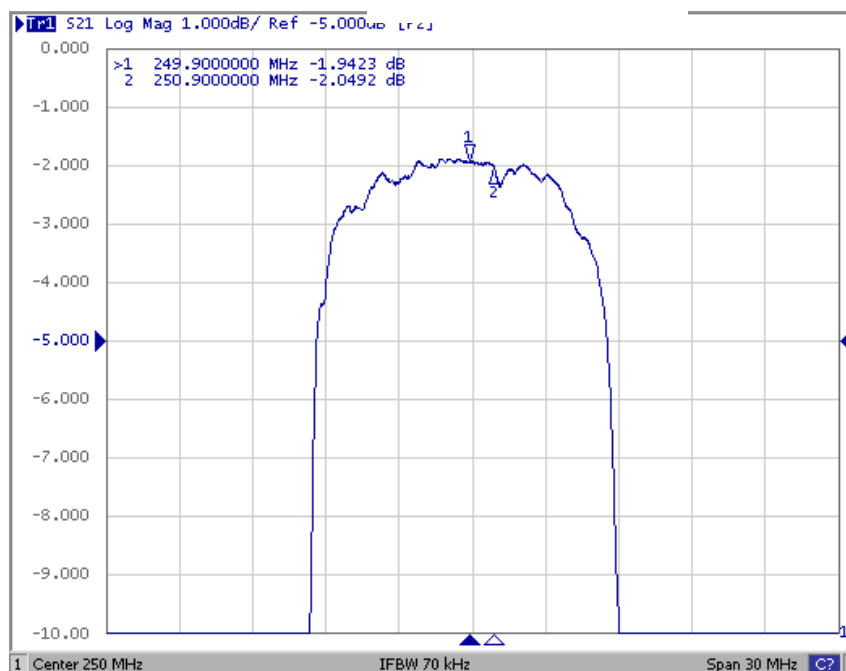


250MHz SAW Filter

Model: TA0998A

Part No: MP02018

REV NO.: 1

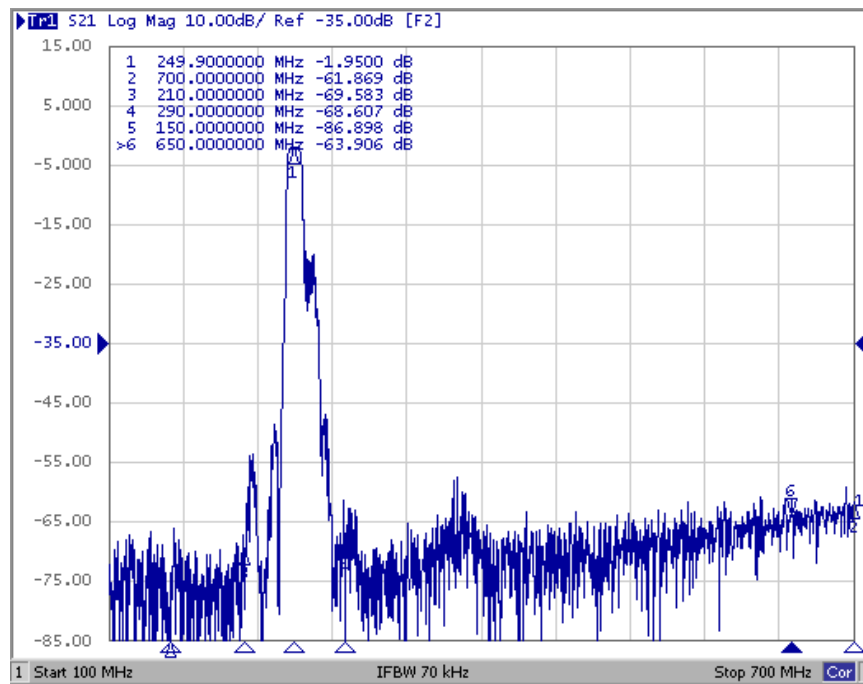

250MHz SAW Filter


Model: TA0998A

Part No: MP02018

REV NO.: 1

G. PACKING:

1. REEL DIMENSION

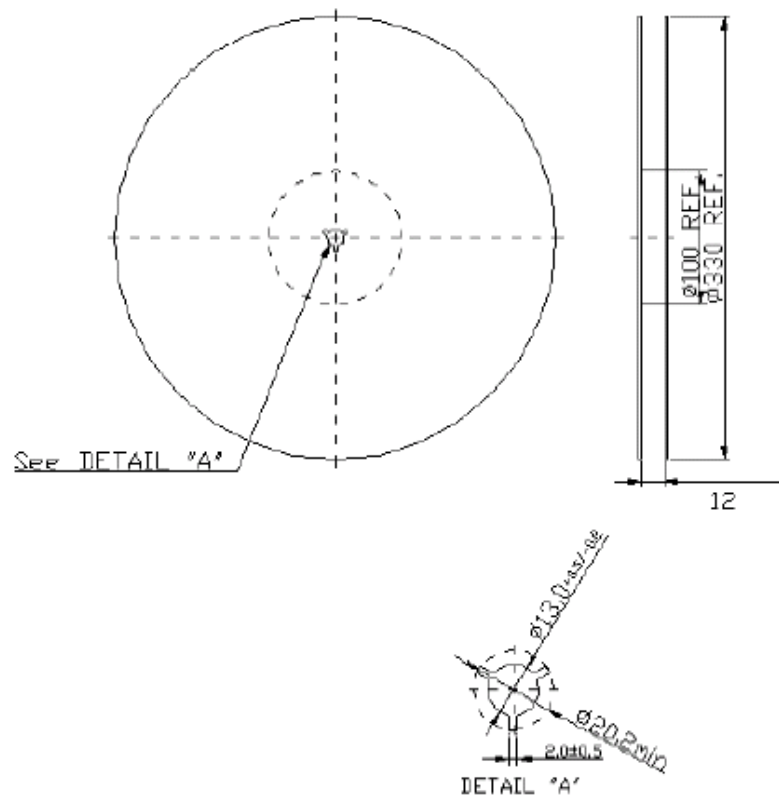

2. TAPE DIMENSION

