


OPS871-HM

Socket G2 3rd Gen Intel® Core™ Open Pluggable Specification (OPS) Digital Signage Player with Intel® HM76 Chipset and TPM 1.2



- | | |
|------------------|-----------------------------|
| 1. 2.5" HDD slot | 7. Audio (Line-out) |
| 2. USB 3.0 x 2 | 8. Audio (Mic-in) |
| 3. Ethernet | 9. Power indicator |
| 4. HDMI | 10. HDD indicator |
| 5. Power Switch | 11. JAE TX-25 |
| 6. Reset | 12. WiFi antenna (optional) |

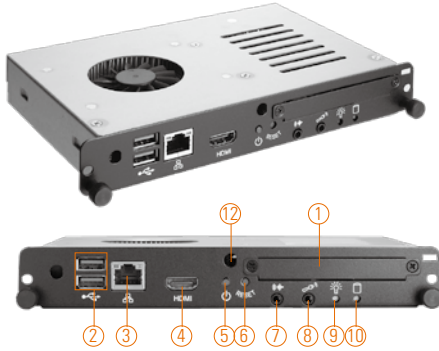

Specifications

| | | |
|--|--|---|
| Main System | CPU | Supports socket G2 (rPGA 988B) for 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge) (optional) |
| | Chipset | Intel® HM76 PCH |
| | System Memory | 1 x 204-pin DDR3 1600 SO-DIMM max. up to 8 GB |
| | Storage | 1 x 2.5" SATA HDD tray |
| | Watchdog Timer | 255 levels, 1 ~ 255 sec. |
| IO | 2 x USB 3.0 | |
| | 1 x 10/100/1000Mbps Ethernet | |
| | 1 x Power on/off button | |
| | 1 x Reset button | |
| | 1 x HDMI | |
| | 1 x Audio (Line-out/Mic-in) | |
| | 1 x DisplayPort (via OPS JAE interconnector) | |
| | 3 x USB 2.0 (via OPS JAE interconnector) | |
| | 1 x USB 3.0 (via OPS JAE interconnector) | |
| | 1 x HDMI/DVI (via OPS JAE interconnector) | |
| | 1 x Audio (Line-out, via OPS JAE interconnector) | |
| 1 x UART (TX/RX, via OPS JAE interconnector) | | |
| Indicator | 1 x LED for system power ON | |
| | 1 x LED for HDD active | |
| WiFi | Supports 802.11 a/b/g/n (optional) | |
| Expansion Slot | 1 x PCI Express Mini Card | |
| Dimensions | 200 mm (7.87") (W) x 119 mm (4.68") (D) | |
| | x 30 mm (1.18") (H) | |
| Packing Dimensions | 270 mm (10.63") (W) x 197 mm (7.76") (D) | |
| | x 70 mm (2.76") (H) | |
| Weight (net/gross) | 1 kg (2.2 lb)/1.5 kg (3.3 lb) | |
| Environmental | 0° ~ +45°C (32°F ~ 113°F) (With airflow 1.2m/s) | |

Packing

- 1 x driver CD
- 1 x HDD mylar x 1
- 1 x thermal grease (syringe 1G)
- 2 x M3 x 4 screw
- 2 x M4 x 6 screw

* All specifications and photos are subject to change without notice.
© 2013 Axiomtek Co., Ltd. All rights reserved.

Features

- Open Pluggable Specification (OPS) compliance
- Supports socket G2 (rPGA 988B) 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge)
- DDR3 1600 SO-DIMM max. up to 8 GB
- USB 3.0, PCI Express Mini Card
- Easy maintenance: pluggable HDD and easy-to-change DRAM
- HDMI interface for 2nd display
- Supports TPM 1.2



▲ Rear view

Optional OS Installation

Windows® XP, Windows® 7

Ordering Information

Standard

| | |
|-----------|---|
| OPS871-HM | OPS digital signage player supports socket G2 Intel® Core™ processor (Ivy Bridge) |
|-----------|---|

Optional

| | |
|---------|---|
| OFF320 | 31.5" full HD digital signage display |
| OFF321 | 31.5" LED backlight full HD digital signage display |
| AX93157 | OPS docking board |

* Specification and certifications are based on options and may vary.

Dimensions

