

HIGH CURRENT MULTILAYER CHIP BEAD

ACML-0805H



RoHS
Compliant



2.0 x 1.25 x 0.85mm

FEATURES:

- Multilayer monolithic structure yields high reliability
- Unique terminal electrode structure ensures permissible currents
- High impedance over a wide frequency range

APPLICATIONS:

- Audio & Video Equipment
- Automotive Electrical Equipment
- Communication Equipment
- OA Equipment

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	ACML-0805H-xxx Series
Operating temperature:	-55°C to + 125°C
Storage temperature:	-55°C to + 125°C

Part Number	Z (Ω)	Test Freq	Rdc	Ir
	±25%	MHz	Ω Max	mA Max
ACML-0805H-070	7	100	0.02	4000
ACML-0805H-110	11	100	0.02	3000
ACML-0805H-310	31	100	0.03	3000
ACML-0805H-600	60	100	0.05	3000
ACML-0805H-101	100	100	0.08	2000
ACML-0805H-121	120	100	0.1	2000
ACML-0805H-181	180	100	0.15	2000
ACML-0805H-221	220	100	0.17	2000
ACML-0805H-301	300	100	0.2	1500
ACML-0805H-601	600	100	0.25	1200
ACML-0805H-102	1000	100	0.3	1000

Ir: Rated current applied when the chip surface temperature rise 20°C

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ACML - 0805H - □□□ - □

Impedance Code


Please refer to the table

Packaging


T Tape and Reel

TYPICAL ELECTRICAL CHARACTERISTICS:

ACML-0805H-151

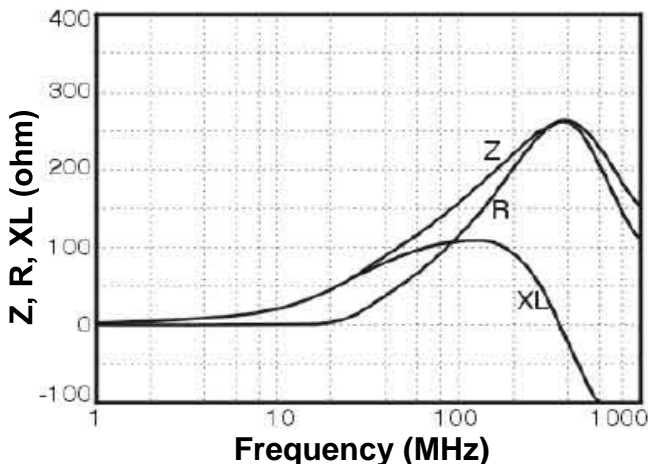

ACML-0805H-601

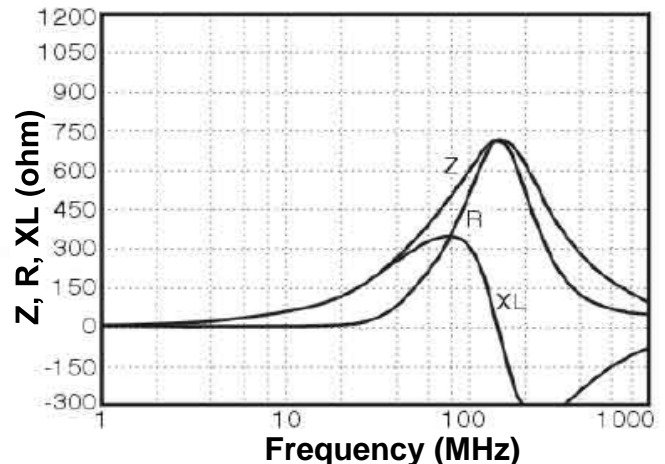

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.24.07**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

HIGH CURRENT MULTILAYER CHIP BEAD

ACML-0805H




RoHS
Compliant




2.0 x 1.25 x 0.85mm

OUTLINE DRAWING:

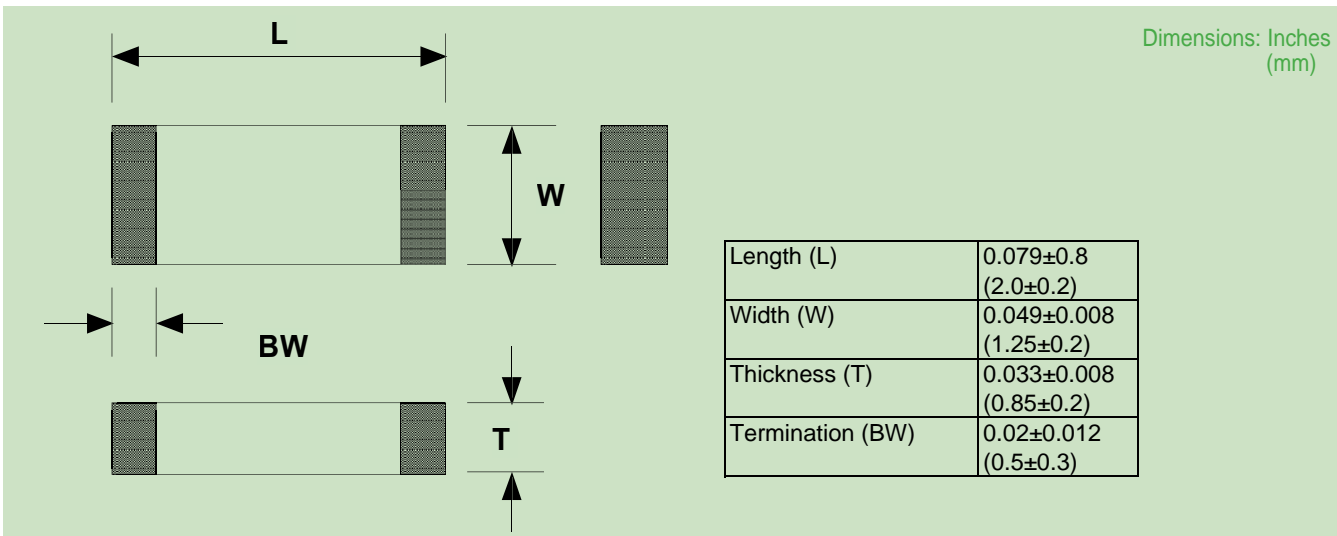

TAPE & REEL: Tape and reel 4,000pcs/reel

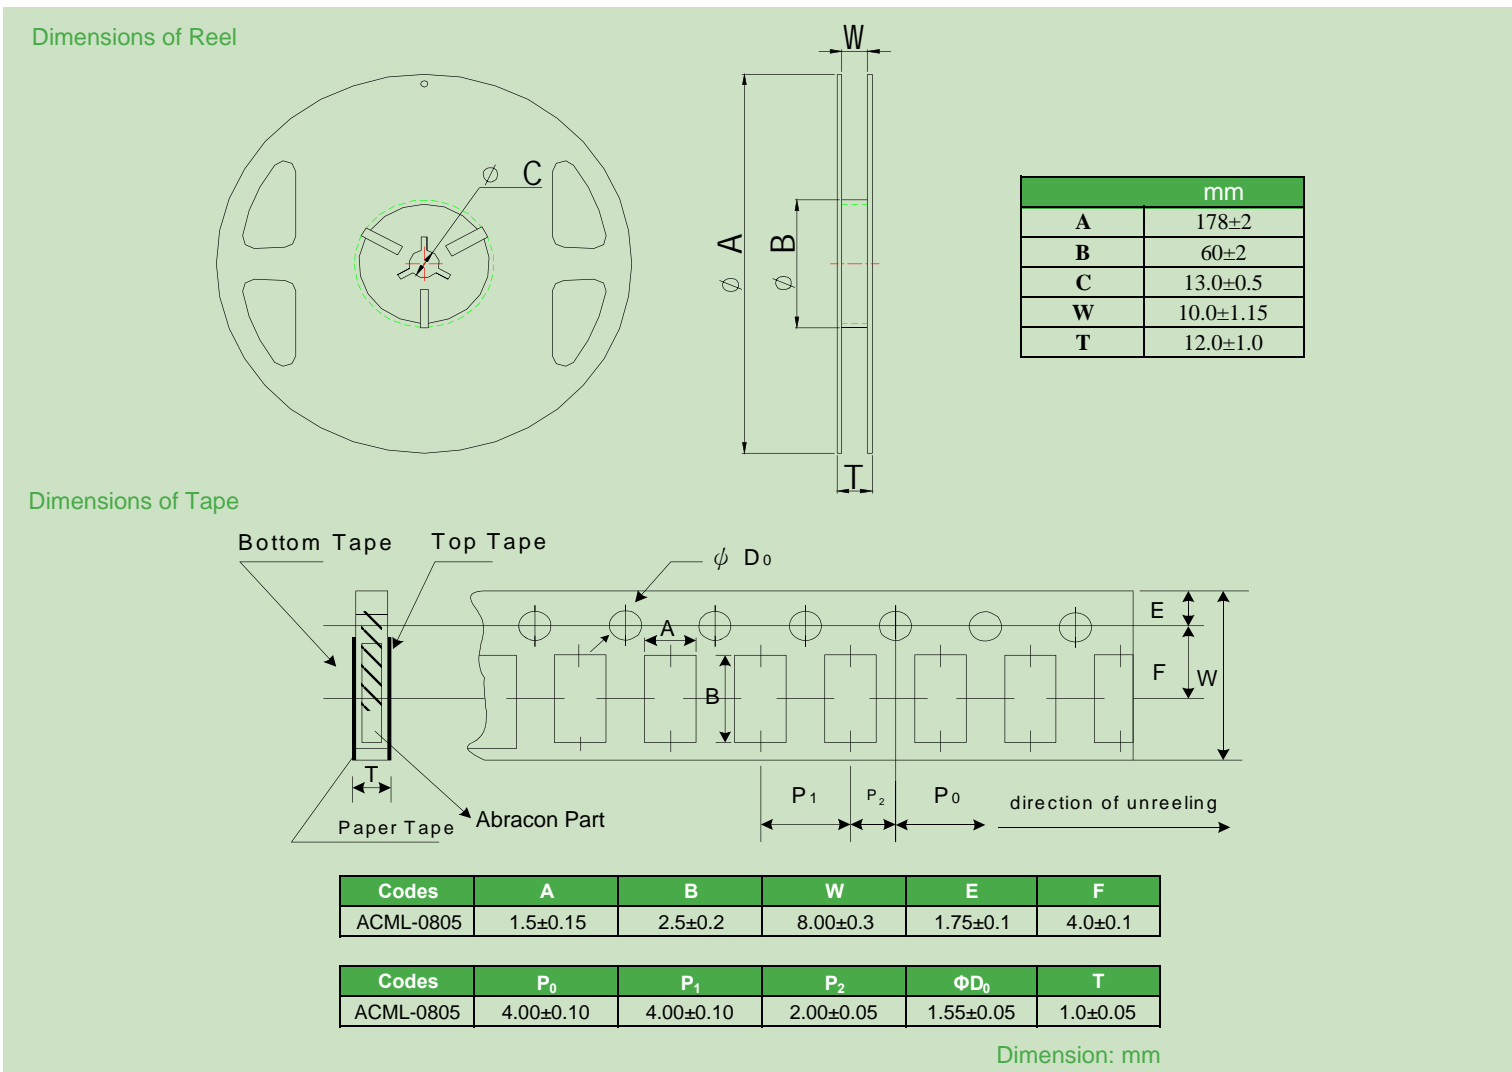

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.24.07**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com