

FJ-20-D-06.50-6

FJ-05-D-04.80-2

(1,00mm) .03937"

FJ SERIES

FLAT FLEXIBLE CABLE (FFC) JUMPER

SPECIFICATIONS

For complete specifications see www.samtec.com?FJ

Conductor:
Tin Plated Copper



Conductor Resistance:

300 Ω/km max

Insulation Resistance:

10 MΩ/km min

(conductor-to-conductor)

Dielectric Test:

400 VAC during 1 minute

(conductor-to-conductor)

Temperature Rating:

-30°C to +80°C

Voltage Rating:

300 VAC

Flame Resistance:

VW-1 (UL 758)

Current Rating:

1.9A @ 50°C ambient

(4 contacts powered)

RoHS Compliant:




Yes

Mates with:
FC1, ZF1

Double or reversed ended

(1,00mm) .03937" pitch

Variable lengths

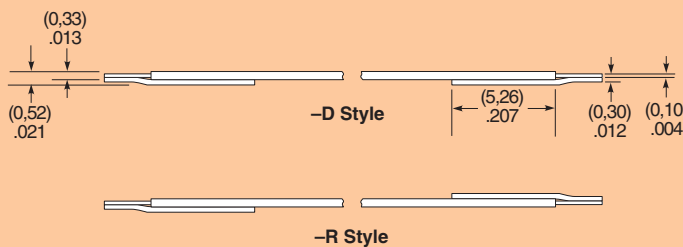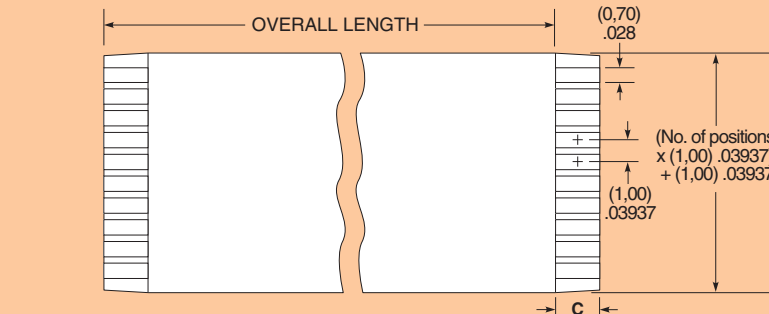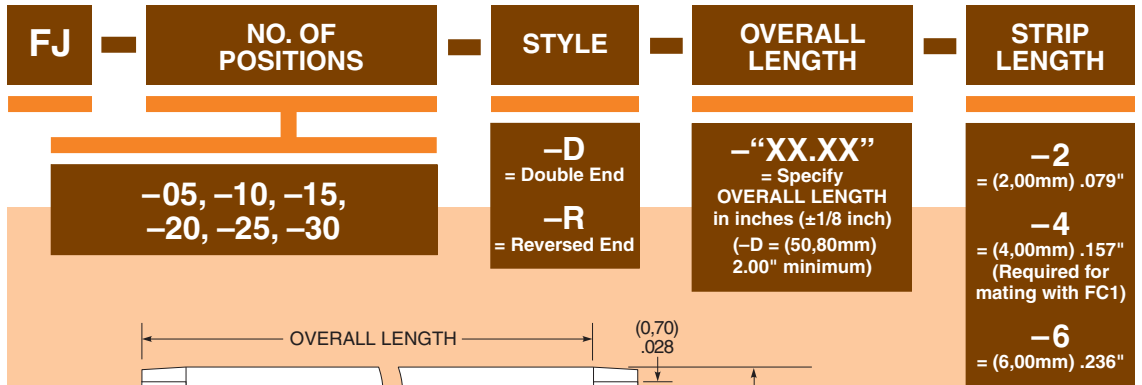

STRIP LENGTH	C
-2	(2,00) .079
-4	(4,00) .157
-6	(6,00) .236

Note: Stiffener color will be blue or black at Samtec's discretion.

Note: Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM