

SPECIFICATIONS

Mechanical

Mating Force: 4.00Kg (8.81Lb) max. (POF)
 3.50Kg (7.71Lb) max. (USB)
Unmating Force: 0.60~4.00Kg (1.32~8.81Lb) (POF)
 1.00Kg (2.20Lb) min. (USB)
Durability: 500 Cycles (POF)
 1500 Cycles (USB)

Electrical


POF: Supply Voltage: -0.5~7V
Power Dissipation: 120mw
DC Input Voltage: -0.5V~Vcc +0.5V
USB: Current Rating: 1.5A

Physical


Housing: Thermoplastic, UL 94V-0 rated
Contact & Shell: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -20 to +70

2F Series

**Right Angle, T/H, Over Dual
 USB
 11 Pos.**



DRAWING

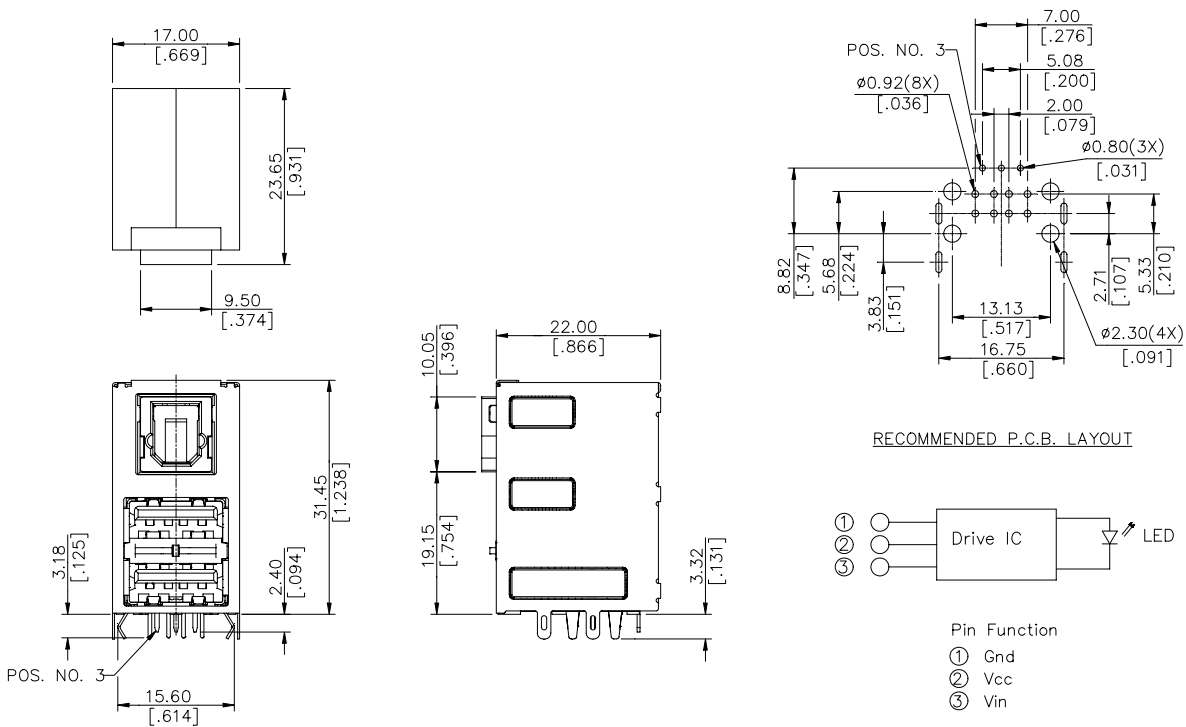

ORDERING INFORMATION

PRODUCT NO.: 2F 1 3 T * 1 - FU91 - 4 F

