


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

DIMENSIONS mm (inches)

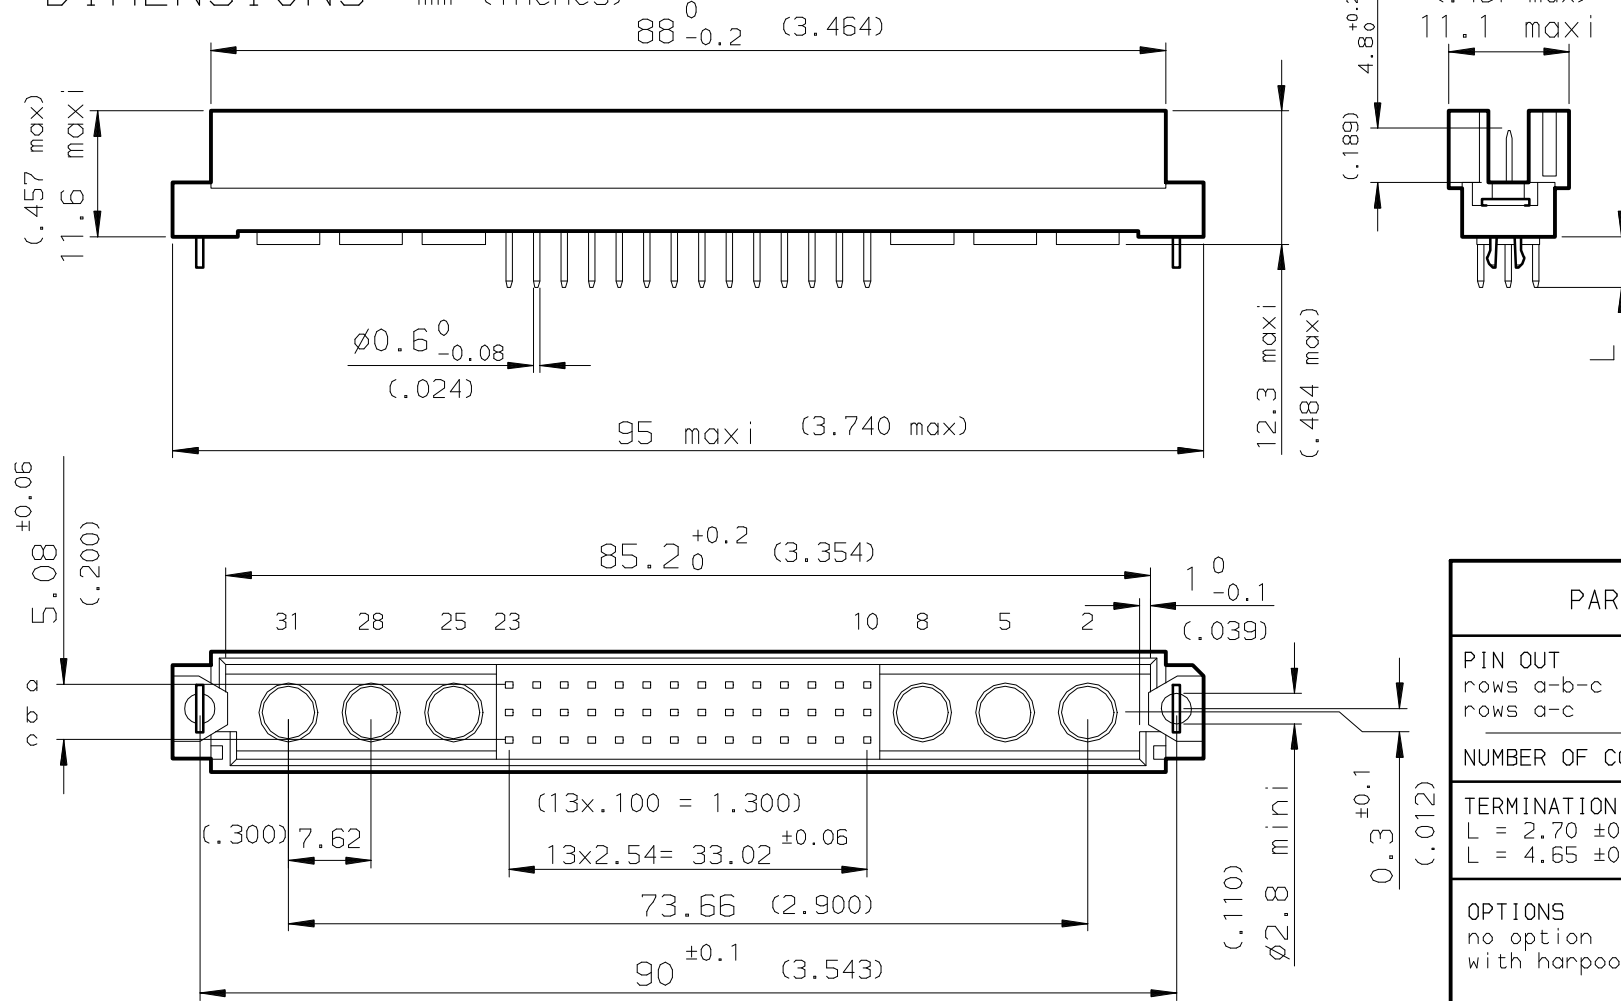

PART NUMBER		8609			E8				5	
PIN OUT										
rows a-b-c		3 - 42								
rows a-c		4 - 28								
NUMBER OF CONTACTS										
TERMINATION										
L = 2.70 ±0.25 (.106)		24								
L = 4.65 ±0.25 (.183)		14								
OPTIONS										
no option		7								
with harpoons		for PCB thickness 1.6 mm ----- H								
		for PCB thickness 2.4 mm ----- A								
		for PCB thickness 3.2 mm ----- R								
PERFORMANCE CLASS										
DIN 41612 class 3		4								
DIN 41612 class 2		5								
DIN 41612 class 1		6								
TERMINATION TYPE										
TIN LEAD		000E1								
LEAD FREE		E1LF								

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European view

FCI		www.fciconnect.com		ISO 1302	tolerance	projection	mm
					ISO 406		
					ISO 1101		
Dr	ROUILLARD	22/02/96	Product family	DIN	size	A3	Scale
Eng	TARON	22/02/96	Spec ref	-			1.5
Chr	LEGARE	22/02/96	Material	SEE NOTES	ECN	LS05-001	
Appr	LEGARE	22/02/96					
title				STRAIGHT MALE WITH SPECIAL CONTACTS		Rev.	
				SOLDER TO BOARD		B	
catalog no				- CUSTOMER COPY		sheet 1 of 1	