

Plug-in Base, Long Range Sensor

E3B2

Plug-in Terminal for Easy Maintenance and Installation

- Universal AC/DC supply voltage
- Replace sensing head without rewiring
- Detect shiny objects with polarized retroreflective type
- Long-range diffuse reflective sensors detect dark objects at long distances
- Built-in ON- and OFF-delay timers available
- Switch selectable light-on/dark-on operation
- Mutual interference protection
- Ready-to-use: includes 3 A relay, mounting bracket and reflector for retroreflective types



Ordering Information

■ SENSORS

Method of detection			Retroreflective		Diffuse reflective	Long-range diffuse
Light source			Polarized IR	Non-polarized IR	Non-polarized IR	
Sensing distance			5 m (16.40 ft)	7 m (22.97 ft)	2 m (6.56 ft)	3 m (9.84 ft)
Part number	Without timers		E3B2-R5M4-US	E3B2-R7M4-US	E3B2-D2M4-US	E3B2-D2M4-US-N
	ON- and OFF-delay timers	(0.5 to 20 s)	E3B2-R5M4D-US	E3B2-R7M4D-US	E3B2-D2M4D-US	—
		(0.05 to 5 s)	E3B2-R5M4D-US-3	—	E3B2-D2M4D-US-3	E3B2-D2M4-US-N-3


■ REPLACEMENT PARTS

Description	Part number
Reflector (supplied with retroreflective sensor)	E39-R2
Mounting bracket (supplied with each sensor)	E39-L35



Specifications

Part number		E3B2-R5M4□-US-□	E3B2-R7M4□-US	E3B2-D2M4□-US-□	E3B2-D2M4□-US-N-□
Method of detection		Retroreflective		Diffuse reflective	Long-range diffuse
Supply voltage		24 to 240 VAC, 50/60 Hz; 12 to 240 VDC			
Power consumption	AC operation	2 VA max.			
	DC operation	1.5 W max.			
Sensing distance		5 m (16.40 ft) with E39-R2 reflector (included)	7 m (22.97 ft) with E39-R2 reflector (included)	2 m (6.56 ft) with 30x30 cm (11.8x11.8 in) 90% reflectance white mat paper	3 m (9.84 ft) with 30 x 30 cm (11.8 x 11.8 in) 90% reflectance white mat paper
Light source		Pulse modulated infrared LED, polarized	Pulse modulated infrared LED		
Detectable object type		Shiny and opaque materials, 80 mm (3.15 in) minimum dimension	Opaque materials, 80 mm (3.15 in) minimum dimension	Opaque and transparent materials	
Operation mode		Light-ON/Dark-ON, switch selectable			
Sensitivity		Adjustable			
Mutual interference protection		Provided			
Control output	Relay	Type	SPDT (Form 1C)		
		Max. load	3 A, 250 VAC, (p.f.=1)		
		Min. load	10 mA, 5 VDC		
Response time	On	Without timer	30 ms max. (E3B2-□□M4-US-□)		
		With timer	0.5 to 20 seconds, adjustable (E3B2-□□M4D-US); 0.05 to 0.5 sec (E3B2-□□M4D-US-□-3)		
	Off	Without timer	30 ms max. (E3B2-□□M4-US-□)		
		With timer	0.5 to 20 seconds, adjustable (E3B2-□□M4D-US); 0.05 to 0.5 sec (E3B2-□□M4D-US-□-3)		
Timing functions		Type	Independent ON-delay and OFF-delay (E3B2-□□M4D-US)		
		Range	0.5 to 20 seconds		
Circuit protection	Output short-circuit		Not provided		
	DC power supply reverse polarity		Provided		
Indicators		Light incident (red LED), output stability (green LED), and output operation (yellow LED)			
Materials	Lens cover		Plastic, polycarbonate		
	Body/receptacle		Plastic, polymethylmethacrylate (PMMA)		
	Access cover		Plastic, polycarbonate		
Mounting		Side surface with two through holes or bottom surface with two threaded metal inserts; bracket E39-L35 and hardware included			
Connections	Conduit		1/2-14 NPT		
	Wire		Plated steel screw terminals		
Weight		230 g (8.1 oz)		200 g (7.1 oz)	
Enclosure ratings	UL		1		
	NEMA		1, 3, 4, 12, 13		
	IEC 144		IP66		
Approvals	UL		Listed, File Number E41515		
	CSA		Certified, File Number LR45951		
Ambient temperature	Operating		-25° to 55°C (-13° to 131°F)		
	Storage		-30° to 70°C (-22° to 158°F)		


■ OUTPUT CIRCUIT DIAGRAM

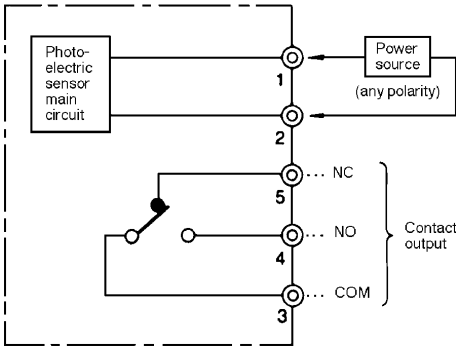

■ CONNECTIONS




■ TIMING CHART

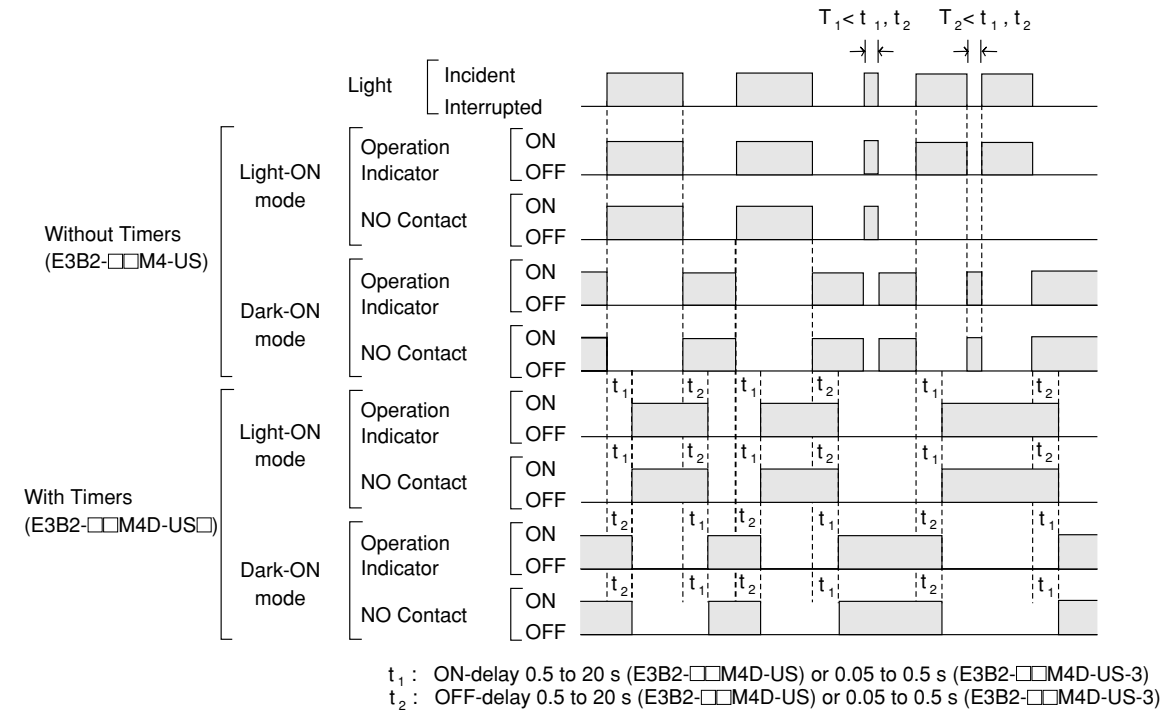


Engineering Data

■ EXCESS GAIN RATIO


E3B2-R5M4□-US-□

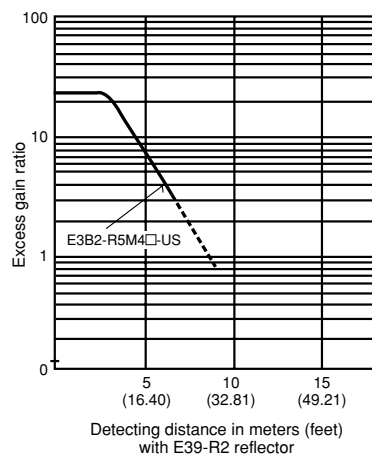


E3B2-R7M4□-US

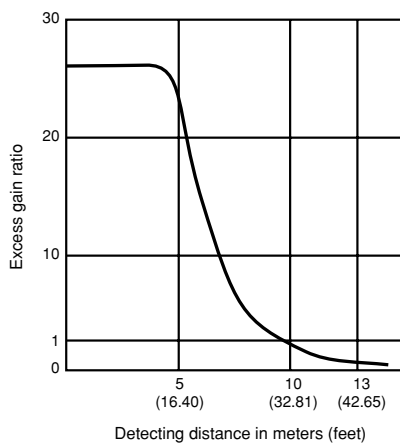

E3B2-D2M4□US-□

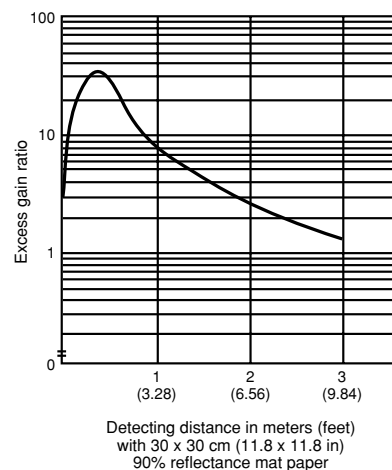


E3B2-D2M4□-US-N-□

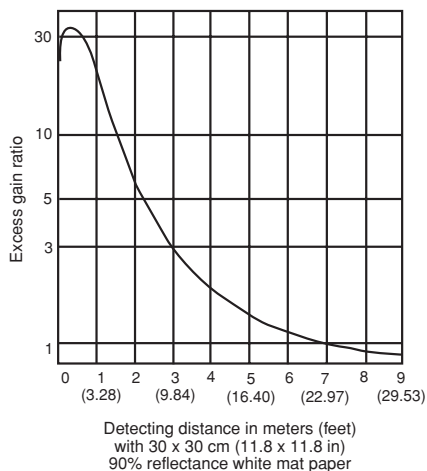


■ OPERATING RANGE

E3B2-R5M4□-US-□

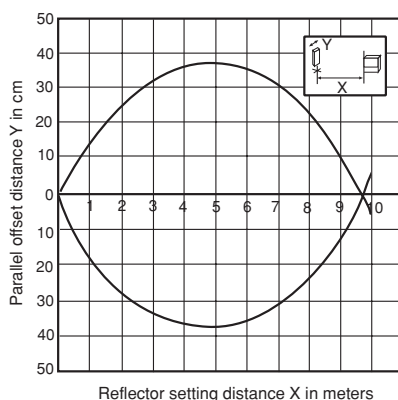


E3B2-D2M4□-US-N-□

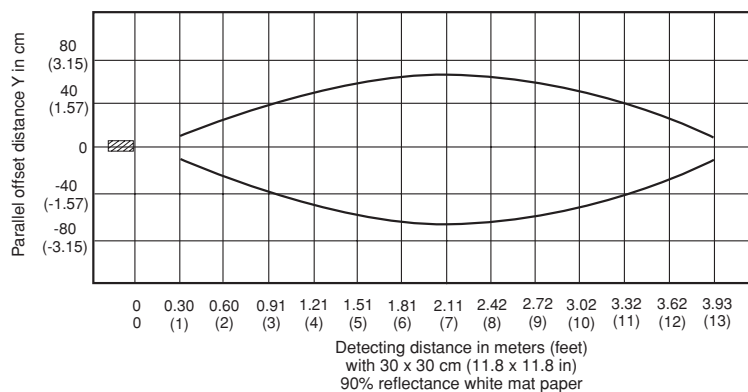


Operating Range continued

E3B2-D2M4□-US-□

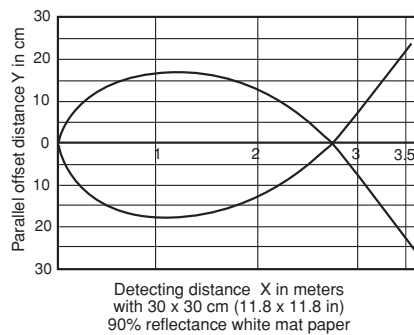

■ DETECTING DISTANCE VS. MINIMUM TARGET SIZE (at maximum sensitivity)




E3B2-D2M4□-US

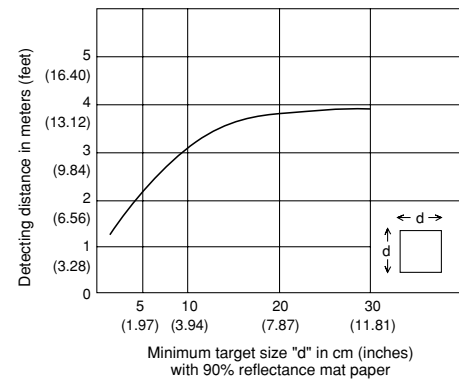


Dimensions

Unit: mm (inch)


■ SENSOR

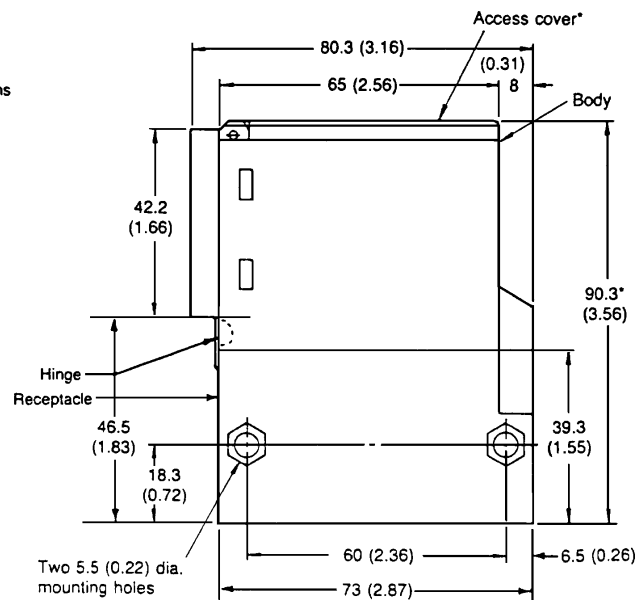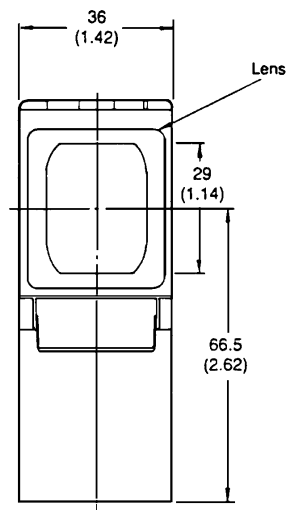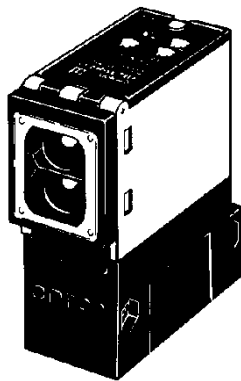


*Allow for a total height of 150 mm (5.91 inches) to open access cover.

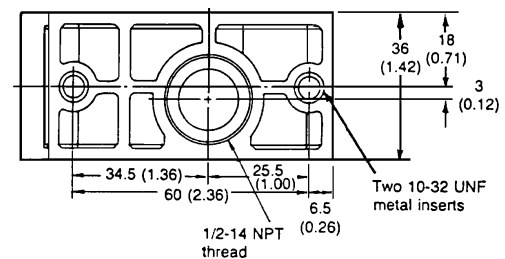

■ E39-R2 REFLECTOR (included)

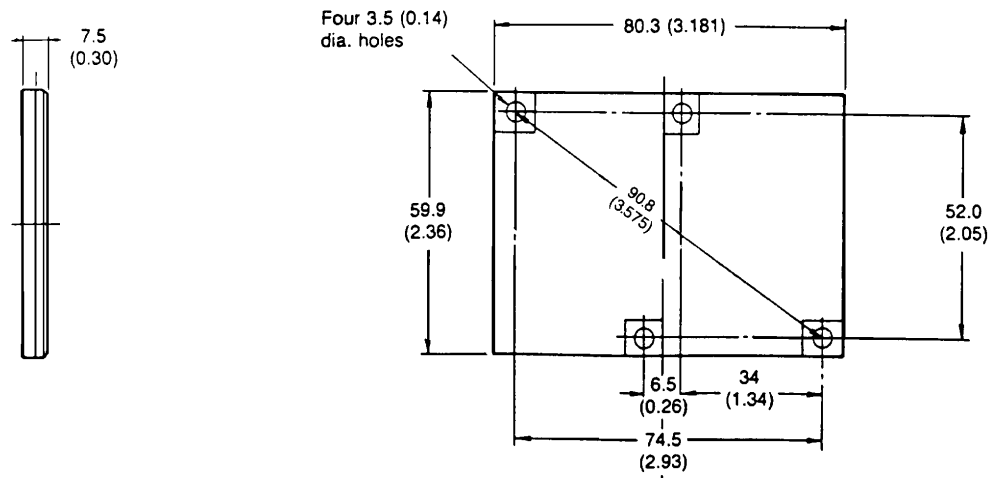

■ E39-L35 MOUNTING BRACKET (included)

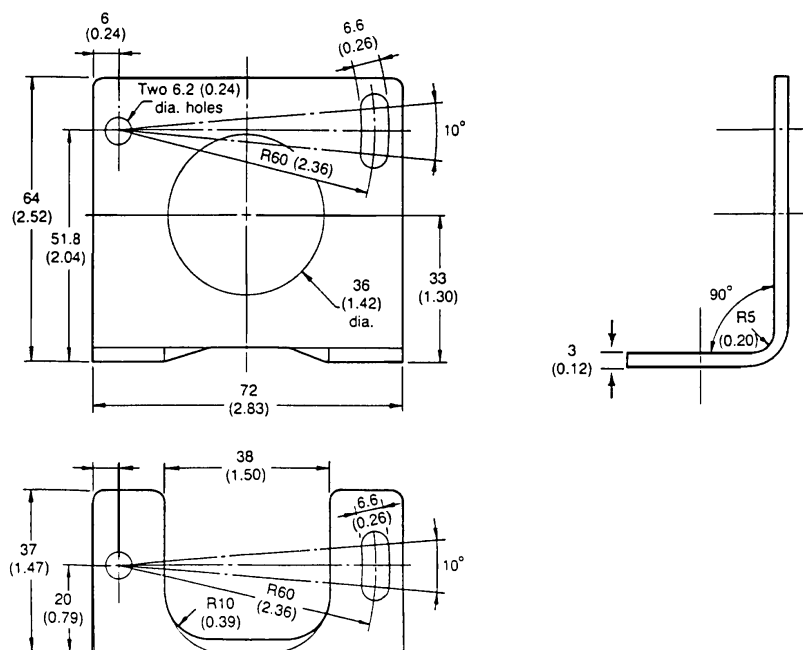

OMRON

OMRON ELECTRONICS LLC

 One East Commerce Drive
 Schaumburg, IL 60173

1-800-55-OMRON
OMRON ON-LINE

 Global - <http://www.omron.com>

 USA - <http://www.omron.com/oei>

 Canada - <http://www.omron.com/oci>
OMRON CANADA, INC.

 885 Milner Avenue
 Scarborough, Ontario M1B 5V8

416-286-6465