

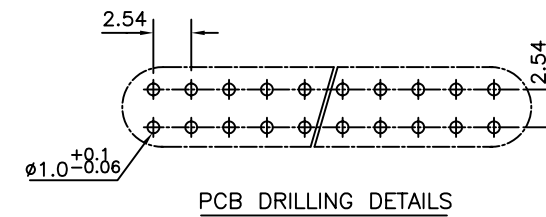
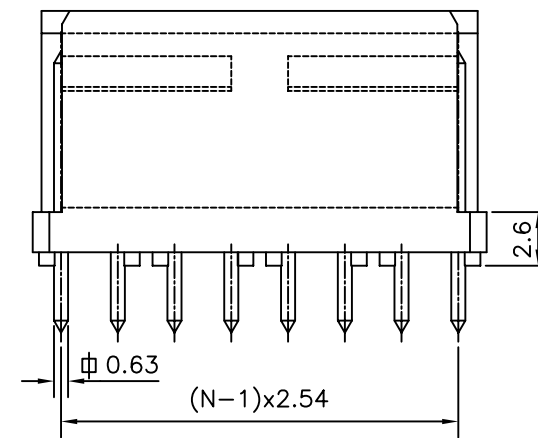
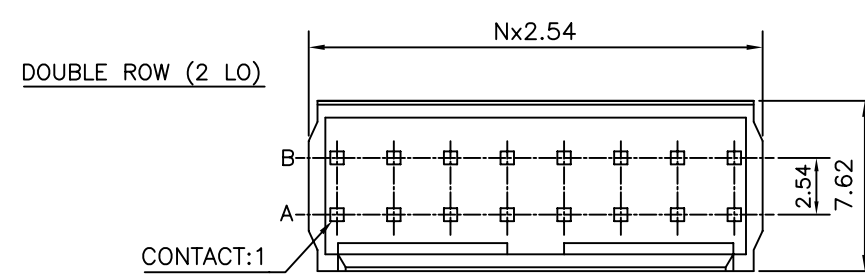
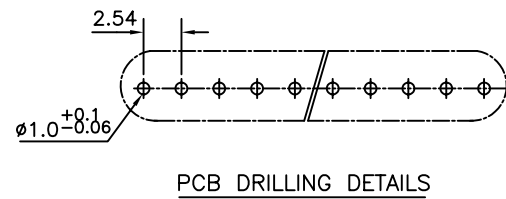


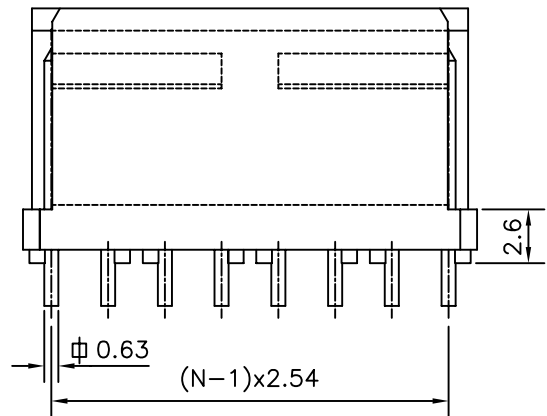

FCIconnect.com

Copyright FCI

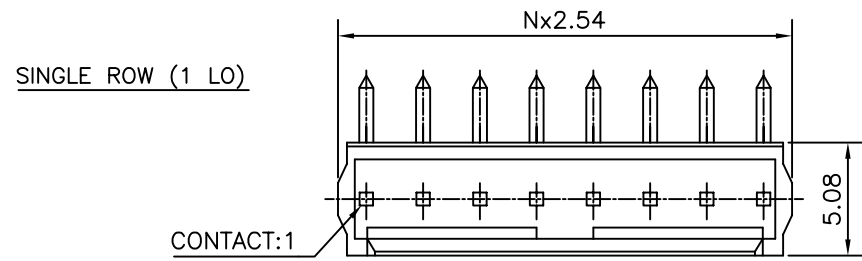

#### ORDERING INFORMATION




8614 SERIES	8614 - 10 - XX - X - XX - X - XX	LF :-LEAD FREE
20- SHROUDED MALE		
NO.OF CONTACTS		
2 TO 25,4 TO 50		
NO.OF ROWS		
1 - SINGLE ROW		
2 - DUAL ROW		
LO - RIGHT ANGLE SOLDER		
PLATING		
1 - TIN LEAD		
2 - 0.2 μAu		
3 - 0.75 μAu SELECTIVE		
4 - 0.2 μAu SELECTIVE		
5 - 1.27 μAu SELECTIVE		
6 - 0.75 μAu		
7 - GOLD FLASH SELECTIVE		
8 - 1.27 μAu SELECTIVE		
9 - 0.4 μ FULL GOLD		
10 - FULL GOLD FLASH(NOTE-2)		
11 - 0.75 μAu(w/o Ni undercoat)		
12 - 1.27 μAu + Au.Flash(NOTE-2)		
13 - 0.75 μAu +Au.Flash(NOTE-2)		
14 - 0.25 μAu. SELECTIVE		
15 - 0.25 μAu+Au.Flash(NOTE-2)		

#### NOTES :

- THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- SHELF LIFE : SIX MONTHS FROM DATE OF MANUFACTURING

#### TECHNICAL SPECIFICATION

INSULATOR MATERIAL	: SELF EXTINGUISHING THERMOPLASTIC (UL94 VO)
CONTACT MATERIAL	: COPPER ALLOY
MAXIMUM VOLTAGE	: 1000 V rms.
NOMINAL CURRENT	: 3A AT 20°C
INSULATION RESISTANCE	: ≥ 5000 MΩ
CONTACT RESISTANCE	: ≤ 20 mΩ
CLIMATIC CATAGORY	: -55°C TO +125°C / 21 DAYS EXPOSURE TO- INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

mat'l. code REF TECH SPEC				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 8614									
ltr	ecn no	dr	date	tolerances unless otherwise specified		<div>angles</div> <div>linear</div> <div>.0±0.1</div>				title SHROUDED MALE CONNECTOR (RIGHT ANGLE SOLDER)									
B	I06-0125	MKV	2003-06-20																
C	I06-0116	AB	2006-07-20																
D	I08-0006	MINI	2008-01-17																
				dr	MINI K VANDANATH		1998-12-06				dwg no				sheet 1 of 1		size		
				engr	JAI.K.A		1998-12-06				C-8614-0082				A3				
				chr	ALEX BABU		2008-01-17												
				appd	BIJU K P		2008-01-17												
sheet index		revision sheet		0	1														