
Roof/Body Mount Antennas

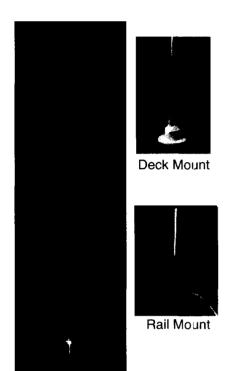

Standard Marine

Marine & Trucker Antennas Fiberglass

- High performance, 4 dB gain antenna with a 33" whip
- Fiberglass, weatherproof construction
- Needs no external ground plane; can even be mounted to a fiberglass surface
- Models with and without built-in mounts

Mobile Mark Marine & Trucker Cellular Antennas are constructed of fiberglass for durability and flexibility. A weatherproof finish protects it from all types of weather, harsh conditions, and salt water.

The antennas offer a high, 4 dB gain performance for extended coverage and reduced static. The whips have an attractive tapered appearance and are only 33 inches long; they are ideal for passing under low clearance areas such as small bridges.

All three models are voltage-fed: there is no need for an external ground plane and therefore mounting applications are not limited to a metal surface. These antennas

are frequently mounted directly to a fiberglass surface such as the deck or roof of a boat.

The antennas are pre-tuned in the factory and never need to be tuned in the field.

Three mounting options are available. The deluxe model, M4-900, comes with a built in mount and spring. The standard model, EM4-900, can be attached to any 1"-14 thread marine mount. The trucker model, T4-900, comes with a built in rail mount and spring. All three are easily connected and disconnected.

The antennas are supplied with TNC or Mini-UHF connectors, please specify. SMA adaptors are also available on request.

For the convenience of our customers, Mobile Mark now offers a standard marine mount for use with our EM4-900 marine antenna. The white plastic mount conforms to the industry standard of 1"-14 threads.

Model Numbers

EM4-900 4 dB, Uses a standard marine mount
M4-900 4 dB, Marine with deck mount
T4-900 4 dB, Trucker with rail mount
SPM Marine mount for EM4-900

Specifications:

825-895 MHz Frequency: Antenna Housing: **Fiberglass** 4 dB Gain: Mount: Nominal Impedance: 50 ohms Mounts to any standard 1"-14 EM4-900 thread mount, including the SPM Maximum Power: 50 watts Cable: White, RG58A/U, 15 ft (4.6m) mount now available Waterproof, molded white plastic Connector: M4-900 EM4-900 Attached TNC with stainless steel hardware M4-900 Loose TNC Anodized aluminum extrusions: T4-900 T4-900 Loose TNC mounts to rails from 1/2" to 1" Antenna Length: 33 in (84cm) diameter