


MOLDED TYPE POWER LINE CHOKES

MC16 SERIES

INDUCTANCE : 3.9 μ H to 18mH
 Temp. Range : -20°C to +140°C
 Tape and Reel Qtys : 1000 pcs./reel
 Flammability : UL-94V2 Rated
 Material : Polypropylene-Vz

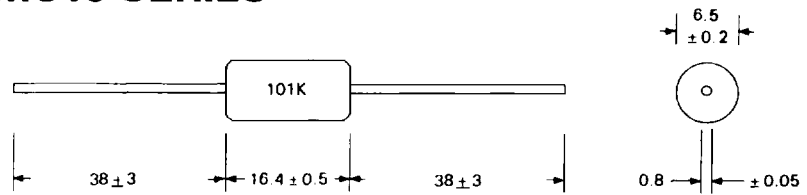

PART NO.	INDUCTANCE @ 1 KHz (μ H)	DC RESISTANCE MAX (Ω)	SUGGESTED CURRENT (Amps)
MC16-3R9K	3.9 \pm 10%	0.019	1.28
MC16-4R7K	4.7 \pm 10%	0.022	1.28
MC16-5R6K	5.6 \pm 10%	0.024	1.28
MC16-6R8K	6.8 \pm 10%	0.026	1.28
MC16-8R2K	8.2 \pm 10%	0.028	1.28
MC16-100K	10 \pm 10%	0.033	1.28
MC16-120K	12 \pm 10%	0.037	1.28
MC16-150K	15 \pm 10%	0.040	1.28
MC16-180K	18 \pm 10%	0.044	1.28
MC16-220K	22 \pm 10%	0.050	1.28
MC16-270K	27 \pm 10%	0.058	1.28
MC16-330K	33 \pm 10%	0.075	1.008
MC16-390K	39 \pm 10%	0.094	0.804
MC16-470K	47 \pm 10%	0.109	0.804
MC16-560K	56 \pm 10%	0.140	0.804
MC16-680K	68 \pm 10%	0.131	0.804
MC16-820K	82 \pm 10%	0.152	0.804
MC16-101K	100 \pm 10%	0.208	0.632
MC16-121K	120 \pm 10%	0.283	0.508
MC16-151K	150 \pm 10%	0.340	0.508
MC16-181K	180 \pm 10%	0.362	0.508
MC16-221K	220 \pm 10%	0.430	0.508
MC16-271K	270 \pm 10%	0.557	0.400
MC16-331K	330 \pm 10%	0.665	0.400
MC16-391K	390 \pm 10%	0.712	0.400
MC16-471K	470 \pm 10%	1.15	0.315
MC16-561K	560 \pm 10%	1.27	0.315
MC16-681K	680 \pm 10%	1.61	0.25
MC16-821K	820 \pm 10%	1.96	0.200
MC16-102K	1000 \pm 10%	2.30	0.200
MC16-122K	1200 \pm 10%	2.65	0.200
MC16-152K	1500 \pm 10%	3.45	0.158
MC16-182K	1800 \pm 10%	4.03	0.158
MC16-222K	2200 \pm 10%	4.48	0.158
MC16-272K	2700 \pm 10%	5.40	0.125
MC16-332K	3300 \pm 10%	6.56	0.125
MC16-392K	3900 \pm 10%	8.63	0.100
MC16-472K	4700 \pm 10%	9.66	0.100
MC16-562K	5600 \pm 10%	13.9	0.082
MC16-682K	6800 \pm 10%	16.3	0.082
MC16-822K	8200 \pm 10%	20.8	0.065
MC16-103K	10000 \pm 10%	26.4	0.050
MC16-123K	12000 \pm 10%	29.9	0.050
MC16-153K	15000 \pm 10%	42.5	0.039
MC16-183K	18000 \pm 10%	48.3	0.039