

A12 DIP PLUG (.1" x .1") LOW PROFILE

PITCH: 2.54mm

MATERIAL

INSULATOR - PET (UL 94V-0)
CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

30 MILLIOHM MAX.

INSULATION RESISTANCE


1000 MEGOHM MIN.

DIELECTRIC VOLTAGE



500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

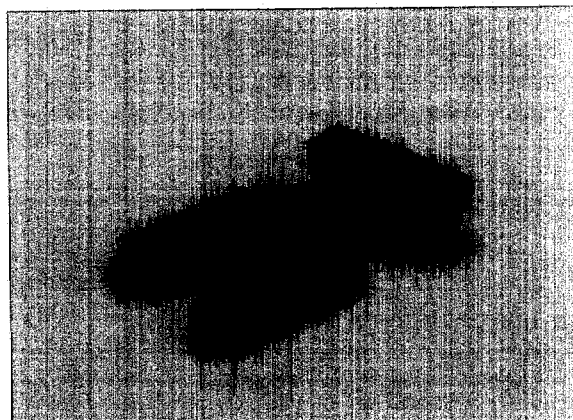

A

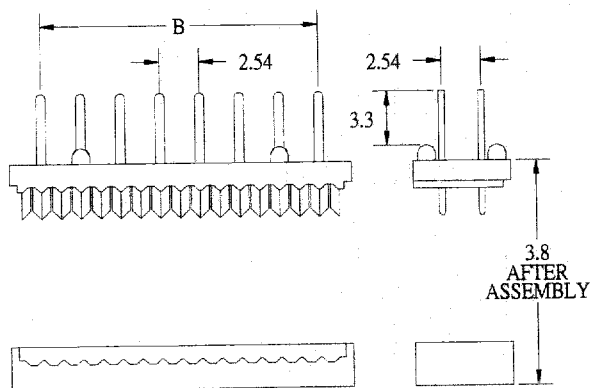

POSITION	A	B
14	19.40	15.24
16	22.10	17.78

1.NO. OF CONTACT

14 16

2.CONTACT MATERIAL

A: BRASS
B: PHOSPHOR BRONZE

3.CONTACT PLATING

T: TIN PLATED
S: SELECTIVE
G: GOLD FLASH
A: 5u" INCH GOLD
B: 10u" INCH GOLD
C: 15u" INCH GOLD
D: 30u" INCH GOLD

4.INSULATOR COLOR

1. BLACK
2. GREY

