


SURFACE MOUNT CLOCK OSCILLATOR DFN S11-MELPI (3.3 V) & DFN S11-MEDPI (2.5 V)

FEATURES
27 TO 800 MHz
Low noise PLL multiplication circuit
Low jitter
APPLICATIONS
Datacomms

Function	DFN S11
E / D	1
NC	2
GND	3
Output 1	4
Output 2	5
Vcc	6

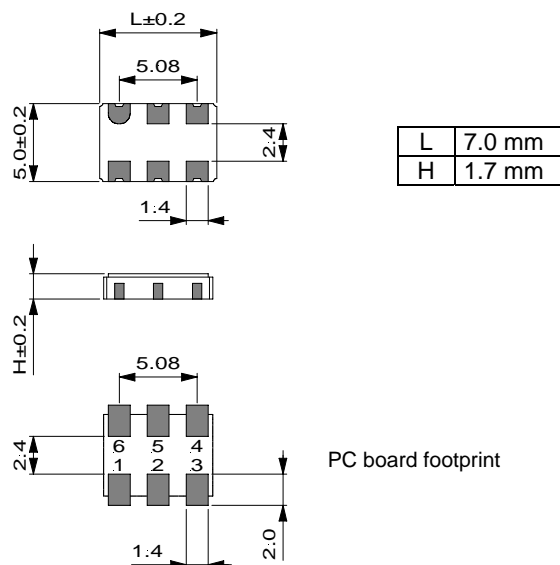

TYPE	DFN S11-MELPI	DFN S11-MEDPI
Frequency Range	27 to 800 MHz	

ELECTRICAL SPECIFICATIONS	DFN S11-MELPI	DFN S11-MEDPI
supply voltage	3.3 V ± 5 %	2.5 V ± 5 %
supply current (no load)	≤ 80 mA	≤ 80 mA
output load	LVPECL (50 Ω to 1.3 V)	LVPECL (50 Ω to 0.5 V)
duty cycle @ 50% level	45/55...55/45 %	45/55...55/45 %
rise/fall times (20 to 80%)	≤ 0.6 ns	≤ 0.6 ns
high/low levels	≥ 2.27 V / ≤ 1.68 V	≥ 1.47 V / ≤ 1.09 V
jitter RMS (12 kHz to 20 MHz)	≤ 3 ps	≤ 3 ps
enable / disable on pin 1	high or open = enable, low = disable	high or open = enable, low = disable
complementary output on pin 5	180° phase shifted	180° phase shifted
start up	≤ 10 ms @ 3.15 V	≤ 10 ms @ 2.37 V

FREQUENCY STABILITY		stability [ppm] and temperature code					
types	temperature range	stability	code	stability	code	stability	code
all types	0 to 70°C	≤ ± 25	XB25	≤ ± 50	XB50	≤ ± 100	XB100
	-40 to 85°C	≤ ± 50	XE50	≤ ± 75	XE75	≤ ± 100	XE100
remarks		stability includes calibration at 25°C, temperature, ageing, Vcc and load changes 1 st yr.					

OPTIONS			
stability over long life time	A = 5 years	B = 10 years	C = 15 years

ORDERING CODE	type + option code + frequency + stability/temperature code
Example	DFN S11-MELPI 622.08 MHz XB25

REMARK	Please consult factory for life time/stabilities possible combinations
--------	--