



5SC4

Features

DC/DC converter

Switching power supply

High current capacity with Small Package

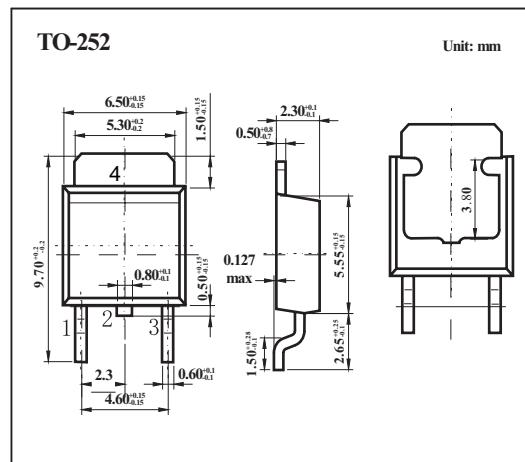

Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	40	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _{RM}		
RMS Reverse Voltage	V _{R(RMS)}		
Average Rectified Output Current	I _O	3	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	80	A
Thermal Resistance Junction to Ambient	R _{JA}	57	/W
Junction Temperature	T _J	150	
Storage temperature range	T _{STG}	-40 to 150	

Electrical Characteristics Ta = 25

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Reverse breakdown voltage	V _R	I _R = 100µA	40			V
Forward voltage	V _F	I _F =2.5A, T _J =25			0.58	
Reverse voltage leakage current	I _R	V _R =40V ,T _J =25			3.6	mA
Junction Capacitance	C _j	V _R =10V,f=1MHz		160		pF