
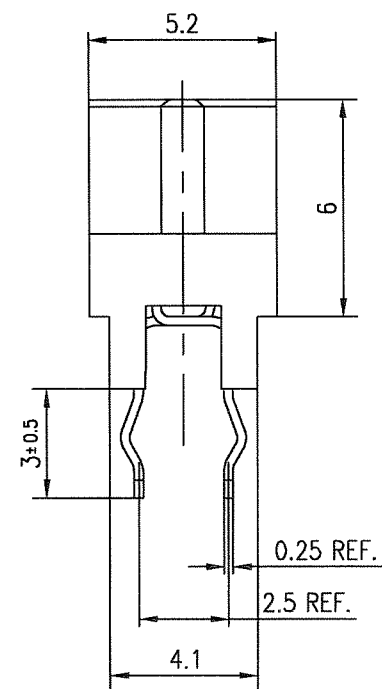
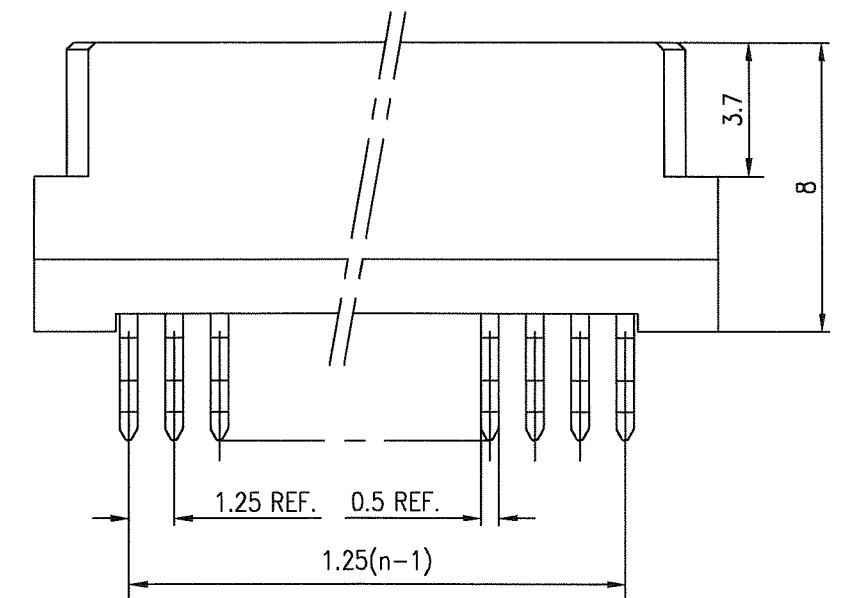


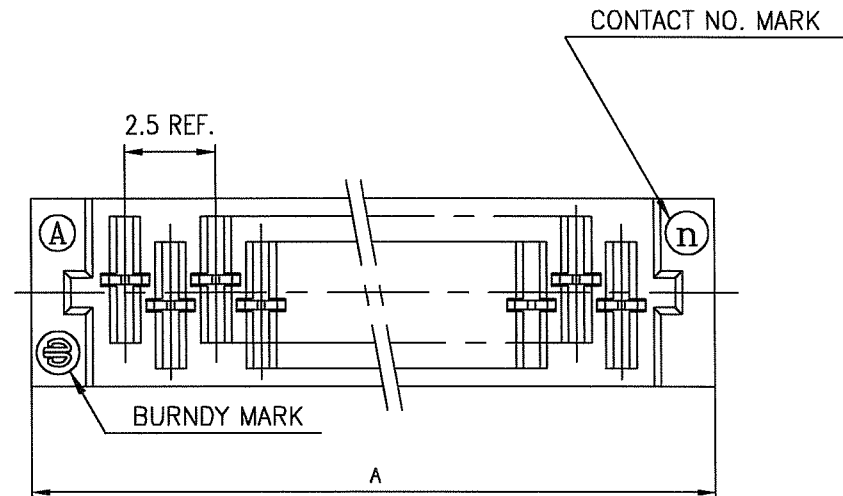


RECOMMENDED PC BOARD

THICKNESS : 1.4 ~ 1.8

HOLE PATTERN (COMPONENT SIDE)

n : NO. OF CONTACTS

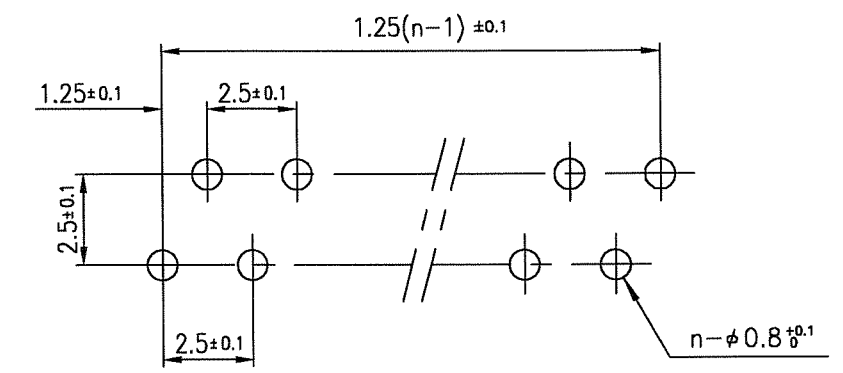

CAT. NO.	NO. OF CONTACTS (n)	A
BTFN6S-3SB7LF	6	11.45
BTFN8S-3SB7LF	8	13.95
BTFN10S-3SB7LF	10	16.45
BTFN12S-3SB7LF	12	18.95
BTFN14S-3SB7LF	14	21.45
BTFN16S-3SB7LF	16	23.95
BTFN18S-3SB7LF	18	26.45
BTFN20S-3SB7LF	20	28.95

n : NO. OF CONTACTS

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

MATERIAL

INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE
Sn Ni UNDER PLATED

mat'l. code					surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family 58ZF	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		mm	title RECEPTACLE CONNECTOR (DIP) (Cat. No. BTFN__S-3SB7LF)	
A	RELEASED	J05-0439	H.T	7/12/05	angles	linear			
B	CHANGED LOGO	J06-0466	H.T	11/13/06			scale	dwg no	sheet 1 of 1
					dr			JSC 96579	size
					enr				A3
					chr				
					appd				
sheet index	revision sheet	B	1					type	Product Customer Drawing
								Rev.	B