


HiPerFET™ Power MOSFETs

N-Channel Enhancement Mode
High dv/dt, Low t_{rr} , HDMOS™ Family

IXFH/IXFM21N50
IXFH/IXFM/IXFT24N50
IXFH/IXFT26N50




V_{DSS}	I_{D25}	$R_{DS(on)}$
500 V	21 A	0.25 Ω
500 V	24 A	0.23 Ω
500 V	26 A	0.20 Ω


$t_{rr} \leq 250$ ns

Symbol	Test Conditions	Maximum Ratings		
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	500		V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1\text{ M}\Omega$	500		V
V_{GS}	Continuous	± 20		V
V_{GSM}	Transient	± 30		V
I_{D25}	$T_c = 25^\circ\text{C}$	21N50 24N50 26N50	21 24 26	A
I_{DM}	$T_c = 25^\circ\text{C}$, pulse width limited by T_{JM}	21N50 24N50 26N50	84 96 104	A
I_{AR}	$T_c = 25^\circ\text{C}$	21N50 24N50 26N50	21 24 26	A
E_{AR}	$T_c = 25^\circ\text{C}$	30		mJ
dv/dt	$I_s \leq I_{DM}$, $di/dt \leq 100\text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ\text{C}$, $R_G = 2\Omega$	5		V/ns
P_D	$T_c = 25^\circ\text{C}$	300		W
T_J		-55 ... +150		°C
T_{JM}		150		°C
T_{stg}		-55 ... +150		°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300		°C
M_d	Mounting torque	1.13/10		Nm/lb.in.
Weight		TO-204 = 18 g, TO-247 = 6 g		


TO-247 AD (IXFH)

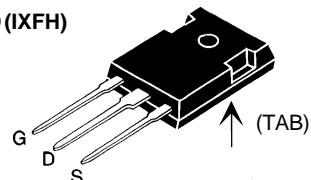

TO-268 (D3) Case Style

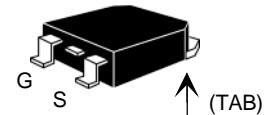

TO-204 AE (IXFM)



G = Gate,
S = Source,

D = Drain,
TAB = Drain

Features

- International standard packages
- Low $R_{DS(on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
 - easy to drive and to protect
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control
- Temperature and lighting controls
- Low voltage relays

Advantages

- Easy to mount with 1 screw (TO-247) (isolated mounting screw hole)
- High power surface mountable package
- High power density

Symbol	Test Conditions	Characteristic Values		
		($T_J = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
V_{DSS}	$V_{GS} = 0\text{ V}$, $I_D = 250\text{ }\mu\text{A}$	500		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 4\text{ mA}$	2	4	V
I_{GSS}	$V_{GS} = \pm 20\text{ V}_{DC}$, $V_{DS} = 0$		± 100	nA
I_{DSS}	$V_{DS} = 0.8 \cdot V_{DSS}$ $V_{GS} = 0\text{ V}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	200 1	μA mA

IXYS reserves the right to change limits, test conditions, and dimensions.

91525H (9/99)

© 2000 IXYS All rights reserved

1 - 2

Symbol **Test Conditions**
 $(T_J = 25^\circ\text{C}$, unless otherwise specified)


Characteristic Values				
		Min.	Typ.	Max.
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}, I_D = 0.5 I_{D25}$	21N50 24N50 26N50		0.25 Ω 0.23 Ω 0.20 Ω
	Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$			
g_{fs}	$V_{DS} = 10 \text{ V}; I_D = 0.5 I_{D25}$, pulse test	11	21	S
C_{iss} C_{oss} C_{rss}	$V_{GS} = 0 \text{ V}, V_{DS} = 25 \text{ V}, f = 1 \text{ MHz}$	4200 450 135		pF pF pF
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}$ $R_G = 2 \Omega$ (External)	16 33 65 30	25 45 80 40	ns ns ns ns
$Q_{g(on)}$ Q_{gs} Q_{gd}	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}$	135 28 62	160 40 85	nC nC nC
R_{thJC} R_{thCK}	(TO-247 Case Style)	0.25	0.42	K/W K/W

Source-Drain Diode

Characteristic Values


 $(T_J = 25^\circ\text{C}$, unless otherwise specified)

Characteristic Values				
		Min.	Typ.	Max.
I_s	$V_{GS} = 0 \text{ V}$	21N50 24N50 26N50		21 A 24 A 26 A
I_{SM}	Repetitive; pulse width limited by T_{JM}	21N50 24N50 26N50		84 A 96 A 104 A
V_{SD}	$I_F = I_s, V_{GS} = 0 \text{ V}$, Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$			1.5 V
t_{rr}	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		250 ns 400 ns	
Q_{RM}	$I_F = I_s$ $-di/dt = 100 \text{ A}/\mu\text{s}$, $V_R = 100 \text{ V}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	1 μC 2 μC	
I_{RM}		$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	10 A 15 A	

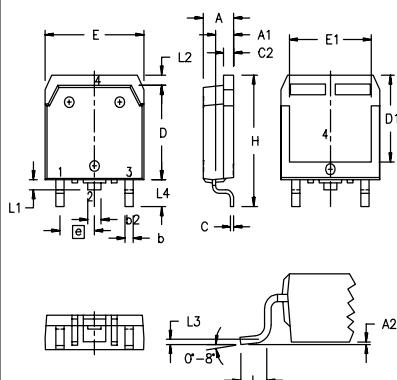TO-268AA (D³ PAK)


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.9	5.1	.193	.201
A ₁	2.7	2.9	.106	.114
A ₂	.02	.25	.001	.010
b	1.15	1.45	.045	.057
b ₂	1.9	2.1	.75	.83
C	.4	.65	.016	.026
D	13.80	14.00	.543	.551
E	15.85	16.05	.624	.632
E ₁	13.3	13.6	.524	.535
e	5.45	BSC	.215	BSC
H	18.70	19.10	.736	.752
L	2.40	2.70	.094	.106
L1	1.20	1.40	.047	.055
L2	1.00	1.15	.039	.045
L3	0.25	BSC	.010	BSC
L4	3.80	4.10	.150	.161

TO-247 AD (IXFH) Outline

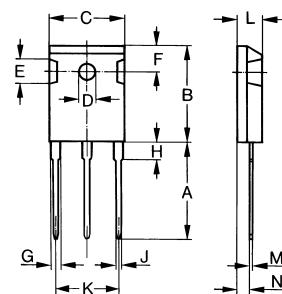

Dim.	Millimeter	
	Min.	Max.
A	19.81	20.32
B	20.80	21.46
C	15.75	16.26
D	3.55	3.65
E	4.32	5.49
F	5.4	6.2
G	1.65	2.13
H	-	4.5
J	1.0	1.4
K	10.8	11.0
L	4.7	5.3
M	0.4	0.8
N	1.5	2.49
	0.087	0.102

TO-204 AE (IXFM) Outline



Dim.	Millimeter	
	Min.	Max.
A	38.61	39.12
B	-	22.22
C	6.40	11.40
D	1.45	1.60
E	1.52	3.43
F	30.15	BSC
G	10.67	11.17
H	5.21	5.71
J	16.64	17.14
K	11.18	12.19
Q	3.84	4.19
R	25.16	26.66
	0.151	0.165
	0.991	1.050

Min. Recommended Footprint

