


SPECIFICATION CONTROL DRAWING

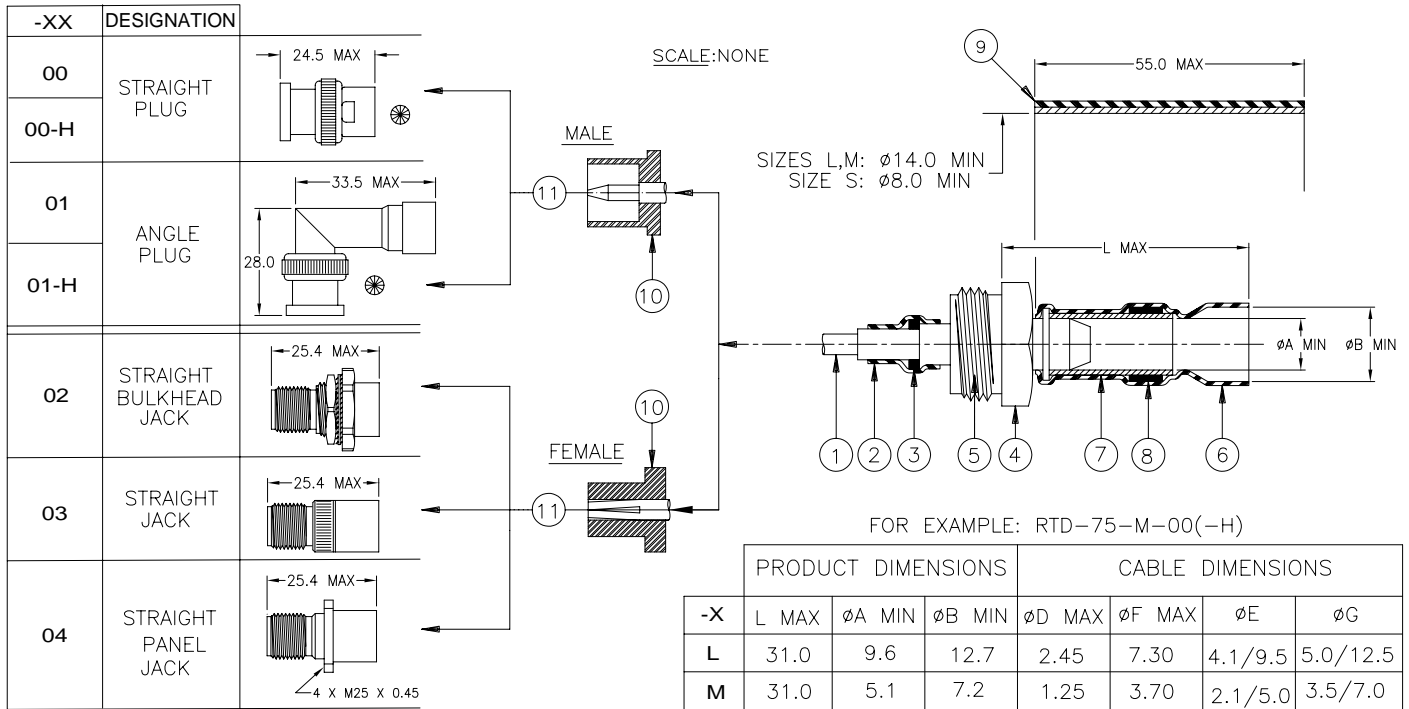

⊗ -H PARTS HAVE HEX NUT COUPLING WITH LOCK WIRE HOLES.

MATERIAL:


1. CENTER CONTACT. GOLD PLATED BRASS (MALE) OR GOLD BERYLLIUM COPPER (FEMALE).
- 2,6. HEAT SHRINKABLE INSULATION SLEEVE, TRANSPARENT BLUE. RADIATION CROSS-LINKED MODIFIED POLYVINYLIDENE FLOURIDE.
3. SOLDER PREFORM. Sn63 Pb37 SOLDER ALLOY WITH MILDLY ACTIVATED ROSIN FLUX.
4. THREADED TRANSITION PART. SILVER PLATED BRASS.
5. INSULATOR. PTFE.
7. SOLDERSHIELD DEVICE. TIN PLATED COPPER BRAID WITH ACTIVATED ROSIN FLUX.
8. SOLDER PREFORM (ON L AND M SIZE ONLY). Sn63 Pb37 SOLDER ALLOY WITH MILDLY ACTIVATED ROSIN FLUX.
9. HEAT SHRINKABLE INSULATION SLEEVE, BLACK. RADIATION CROSS-LINKED MODIFIED POLYOLEFIN WITH ADHESIVE.
10. INSULATOR (EXCEPT FOR ANGLE PLUG), PTFE.
11. BODY, NICKEL PLATED BRASS.

APPLICATION:


1. THESE CONTROLLED SOLDERING DEVICES ARE DESIGNED TO CONNECT, WITH A MIL-C-390128 TNC INTERMATEABLE PART, A 75Ω SINGLE OR DOUBLE BRAIDED COAXIAL HAVING A:
 - TIN OR SILVER PLATED COPPER OUTER CONDUCTOR.
 - TIN OR SILVER PLATED INNER CONDUCTOR.
 AND INSULATION RATED FOR AT LEAST +85°C.
2. TEMPERATURE RANGE:
 - * WITH BLACK SLEEVE: -55°C TO 100°C.
 - * WITHOUT BLACK SLEEVE: -55°C TO 150°C.
3. FOR INSTALLATION PROCEDURE AND APPLICATION EQUIPMENT, CONSULT RPIP-683-00.

FOR BEST RESULTS, PREPARE THE CABLE AS SHOWN:


PANEL THICKNESS: 3.2 MAX

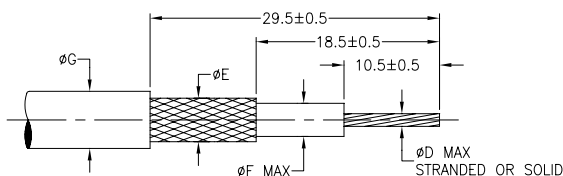

For RTD-75-X-02



For RTD-75-X-04

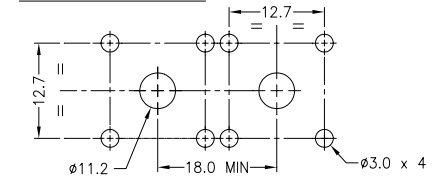

If this document is printed it becomes uncontrolled.
Check for the latest revision.

© 2005 Tyco Electronics Corporation. All rights reserved.

| | | | | | | | | | | |
|---|----------------------|--|------------|---|---------------------|---|-----------------|------------------|------------------|--|
| <div><div>tyco</div><div>Electronics</div></div> | | Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 | | Raychem | | TITLE: ONE STEP RF CONNECTOR 75-OHM TNC | | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. | | | | | | DOCUMENT NO: RTD-75-X-XX/-XX-H | | | | |
| TOLERANCES: 0.00 <div></div> 0.0 <div></div> 0 <div></div> | | ANGLES: <div></div> ROUGHNESS IN MICRON | | TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION. | | | | | | |
| CAD FILE: D050233 | REPLACES: D030314 | DRAWN: mforonda | SIZE: A | SCALE: <div></div> | CAGE CODE: 06090 | PROD. REV.: A | DOC. REV.: 2 | DATE: 6/13/05 | SHEET: 1 OF 1 | |